

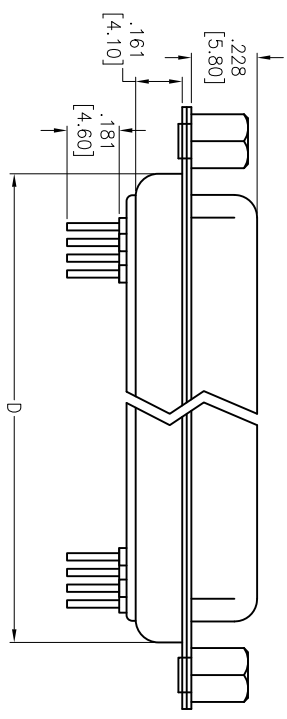
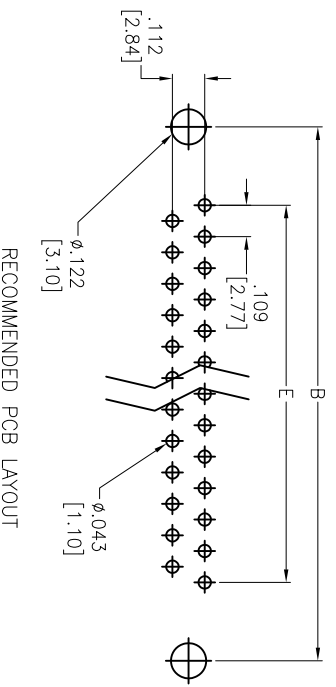


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date     | Appr |
|-----|-------|-------------|----------|------|
| -   |       | RELEASED    | 04/27/06 |      |
| A   |       | REDRAWN     | 03/28/13 |      |

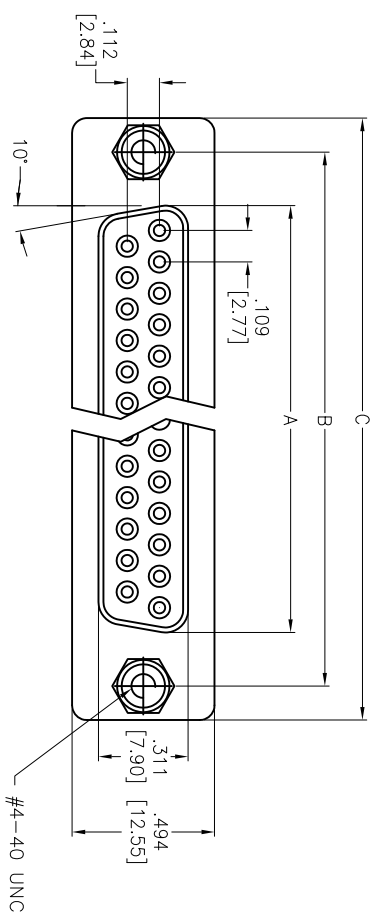

| Positions | DIMENSIONS    |               |               |               |               |
|-----------|---------------|---------------|---------------|---------------|---------------|
|           | A             | B             | C             | D             | E             |
| 9         | .643 [16.33]  | .984 [24.99]  | 1.213 [30.81] | .756 [19.20]  | .436 [11.08]  |
| 15        | .972 [24.70]  | 1.311 [33.30] | 1.543 [39.20] | 1.091 [27.70] | .763 [19.39]  |
| 25        | 1.512 [38.40] | 1.852 [47.04] | 2.089 [53.05] | 1.618 [41.10] | 1.309 [33.24] |
| 37        | 2.157 [54.80] | 2.500 [63.50] | 2.732 [69.40] | 2.256 [57.30] | 1.963 [49.86] |

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB SOCKET, STANDARD PROFILE  
 RIVETED #4-40 JACKSCREWS

**SPECIFICATIONS:**  
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Shell: Steel, Tin plated  
 Clinch Nut: Brass, Nickel plated  
 Screwlock: Brass, Nickel plated  
 Plating:  
 Gold flash over Nickel underplate overall  
**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -55°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES Holes ±.10  
 .XX ±.020  
 .XXX ±.015  
 APPROVALS: DATE

|          |     |          |
|----------|-----|----------|
| DRAWN    | LFJ | 04/27/06 |
| CHECKED  |     |          |
| APPROVED |     |          |

|      |              |              |
|------|--------------|--------------|
| SIZE | PART NO.     | REV.         |
| X    | DXXX-ST-1-JS | A            |
| REF: | S00087T      | SCALE: NTS   |
|      |              | SHEET 1 OF 1 |

