

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
FT	0	A4	REVISED PER ECO-12-016943		02NOV12	KH	MB



**MATERIALS:**  
 HOUSING: PA66, UL94V-0, GREEN.  
 SCREWS; M2.5, STEEL, ZINC CHROMATE.  
 CAGE: BRASS, NICKEL PLATE.  
 CLAMP: PHOS BRONZE, NICKEL PLATE.

**MECHANICAL:**  
 TIGHTENING TORQUE: 3.5 IN-LB MAX.


**ELECTRICAL:**  
 CURRENT: 15A  
 VOLTAGE: 300V  
 WITHSTAND VOLTAGE: AC1500V/ 1MIN  
 INSULATION RESISTANCE: 5000Mohm/1000V  
 CLAMP RESISTANCE: 20mohm  
 WIRE RANGE: 12-28 AWG

**ENVIRONMENTAL:**  
 OPERATING TEMP.: -40° TO +105°C  
 MAX SOLDERING: +250°C, 5 SECONDS

1 MARKED WITH WHITE PERMANENT INK.  
 2 PRELIMINARY PART NUMBER.

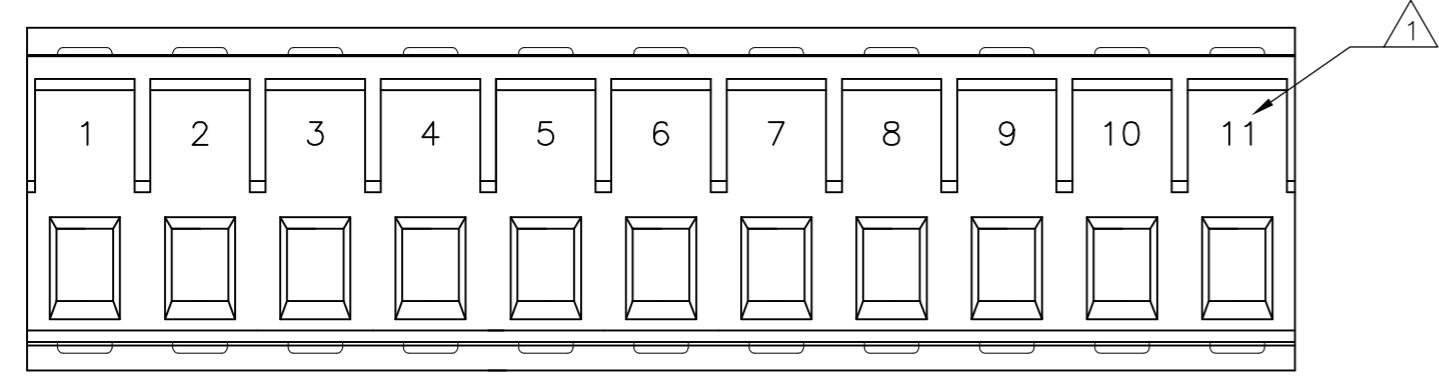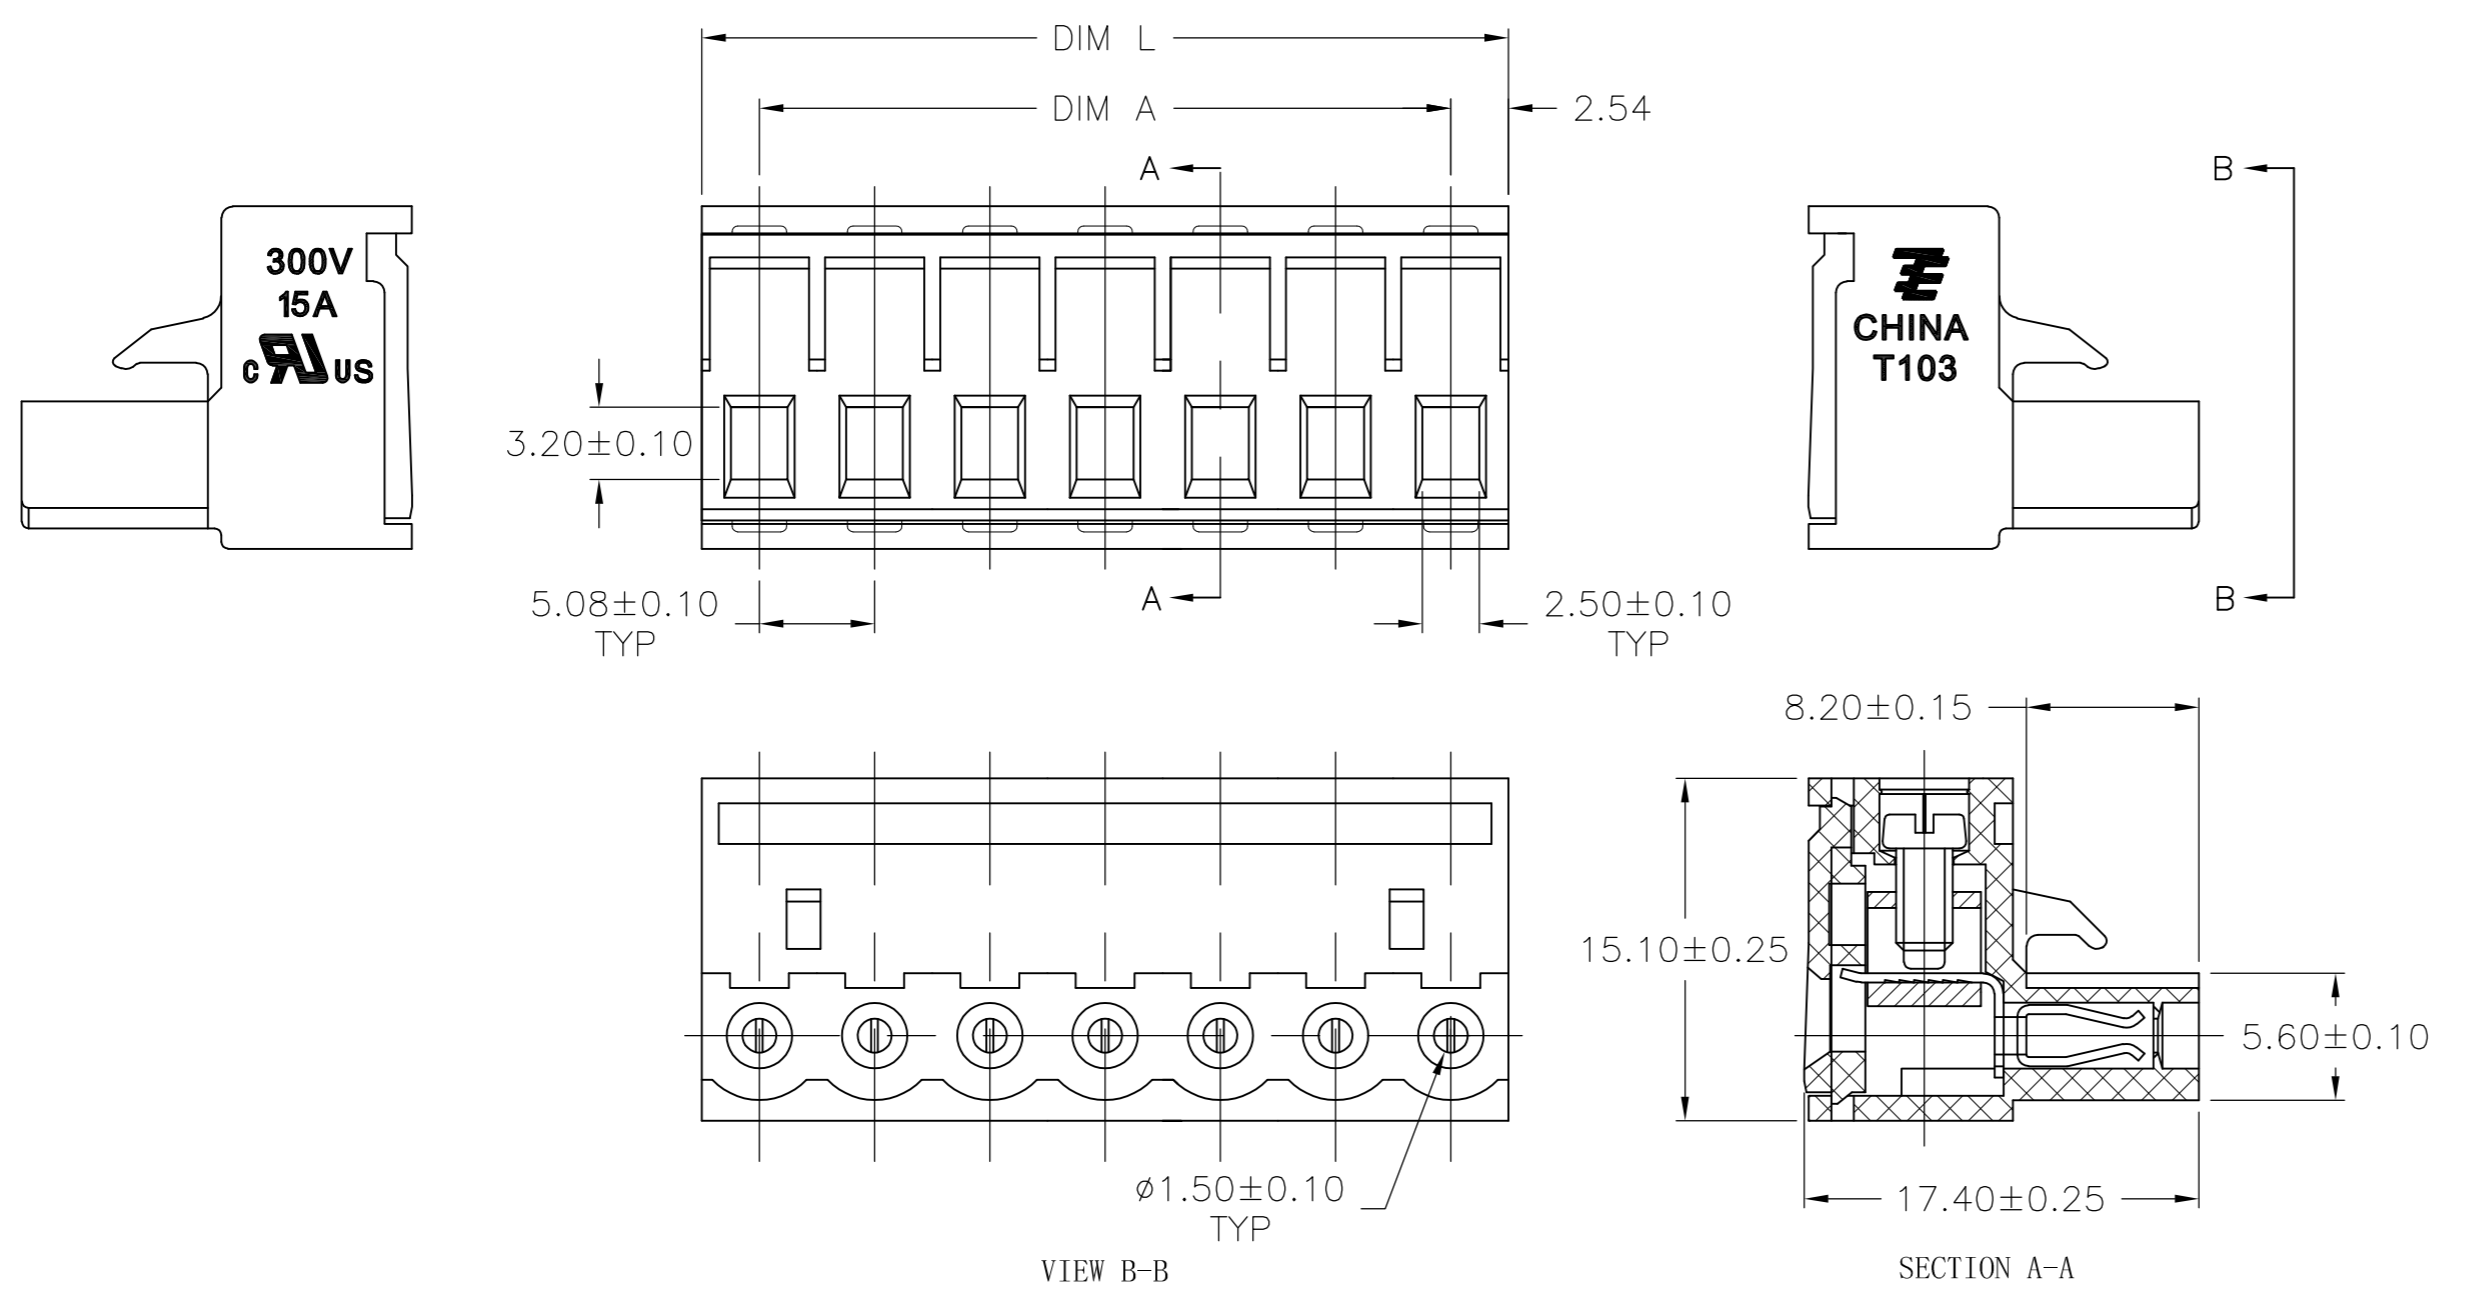

4-1776911-1

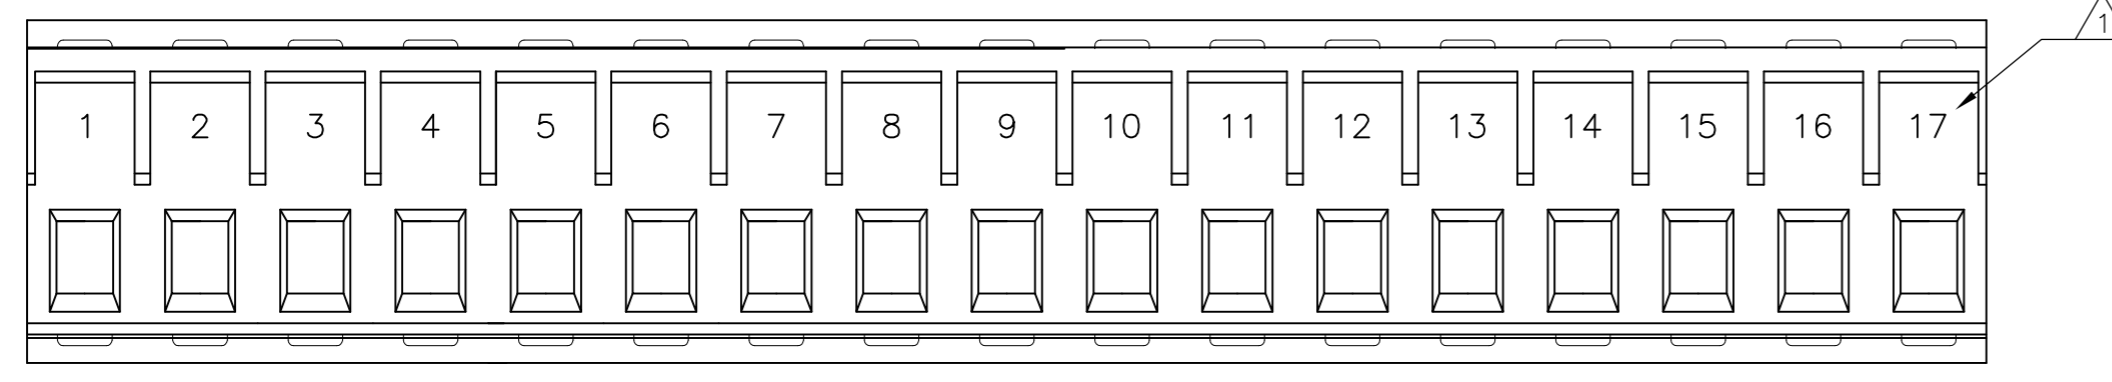

4-1776911-7

OBsolete	SEE FIGURE	66.04±0.30	60.96±0.30	17	4-1776911-7
2	-	50.80±0.30	45.72±0.30	12	1-1776911-2
2	SEE FIGURE	45.72±0.30	40.64±0.30	11	4-1776911-1
2	-	25.40±0.20	20.32±0.20	4	1776911-4
2	-	15.24±0.20	10.16±0.20	3	1776911-3
NOTES		DIM L	DIM A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	S SCHLEGEL	02MAR2007
CHK	C RICHARD	3/2/07
APVD	C RICHARD	3/2/07

**TE** TE Connectivity

NAME: TERMINAL BLOCK, R/A PLUG, 5.08mm

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1776911	-

CUSTOMER DRAWING SCALE NTS SHEET 1 of 1 REV A4