

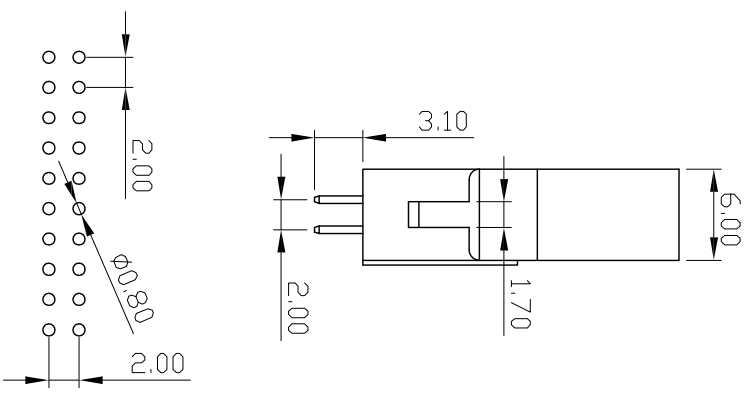


REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12


NOTES:
 Insulator Material: PBT, UL 94V-0
 Contact Plating: TIN, 80-100 μ m
 Contact Material: Brass

Current Rating : 1A AC,DC
 Contact Resistance: 20M Ω Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000M Ω Min.
 Operating Temp.: -40°C~+105°C

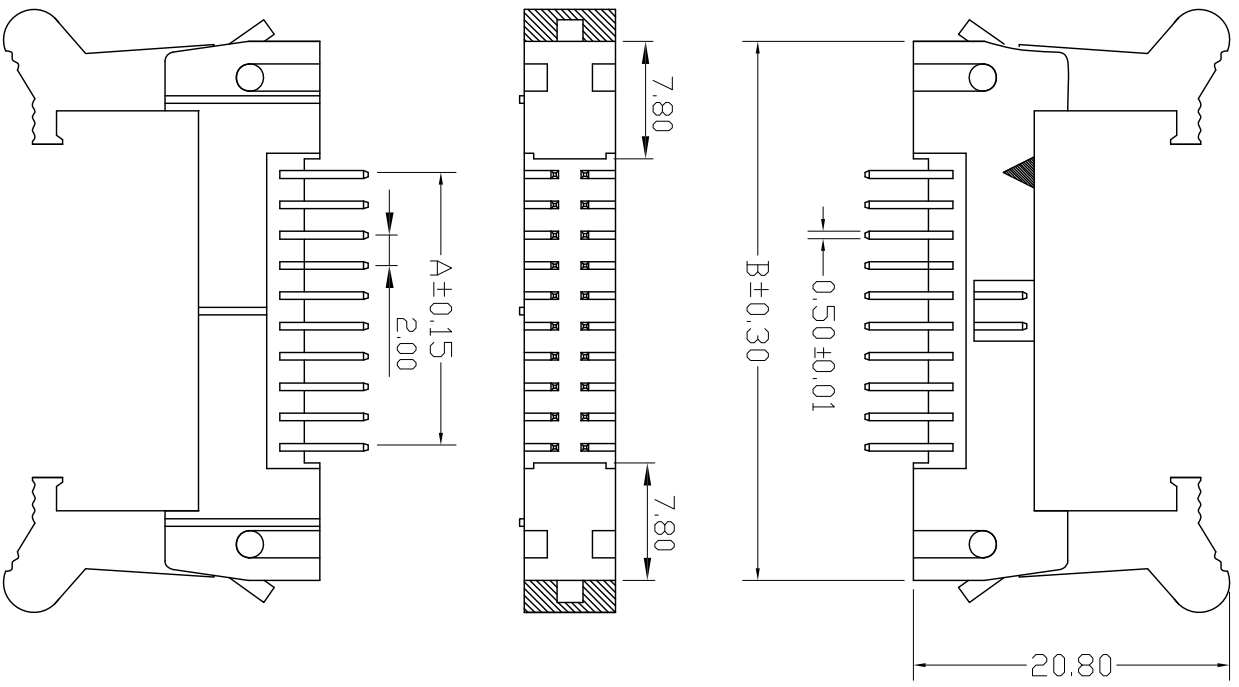

NUMBER OF POSITIONS	DIMENSIONS	
	A	B
06	4.00	21.60
08	6.00	23.60
10	8.00	25.60
12	10.00	27.60
14	12.00	29.60
16	14.00	31.60
20	18.00	35.60
24	22.00	39.60
26	24.00	41.60
30	28.00	45.60
34	32.00	49.60
40	38.00	55.60
44	42.00	59.60
50	48.00	65.60
60	58.00	75.60

UNLESS TOLERANCE		DRAW BY
GENERAL	ANGLE	DESIGN BY
X. ± 0.30	X°. ± 3.0°	CHECK BY
.X ± 0.20	.X°. ± 2.0°	APPROVE BY
.XX ± 0.15	.XX°. ± 1.0°	SCALE
.XXX ± 0.08	.XXX°. ± 0.5°	SHEET
		UNIT



CnC Tech,LLC

Part No. 3110-XX-001-13-99

SCALE: 1:1 SHEET: 1/1 UNIT: MM

DRAW NO.: REV: A