

工	G	П	m	D	0



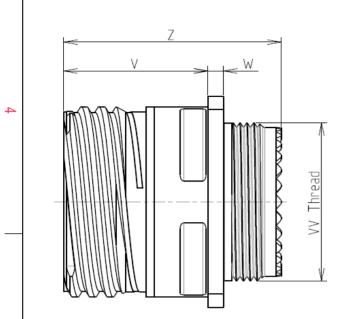

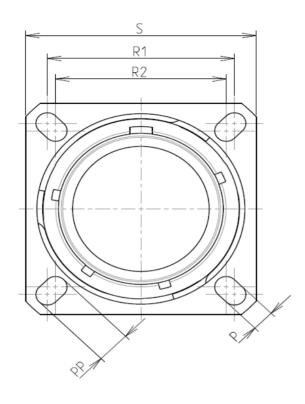

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 29.53 g ± 10%

8D 0

G

11

S

01

Ρ


F

Ν

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 20.62 R1 18.26 R2 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M15x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

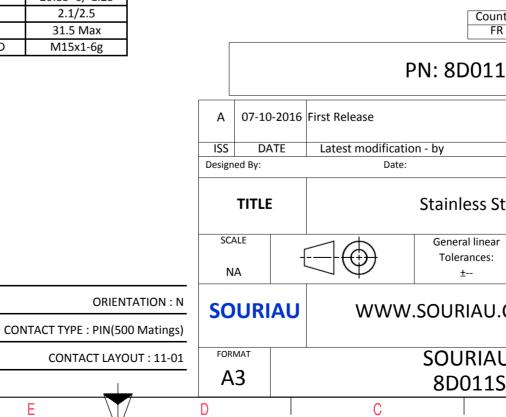

σ		A			
				4	
AS EXAMPLE				3	
any non-conformi which does not co or of the Parties or I ndation, technical n untry Jurisc FR 1SO1PN	mply with by a third par	ty trol List		2	
	CUSTOME	R DRAWING	MOD N°		
Steel Receptacle 8D series					
ar		/ PROJECT 359		1	
I.COM	This document is the property of				
U DRG N° S01PN-C	1		SHEET		
B		A	,-	J	
<u> </u>					

r	т	۵	ات	m	D	0
		Contact Layout				Panel Cutout
4	(01				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A	1#12 11-01 X Y 0 0			<u>v</u>	Dim
ω						ØA ØAA R1 ØT
	 -					SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
N					A 07-10-202	Country FR PN: 8D011S
					ISS DATE Designed By: TITLE	Latest modification - by Date: Stainless Ste
_ _					SCALE NA	General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011S0
L	Н	G	F	E	D	С

