

# Cylindrical Proximity Sensor E2A3

## High Quality for Extra Long Distance

- CENELEC triple-distance operation.
- Normally open (NO), and normally closed (NC) models are available.
- Stainless steel and brass housings.
- 360° angle indicators

**<READ AND UNDERSTAND THIS CATALOG>**

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.



## Ordering Information

### DC 3-wire Models

Size	Type	Sensing distance	Connection	Body material	Thread length	Output	Operation mode: NO	Operation mode: NC
M8	Shielded	3.0mm	Pre-wired	Stainless steel (See note.)	27 (40) mm	PNP	E2A3-S08KS03-WP-B1 2M	E2A3-S08KS03-WP-B2 2M
						NPN	E2A3-S08KS03-WP-C1 2M	E2A3-S08KS03-WP-C2 2M
			M12 connector		27 (44) mm	PNP	E2A3-S08KS03-M1-B1	E2A3-S08KS03-M1-B2
						NPN	E2A3-S08KS03-M1-C1	E2A3-S08KS03-M1-C2
			M8 connector (3-pin)		27 (40) mm	PNP	E2A3-S08KS03-M5-B1	E2A3-S08KS03-M5-B2
						NPN	E2A3-S08KS03-M5-C1	E2A3-S08KS03-M5-C2
M12	Shielded	6.0mm	Pre-wired	Brass	34 (50) mm	PNP	E2A3-M12KS06-WP-B1 2M	E2A3-M12KS06-WP-B2 2M
						NPN	E2A3-M12KS06-WP-C1 2M	E2A3-M12KS06-WP-C2 2M
			M12 connector		34 (49) mm	PNP	E2A3-M12KS06-M1-B1	E2A3-M12KS06-M1-B2
						NPN	E2A3-M12KS06-M1-C1	E2A3-M12KS06-M1-C2
			Pre-wired		39 (60) mm	PNP	E2A3-M18KS11-WP-B1 2M	E2A3-M18KS11-WP-B2 2M
						NPN	E2A3-M18KS11-WP-C1 2M	E2A3-M18KS11-WP-C2 2M
M12 connector	39 (54) mm	PNP	E2A3-M18KS11-M1-B1	E2A3-M18KS11-M1-B2				
		NPN	E2A3-M18KS11-M1-C1	E2A3-M18KS11-M1-C2				
M30	Shielded	20.0mm	Pre-wired	Brass	44 (65) mm	PNP	E2A3-M30KS20-WP-B1 2M	E2A3-M30KS20-WP-B2 2M
						NPN	E2A3-M30KS20-WP-C1 2M	E2A3-M30KS20-WP-C2 2M
			M12 connector		44 (59) mm	PNP	E2A3-M30KS20-M1-B1	E2A3-M30KS20-M1-B2
						NPN	E2A3-M30KS20-M1-C1	E2A3-M30KS20-M1-C2

**Note:** Material specifications for stainless steel housing case: 1.4305 (W.-No.), SUS303 (AISI), 2346 (SS).

## Connectivity

E2A3 Sensors are available with the following connectors and cable materials:

### Pre-wired Models



Standard cable lengths are 2 m and 5 m.  
For other cable lengths, please contact your OMRON representative.

Standard cable material: PVC (4-mm dia.) -WP

### Model Number Legend

**E2A**□-□□□□□□-□-□□□□□□

1 2 3 4 5 6 7 8 9 10 11 12

**Example:** E2A3-M12KS06-M1-B1 Triple distance, M12, standard barrel, shielded, Sn = 6 mm, M12 connector, PNP-NO  
E2A3-S08KS03-WP-B1 2M Triple distance, M8 stainless steel, standard barrel, shielded, Sn = 3 mm, pre-wired PVC cable, PNP-NO, cable length = 2 m

#### 1. Basic name

E2A

#### 2. Sensing technology

Blank: Standard double distance

3: Triple distance

#### 3. Housing shape and material

M: Cylindrical, metric threaded, brass

S: Cylindrical, metric threaded, stainless steel

#### 4. Housing size

08: 8 mm

12: 12 mm

18: 18 mm

30: 30 mm

#### 5. Barrel length

K: Standard length

L: Long body

#### 6. Shield

S: Shielded

N: Non-shielded

#### 7. Sensing distance

Numeral: Sensing distance: e.g., 03 = 3 mm, 11 = 11 mm

### Connector Models



Standard connectors: M12, M8 (3-pin)

-M1, -M5

#### 8. Kind of connection

WP: Pre-wired, PVC, 4-mm dia.

M1: M12 connector (4-pin) \*

M5: M8 connector (3-pin)

#### 9. Power source and output

B: DC, 3-wire, PNP open collector

C: DC, 3-wire, NPN open collector

#### 10. Operation mode

1: Normally open (NO)

2: Normally closed (NC)

#### 11. Specials (e.g., cable material, oscillating frequency)

#### 12. Cable length

Blank: Connector Model

Numeral: Cable length

## Specifications

### DC 3-wire Models


Size		M8	M12	M18	M30
Type		Shielded	Shielded	Shielded	Shielded
Item		E2A3-S08KS03-□□-B□ E2A3-S08KS03-□□-C□	E2A3-M12KS06-□□-B□ E2A3-M12KS06-□□-C□	E2A3-M18KS11-□□-B□ E2A3-M18KS11-□□-C□	E2A3-M30KS20-□□-B□ E2A3-M30KS20-□□-C□
Sensing distance		3 mm ± 10%	6 mm ± 10%	11 mm ± 10%	20 mm ± 10%
Setting distance	Ambient temp. of -25 to 70°C	0 to 2.1 mm	0 to 4.2 mm	0 to 7.7 mm	0 to 14 mm
	Ambient temp. of -10 to 60°C	0 to 2.4 mm	0 to 4.8 mm	0 to 8.8 mm	0 to 16 mm
Differential travel		20% max. of sensing distance			
Target		Ferrous metal (The sensing distance decreases with non-ferrous metal.)			
Standard sensing object		9 × 9 × 1 mm	18 × 18 × 1 mm	33 × 33 × 1 mm	60 × 60 × 1 mm
Response frequency (See note 1.)		700 Hz	350 Hz	250 Hz	80 Hz
Power supply voltage (operating voltage range)		12 to 24 VDC. Ripple (p-p): 10% max. (10 to 32 VDC)			
Current consumption		10 mA max.			
Output type		-B models: PNP open collector -C models: NPN open collector			
Control output	Load current	200 mA max. (32 VDC max.)			
	Residual voltage	2 V max. (under load current of 200 mA with cable length of 2 m)			
Indicator		Operation indicator (Yellow LED)			
Operation mode		-B1/-C1 models: NO -B2/-C2 models: NC For details, refer to the timing charts.			
Protection circuits		Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection	Output reverse polarity protection, Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection		
Ambient air temperature		Operating: -25°C to 70°C, Storage: -25°C to 70°C			
Temperature influence		±20% max. of sensing distance at 23°C within temperature range of -25°C to 70°C -10% max. to +20% of sensing distance at 23°C within temperature range of -10°C to 60°C			
Ambient humidity		Operating: 35% to 95%, Storage: 35% to 95%			
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%			
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case			
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		500 m/s <sup>2</sup> , 10 times each in X, Y, and Z directions	1,000 m/s <sup>2</sup> , 10 times each in X, Y and Z directions		
Standards and listings		IP67 under IEC 60529 EMC under EN60947-5-2 UL (CSA) E196555 (See note 2.)			
Connection method		-WP models: Pre-wired Models (4-mm dia. PVC cable with length of 2 m) -M1 models: M12 4-pin Connector Models -M5 models: M8 3-pin Connector Models			
Weight (packed state)	Pre-wired Models	Approx. 65 g	Approx. 85 g	Approx. 160 g	Approx. 280 g
	Connector Models	M12 Connector Models: Approx. 20 g	Approx. 35 g	Approx. 70 g	Approx. 200 g
Material	Case	Stainless steel	Brass-nickel plated		
	Sensing surface	PBT			
	Cable	PVC			
	Clamping nut	Stainless steel	Brass-nickel plated		

**Note 1.** The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object length between sensing objects, and a set distance of half the sensing distance.

**2.** UL (CSA) [E196555]: Use class 2 circuit only.


Engineering Data

Operating Range (Typical)

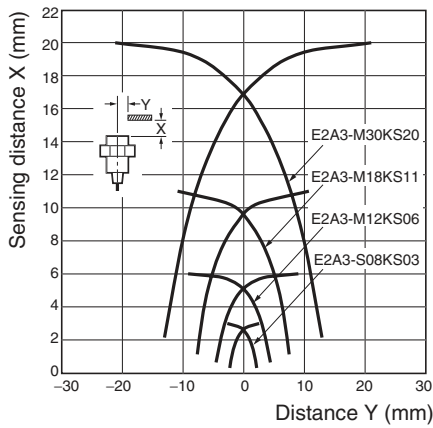


Influence of Sensing Object Size and Materials


E2A3-S08KS03

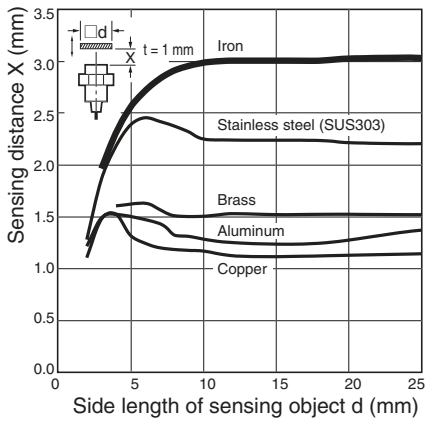


E2A3-M12KS06

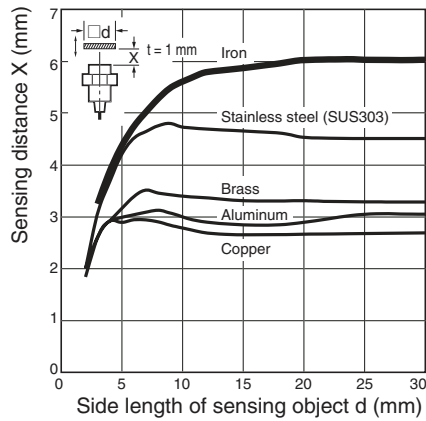

E2A3-M18KS11

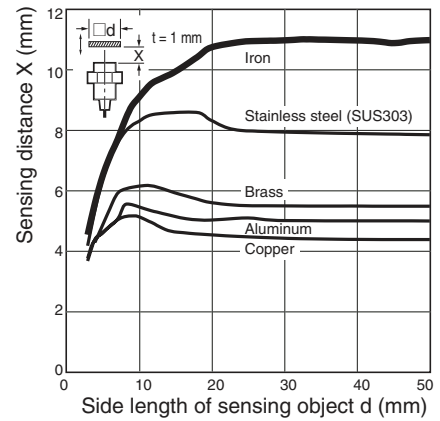

E2A3-M30KS20

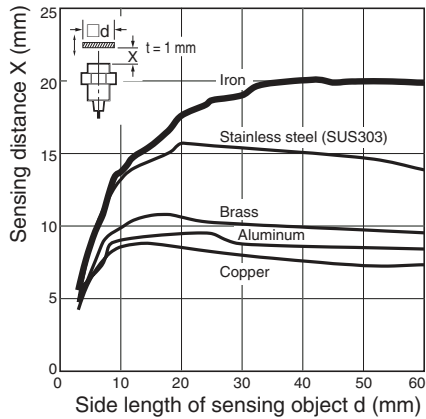

Operation

DC 3-wire Models  
PNP Output

Operation mode	Model	Timing chart	Output circuit
NO	E2A3-□-□- <b>B1</b>		<p><b>Note 1:</b> With M8 Size Models, there is no output reverse polarity protection diode.</p> <p>M12 Connector Pin Arrangement (See note 2.)    M8 Connector (3-pin) Pin Arrangement</p>
NC	E2A3-□-□- <b>B2</b>		<p><b>Note 1:</b> With M8 Size Models, there is no output reverse polarity protection diode.</p> <p>M12 Connector Pin Arrangement (See note 2.)    M8 Connector (3-pin) Pin Arrangement</p> <p><b>Note 2:</b> Terminal 4 of the M12 connector is not used.</p>


DC 3-wire Models  
NPN Output

Operation mode	Model	Timing chart	Output circuit
NO	E2A3-□-□-C1	<p>Non-sensing area      Sensing area      Proximity Sensor</p> <p>Sensing object</p> <p>(%)      100      0</p> <p>Rated sensing distance</p> <p>ON      OFF      Yellow indicator</p> <p>ON      OFF      Control output</p>	<p>Proximity Sensor main circuits</p> <p>(See note 1.)</p> <p>Brown ① +V</p> <p>Black ④ Load</p> <p>Blue ③ 0 V</p> <p><b>Note 1:</b> With M8 Size Models, there is no output reverse polarity protection diode.</p> <p>M12 Connector Pin Arrangement (See note 2.)</p> <p>M8 Connector (3-pin) Pin Arrangement</p> <p><b>Note 2:</b> Terminal 2 of the M12 connector is not used.</p>
NC	E2A3-□-□-C2	<p>Non-sensing area      Sensing area      Proximity Sensor</p> <p>Sensing object</p> <p>(%)      100      0</p> <p>Rated sensing distance</p> <p>ON      OFF      Yellow indicator</p> <p>ON      OFF      Control output</p>	<p>Proximity Sensor main circuits</p> <p>(See note 1.)</p> <p>Brown ① +V</p> <p>Black ② Load</p> <p>Blue ③ 0 V</p> <p>(M8 connector: ④)</p> <p><b>Note 1:</b> With M8 Size Models, there is no output reverse polarity protection diode.</p> <p>M12 Connector Pin Arrangement (See note 2.)</p> <p>M8 Connector (3-pin) Pin Arrangement</p> <p><b>Note 2:</b> Terminal 4 of the M12 connector is not used.</p>


## Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

### Pre-wired Models




E2A3-S08KS03-WP-□□

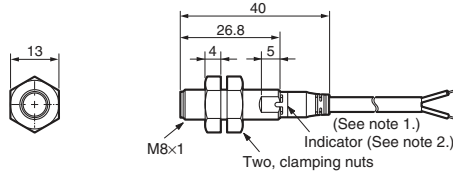


**Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>; Insulator diameter: 1.3 mm), Standard length: 2 m  
**2.** Operation indicator (yellow)

E2A3-M12KS06-WP-□□

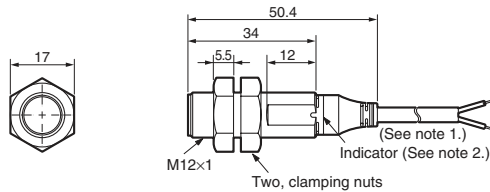


**Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>; Insulator diameter: 1.3 mm), Standard length: 2 m  
**2.** Operation indicator (yellow)

E2A3-M18KS11-WP-□□

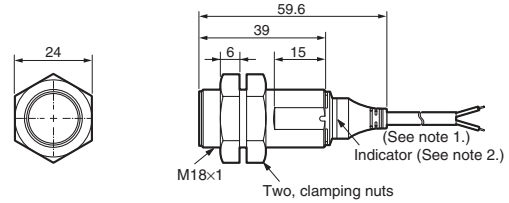


**Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>; Insulator diameter: 1.3 mm), Standard length: 2 m  
**2.** Operation indicator (yellow)

E2A3-M30KS20-WP-□□

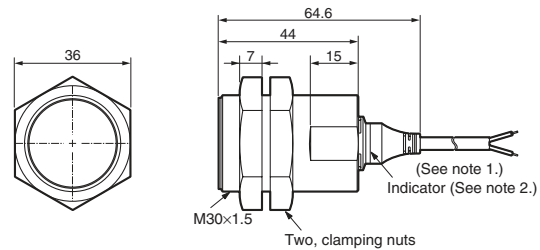


**Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>; Insulator diameter: 1.3 mm), Standard length: 2 m  
**2.** Operation indicator (yellow)

### M12 Connector Models




E2A3-S08KS03-M1-□□

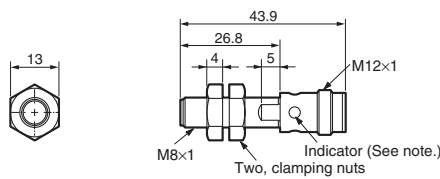


**Note:** Operation indicator (yellow LED, 4×90°)

E2A3-M12KS06-M1-□□

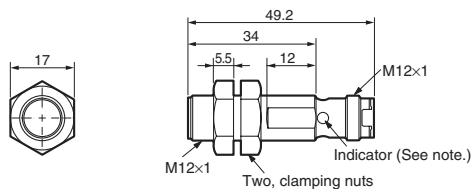


**Note:** Operation indicator (yellow LED, 4×90°)

E2A3-M18KS11-M1-□□

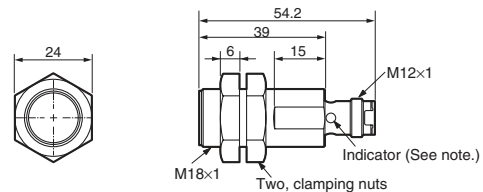


**Note:** Operation indicator (yellow LED, 4×90°)

E2A3-M30KS20-M1-□□

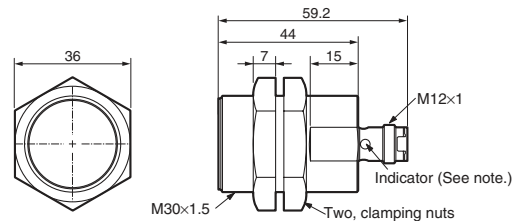


**Note:** Operation indicator (yellow LED, 4×90°)

**M8 Connector Models**



E2A3-S08KS03-M5-□□

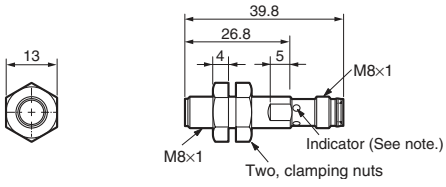

**Note:** Operation indicator (yellow LED, 4×90°)

**Mounting Hole Cutout Dimensions**



External diameter of Proximity Sensor	Dimension F (mm)
<b>M8</b>	8.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$
<b>M12</b>	12.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$
<b>M18</b>	18.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$
<b>M30</b>	30.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$



## Safety Precautions

### Precautions for Safe Use

**⚠ WARNING**

This product is not designed or rated for ensuring safety of persons.  
Do not it for such purposes.



### Power Supply

Do not impose an excessive voltage on the E2A3, otherwise it may be damaged. Do not impose AC current (100 to 240 VAC) on any DC Model, otherwise it may be damaged.

### Load Short-circuit

Do not short-circuit the load, or the E2A3 may be damaged.

The E2A3's short-circuit protection function will be valid if the polarity of the supply voltage is correct and within the rated voltage range.

### Wiring

Be sure to wire the E2A3 and load correctly, otherwise it may be damaged.

### Connection with No Load

Be sure to insert a load when wiring. Make sure to connect a proper load to the E2A3 during operation, otherwise it may damage internal elements.

**Do not expose the product to flammable or explosive gases.**

**Do not disassemble, repair, or modify the product.**

### Precautions for Correct Use


#### Designing

##### Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If separate power supplies are connected to the Proximity Sensor and load, be sure to supply power to the Proximity Sensor before supplying power to the load.

##### Effects of Surrounding Metal

When mounting the E2A3 within a metal panel, ensure that the clearances given in the following tables are maintained.

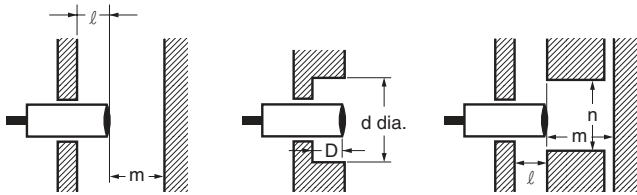


(Unit: mm)

Model	Dimension	M8		M12	
		Ferrous metal	Non-ferrous metal	Ferrous metal	Non-ferrous metal
E2A3 Shielded	l	0.5 (*)	2 (*)	2 (*)	1 (*)
	m	9		18	
	d	24		36	
	D	0.5	2		1
	n	24		36	

(Unit: mm)

Model	Dimension	M18		M30	
		Ferrous metal	Non-ferrous metal	Ferrous metal	Non-ferrous metal
E2A3 Shielded	l	4 (*)	2.5 (*)	6 (*)	4 (*)
	m	33		60	
	d	54		90	
	D	4	2.5	6	4
	n	54		90	

\* Using the nuts provided with the E2A3 allows mounting in the way shown below.



### Power OFF


The Proximity Sensor may output a pulse signal when it is turned OFF. Therefore, it is recommended that the load be turned OFF before turning OFF the Proximity Sensor.

### Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

### Mutual Interference

When installing two or more Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

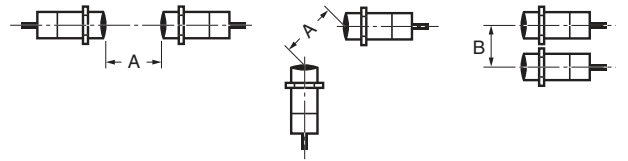

(Unit: mm)

Type	Dimension	M8	M12	M18	M30
E2A3 Shielded	A	25	35	70	110
	B	20	25	45	70

## Wiring

### High-tension Lines

#### Wiring through Metal Conduit:

If there is a power or high-tension line near the cable of the Proximity Sensor, wire the cable through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

### Cable Extension

The standard cable length is less than 200 m.

The tractive force is 50 N.

## Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose its water-resistance.

Do not tighten the nut with excessive force. A washer must be used with the nut.



Type		Torque
M8	Stainless Steel Model	9 N·m
	Brass Model	---
M12		20 N·m
M18		60 N·m
M30		150 N·m

### <SUITABILITY FOR USE>

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of the products in the customer's application or use of the products.

Take all necessary steps to determine the suitability of the product for the systems, machines, and equipment with which it will be used.

### <CHANGE IN SPECIFICATIONS>

Product specifications and accessories may be changed at any time based on improvements and other reasons. Consult with your OMRON representative at any time to confirm actual specifications of purchased product.

## Maintenance and Inspection

Periodically perform the following checks to ensure stable operation of the Proximity Sensor over a long period of time.

1. Check for mounting position, dislocation, looseness, or distortion of the Proximity Sensor and sensing objects.
2. Check for loose wiring and connections, improper contacts, and line breakage.
3. Check for attachment or accumulation of metal powder or dust.
4. Check for abnormal temperature conditions and other environmental conditions.
5. Check for proper lighting of indicators (for models with a set indicator).

Never attempt to disassemble or repair the Sensor.

## Environment

### Water Resistivity

The Proximity Sensors are tested intensively on water resistance, but to ensure maximum performance and life expectancy, avoid immersion in water and provide protection from rain or snow.

### Operating Environment

Store and operate the Proximity Sensor only within the given specifications.

### Inrush Current

A load that has a large inrush current (e.g., a lamp or motor) will damage the Proximity Sensor. Connect the load to the Proximity Sensor through a relay.

# Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
  - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
  - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
  - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
  - d. Delivery and shipping dates are estimates only; and
  - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://oeweb.omron.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

## Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document. (ii) Use in consumer products or any use in significant quantities. (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product. NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

**Complete “Terms and Conditions of Sale” for product purchase and use are on Omron’s website at [www.omron.com/oei](http://www.omron.com/oei) – under the “About Us” tab, in the Legal Matters section.**

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>**OMRON ELECTRONICS LLC**

One Commerce Drive  
Schaumburg, IL 60173

**847-843-7900**

For US technical support or other inquiries:

**800-556-6766****OMRON CANADA, INC.**

885 Milner Avenue  
Toronto, Ontario M1B 5V8

**416-286-6465****OMRON ON-LINE**

Global - <http://www.omron.com>  
USA - <http://www.omron.com/oei>  
Canada - <http://www.omron.ca>