
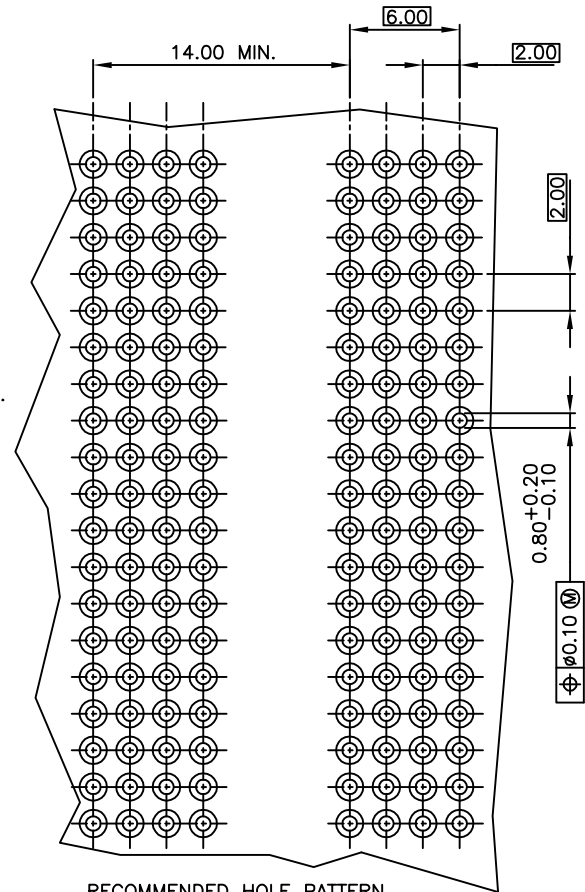
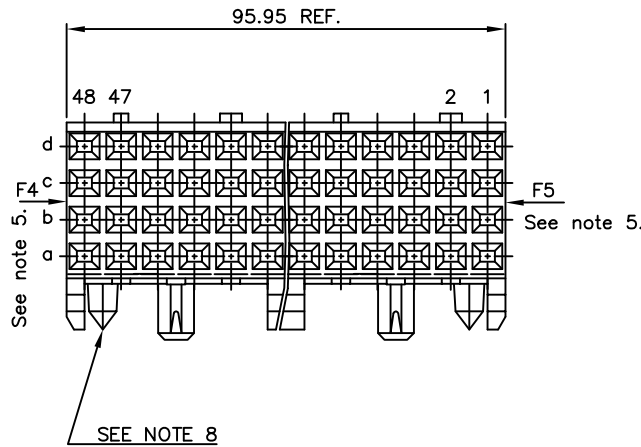



PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88957-X01	5.00 REF.
88957-X11	3.35 REF.
88957-X01LF	5.00 REF.
88957-X11LF	3.35 REF.

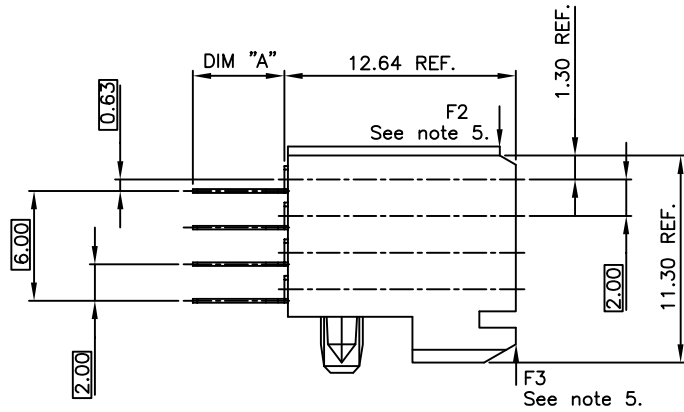

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

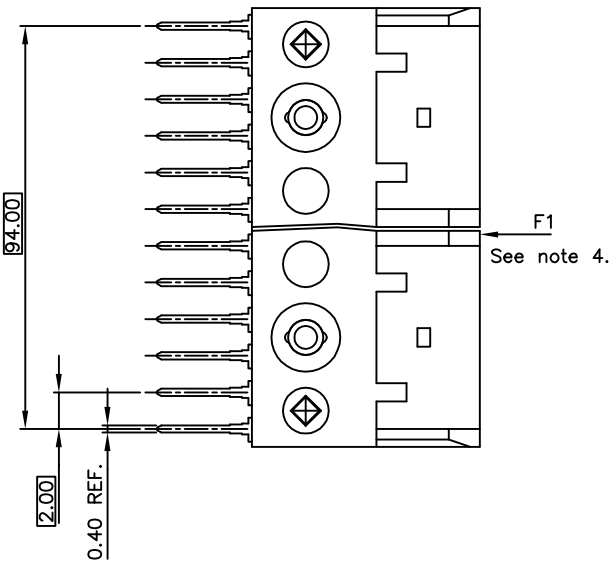

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION ( E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 100 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	 www.fcconnect.com	
ltr	ecn no	dr	date	projection		title
H	D007-0170	Cent	05/22/07	linear	STR FEMALE STB	
J	D008-0171	TER	8/28/08		SIGNAL 96MM	
K	D009-0088	Cent	06/06/08	angles		
-		dr	A van Zanten	910809	product family	
E	H40355	DOB	940527	engr H.Bouwknegt	931122	code
F	V91450	DOB	990827	chr P.Schalk	910809	size
G	D005-048	CLU	051115	app H van Woensel	911227	dwg no
sheet	revision	K				1 of 1
index	sheet	1				213