


Model 73103 Maxigrabber® with Reinforced Insulation

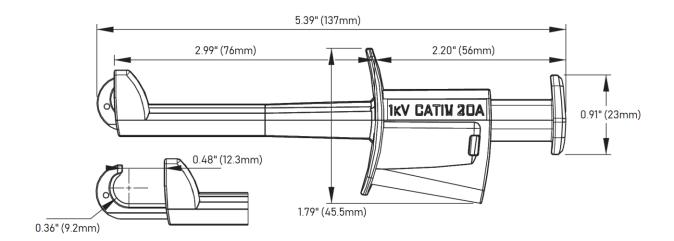

Features

- Reinforced insulation for increased electrical protection
- Designed for connections to high current conductors
- 12mm hook opening
- Ideal for electronic, electrical and industrial applications where access to hard-to-reach high voltage test points is a requirement
- Safety 4mm banana jack mates with Pomona's 5907A, 5908A, and 5909A test lead sets for interfacing with Digital Multi-Meters

Materials

Conductor: Nickel-plated brass, steel, and brass

Insulation: Polypropylene and Nylon 6

Ratings

Voltage: CAT II 1000V / CAT III 1000V / CAT IV 1000V

Current: 20 amperes

Operating Temperature: +5°C to +45°C (+41°F to 113°F)

Ordering Information

Model: 73103-*color Color*: 0=Black, 2=Red

Maxigrabber® with Reinforced Insulation



USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.