






DESCRIPTION: RJ-45 TO 25-POSITION MALE D-SUB – PLASTIC & METALIZED PLASTIC

**MATERIAL:**

HOOD: ABS UL 94V-HB

**RJADK25P70808Y1**


SERIES \_\_\_\_\_  
 POSITIONS 25  
 GENDER P = MALE  
 D-SUB TERMINALS 7 = CRIMP & POKE (CONTACTS PRE-CRIMPED)  
 MODULAR POSITIONS 08  
 MODULAR POSITIONS LOADED 08  
 COLOR 1 = BLACK  
 2 = METALIZED (SHIELD RATING: 60dB)  
 3 = GRAY  
 D-SUB CONTACT PLATING 1 = GOLD FLASH  
 3 = 10 $\mu$ " DSUB CONTACT // 50 $\mu$ " RJ-45 CONTACT

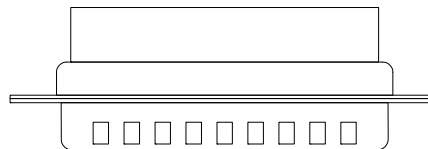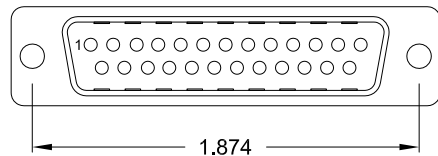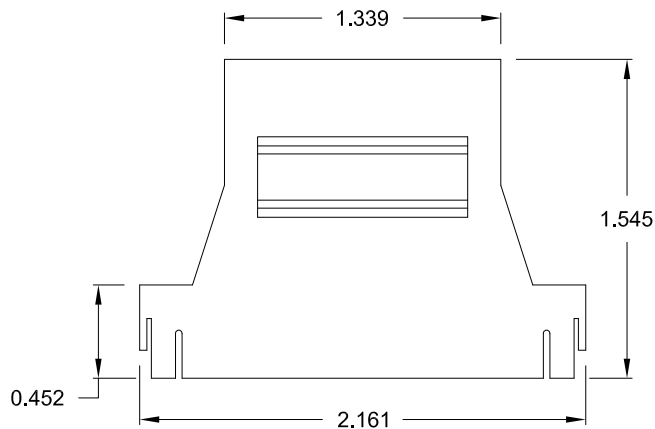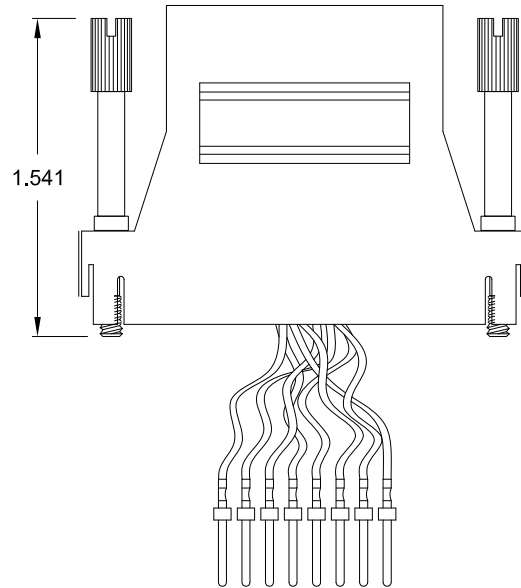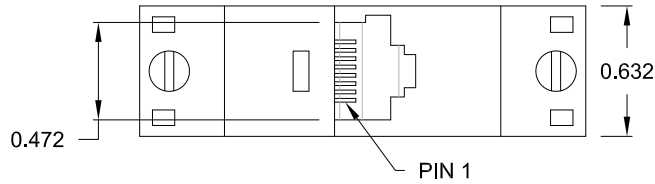

**RJ45**

1. BLUE
2. ORANGE
3. BLACK
4. RED
5. GREEN
6. YELLOW
7. BROWN
8. WHITE

**DB-25M**

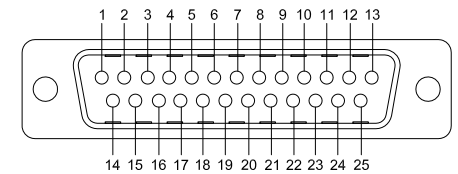

FRONT VIEW

**RoHS COMPLIANT**

UNITS = inch

**DO NOT SCALE FROM DRAWING**



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**C. SMITH**  
 DATE:  
**05/14/2007**

**NorComp**

|               |            |                        |          |
|---------------|------------|------------------------|----------|
| SCALE:<br>NTS | SHEET<br>1 | OF<br>1                | REV<br>2 |
| DWG NO.       |            | <b>RJADK25P70808Y1</b> |          |