


## Foam-Backed Blue Sealant LNCL-GTS-1030-1X25 FT

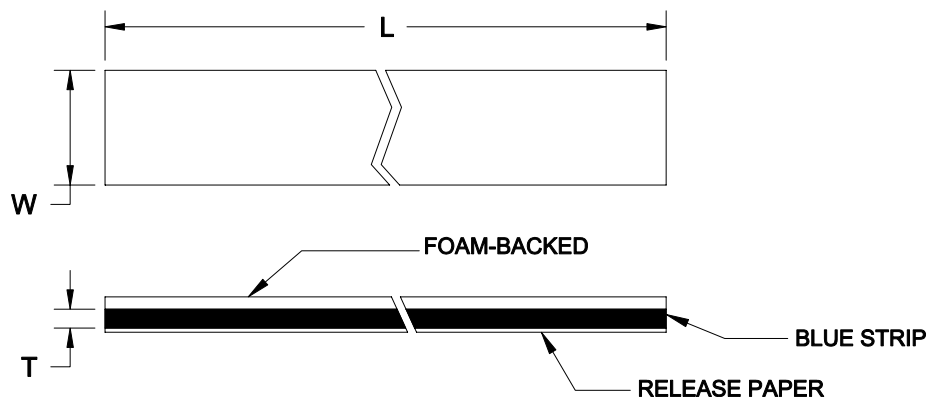

### Table of Dimensions:

PART NUMBER	L (Min. Exp.)	T Ref.	W $\pm .125 [3.2 \text{ mm}]$
LNCL-GTS-1030-1X25FT	25 ft. [7.8 m]	0.030 [0.75 mm]	1.00 [25.4 mm]

### Material:

Open-cell-foam-backed (one side tacky) for handling ability of top surface.  
 Blue strip: pre-cured silicone gel.  
 Release paper: 5-mil thickness paper.

### Requirements:

Except as specified above, the product will meet the requirements of Specification RT-1065.  
 Acceptance tests shall consist of measuring roll width and thickness.

### Notes:

Open-cell foam is 0.030" thick. When compressed to less than the nominal gel thickness, gel penetrates through the open-cell foam to seal substrates on both sides.

### Specification Control Drawing

<b>tyco</b> Electronics		Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		<b>Raychem</b>		Title: <b>Foam-Backed Blue Sealant</b>	
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application				Document No. <b>LNCL-GTS-1030-1X25FT</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS				Rev.: B		Rev. Date: July 20, 2004	
DRAWN BY: U. NGUYEN	CAGE CODE: 06090	Org. Date: Dec. 4, 2003	File name: Inclgts10301x25ft	SCALE: None	SIZE: A	SHEET: 1 of 1	

©2004 Tyco Electronics Corporation. All rights reserved

If this document is printed it becomes uncontrolled. Check for the latest revision.