


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| LOC | DIST | P | F | ZONE | LTR | DESCRIPTION | DATE | APPD |
|-----|------|---|---|------|-----|--------------------------|-----------|------|
| FT | 22 | | | | E | REDRAWN PER 0010-0067-94 | 2/18/94 | HR |
| | | | | | F | REV PER EC 0320-349-97 | 27 OCT 97 | NS |

1. RETAINING SPRINGS TO BE USED ON OPPOSITE SIDE OF CARD SLOT FOR SINGLE SIDED PC BOARD APPLICATIONS. USE 1 RETAINING SPRING PER 6 CRIMP STYLE CONTACTS, FOR EXAMPLE: 36 POSN-6 SPRINGS; 30 POSN-5 SPRINGS; 24 POSN-4 SPRINGS; 18 POSN-3 SPRINGS ETC...

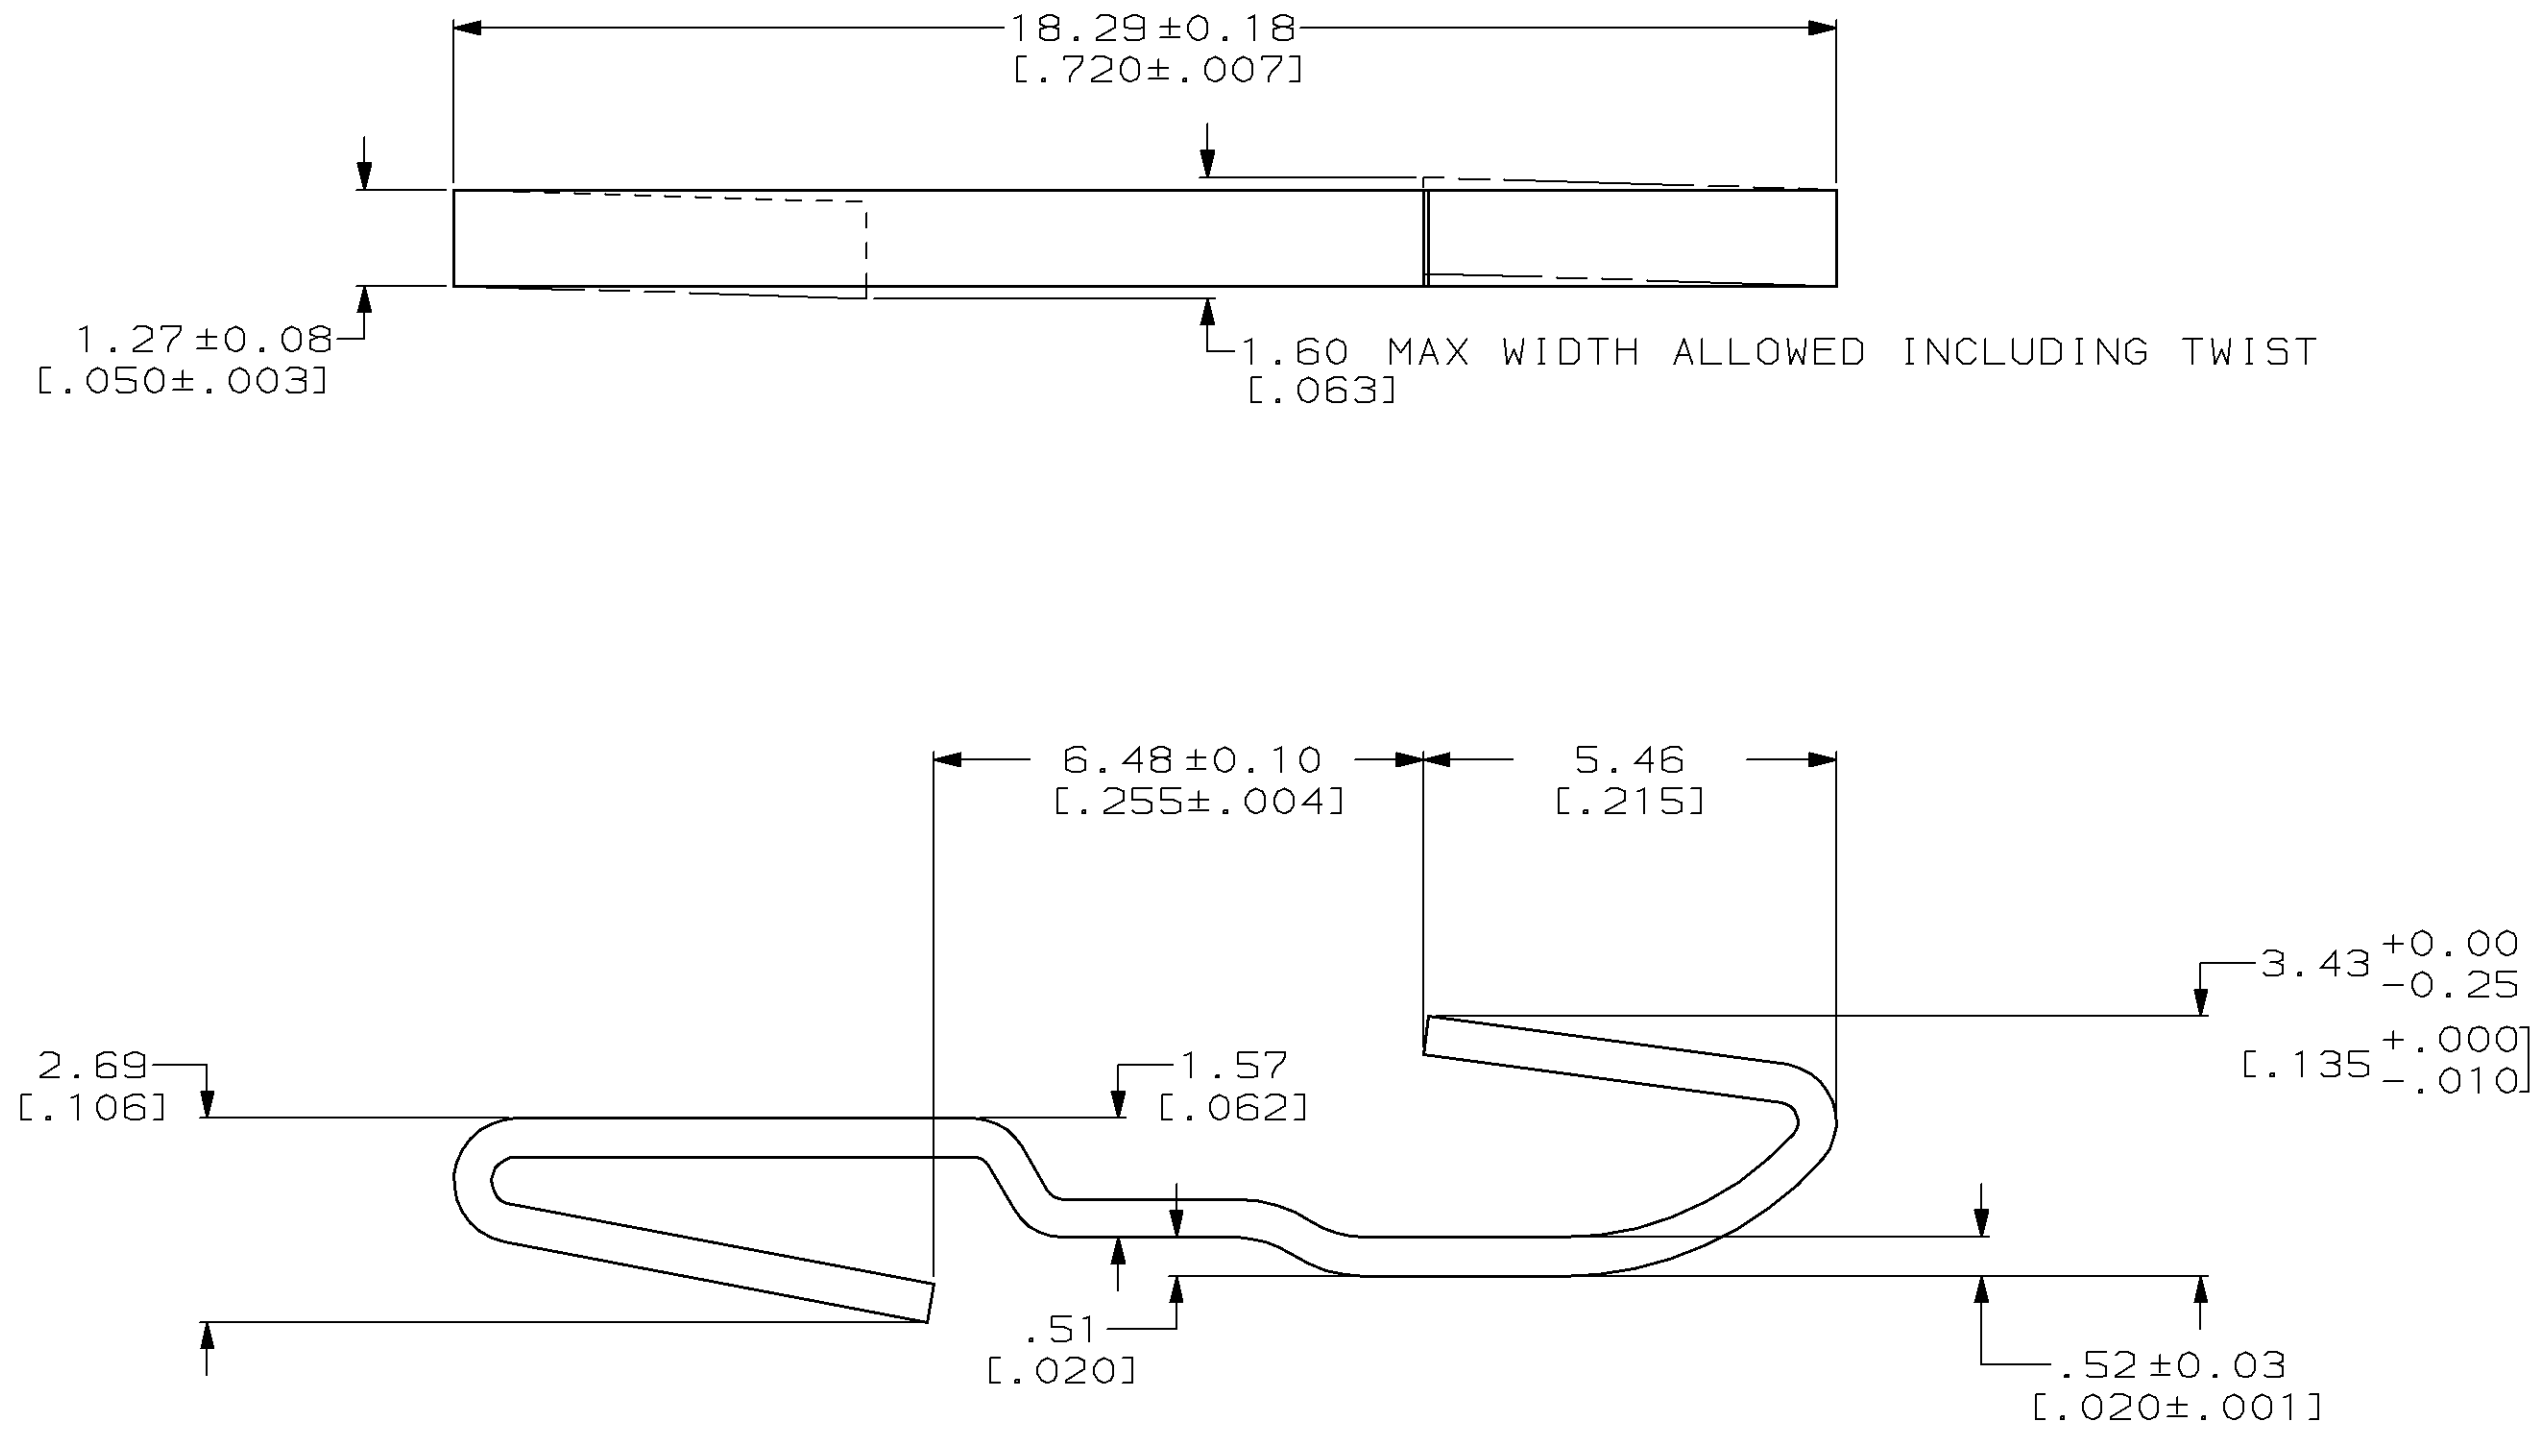

| FINISH | PART NO |
|----------------------------------|----------|
| .000050 NICKEL ALL OVER | 583691-4 |
| .000010 GOLD OVER .000050 NICKEL | 583691-3 |
| UNPLATED | 583691-2 |

| | | | | |
|---|--------------------------|---|--------------|------------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± - | DR 8-2-93 A. STAUB BG | AMP Incorporated Harrisburg, PA 17105-3608 | | |
| | CHK 2/18/94 H ROSE | | | NAME |
| MATERIAL STAINLESS STEEL | APPD 2/18/94 H ROSE | SPRING, RETAINER | | |
| FINISH - | APPD 2/18/94 M THUMMA | | | |
| | PRODUCT SPEC - | SIZE | CAGE CODE | DRAWING NO |
| | APPLICATION SPEC - | ③ | 00779 | ③=583691 |
| | WEIGHT - | SCALE 10:1 | SHEET 1 OF 1 | |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.