

**MICRO SWITCH**  
 FREEPORT ILLINOIS U.S.A.  
 A DIVISION OF HONEYWELL  
 FED MFG CODE 91929


**SWITCH - TOGGLE  
 FLUSH KEY**

CATALOG LISTING  
**2TP1-70**


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**CIRCUIT DIAGRAM**


LUG SIDE  
 (MOMENTARY POSITION)



CENTER  
 (MAINTAINED POSITION)



OPPOSITE LUG  
 (MOMENTARY POSITION)




**ELECTRICAL DATA**

L192 10A 125, 250, 277 VAC  
 1/4HP 125 VAC,  
 1/2HP 250, 277 VAC  
 3A 125 VAC "L"



FORMTEK FO-52854-C  
 DRAWN JAP 10 JUN 82  
 CHECK CEB 14 JUNE 82  
 CHECK KVC 11 AUG 82  
 REVISIONS:  
 A C050791 J A P 10 JUN 82  
 B C056164 J A P 6 MAR 85  
 C C057496 C J H 24 SEP 85  
 D C058717-B W J K 22 OCT 86  
 E C077697 W J H 10 NOV 86  
 F C094412 T S H 15 JUN 94  
 D L M 13 OCT 99  
 2TP1-70 PAGE 1 OF 1  
 M DRAWING NUMBER  
 ISSUE 13  
 REPLACES SR13112  
 RELEASE NO

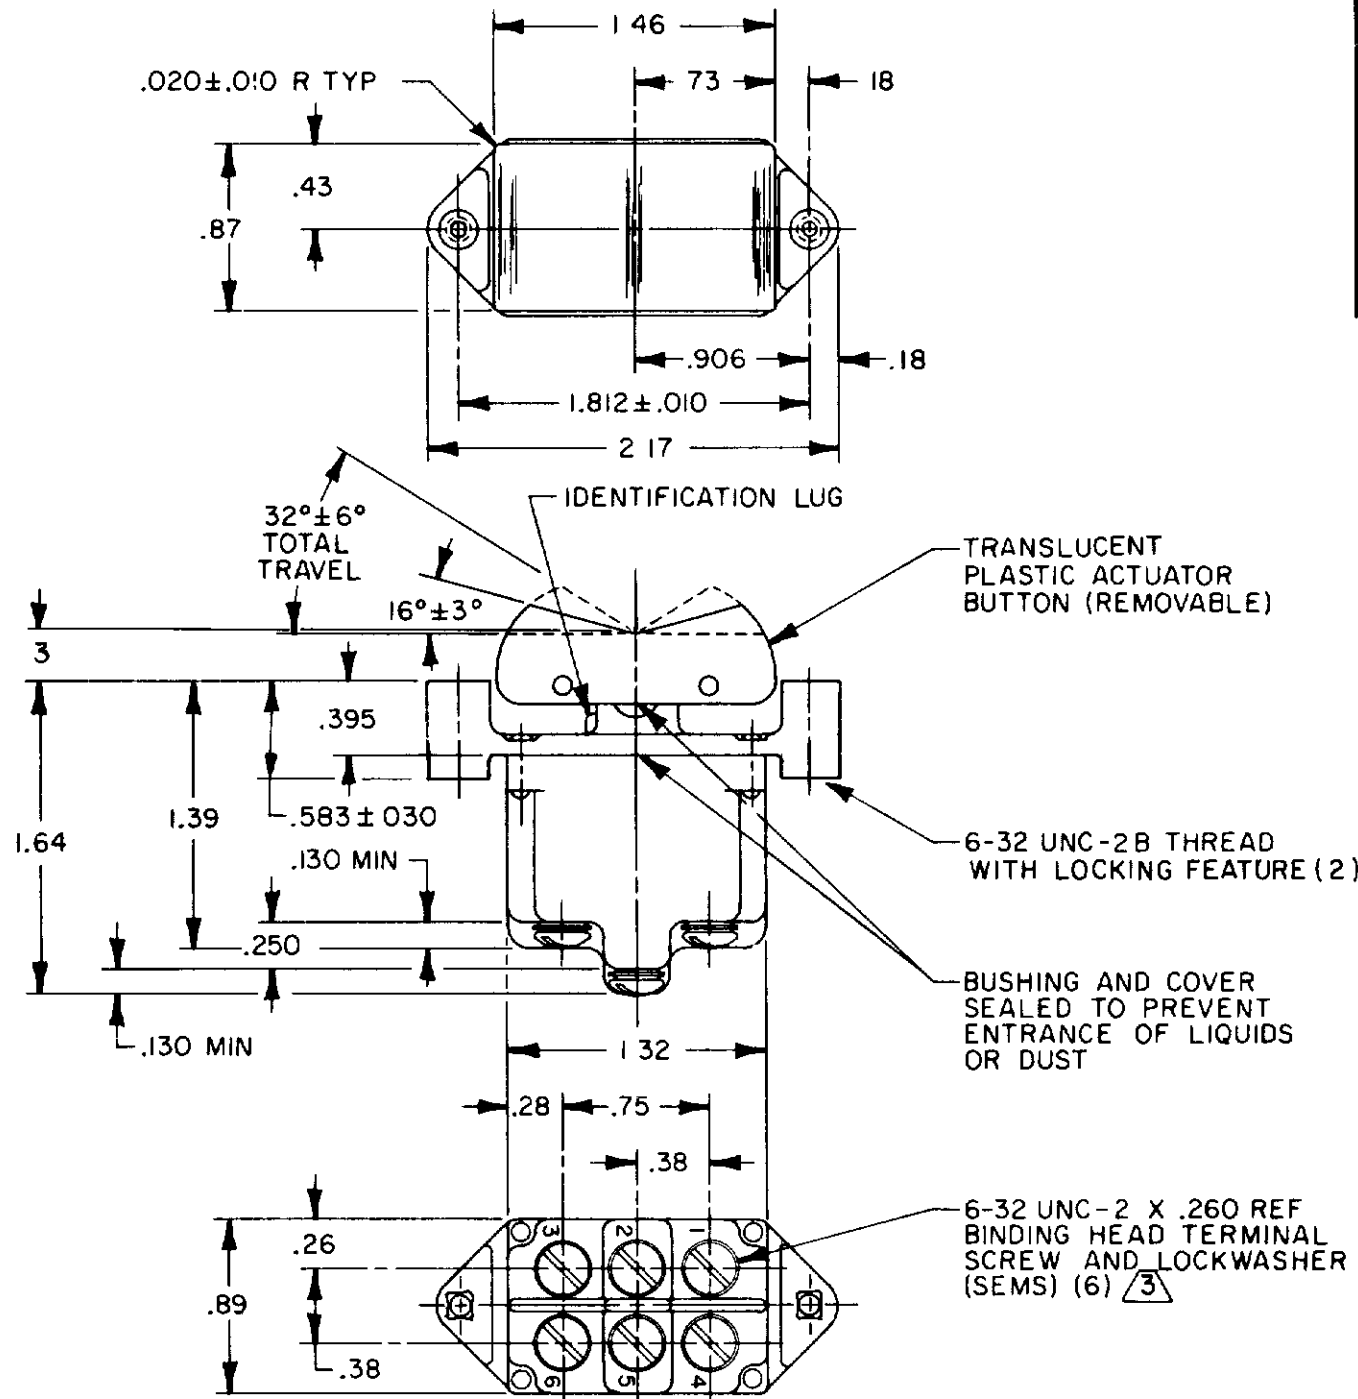

**NOTES**

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F @ FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - SCREWS FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED TOLERANCES ARE ±

NO PLACES	DM	TOL	DM	TOL
	mm	mm/in	in	mm/in
ONE PLACE	X	1/64	X X	0.010
TWO PLACES	X XX	0.0010	X XX	0.00010
THREE PLACES	X XXX	0.00010	X XXX	0.000010

DESIGN UNITS  METRIC  US CUSTOMARY

WEIGHT .14 LB EST