


**Data sheet | Item number: 267-177**

Female connector; with direct ground contact; with snap-in mounting feet; 7-pole; 1,00 mm<sup>2</sup>; white

[www.wago.com/267-177](http://www.wago.com/267-177)



Color:

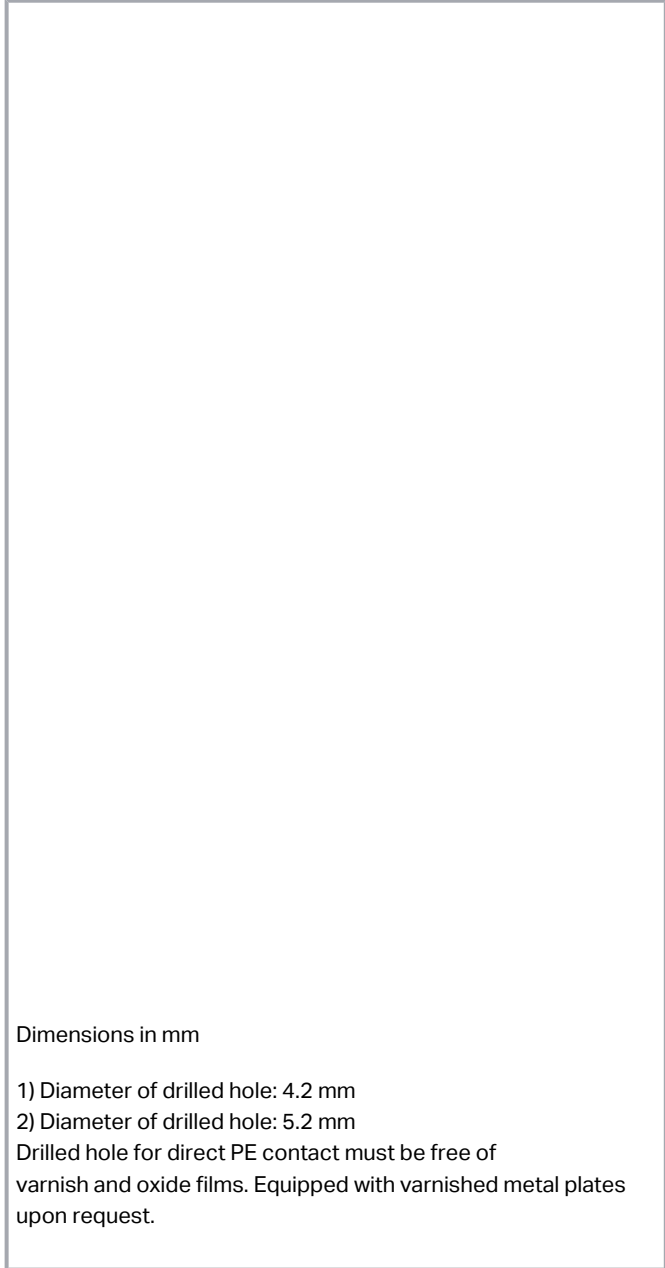

Dimensions in mm

- 1) Diameter of drilled hole: 4.2 mm
- 2) Diameter of drilled hole: 5.2 mm

Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Item description

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

## Data

### Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	500 V
Rated impulse voltage (III/2)	4 kV
Rated current	6 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

### Connection data

Number of connection types	1
----------------------------	---

#### Connection 1

Connection technology	PUSH WIRE®
Strip length	8 mm / 0.31 inches
Pole number	7

### Physical data

Width	26 mm / 1.024 inches
Height from the surface	34 mm / 1.339 inches
Depth	42 mm / 1.654 inches

### Material Data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I

Subject to changes. Please also observe the further product documentation!



Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact plating	Tin
Fire load	0.591 MJ
Weight	13 g

### Environmental requirements

Temperature stability	105 °C
-----------------------	--------

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 pcs
Packaging type	bag
Country of origin	PL
GTIN	4044918499835
Customs tariff number	85366990990

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>CCA</b> DEKRA Certification B.V.	EN 61984	NL-47718
	<b>KEMA/KEUR</b> DEKRA Certification B.V.	EN 61984	71- 100641
	<b>UL</b> UL International Germany GmbH	UL 1977	E45171
	<b>VDE</b>	EN 61984	40032309

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



VDE Prüf- und Zertifizierungsinstitut

---

## Downloads

### Documentation

#### Additional Information

2019 年4月3日

pdf  
2.0 MB

[Download](#)

---

## CAD/CAE-Data

### CAD data

2D/3D Models 267-177

[URL](#)

[Download](#)

---

### CAE data

ZUKEN Portal 267-177

[URL](#)

[Download](#)

---

EPLAN Data Portal 267-177

[URL](#)

[Download](#)

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 267-177

[URL](#)

[Download](#)

Female connector; with direct ground contact; with snap-in mounting feet; 7-pole;  
1,00 mm<sup>2</sup>; white

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.