



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-5 @20°C	0.285 ohms ±20%
D.C. RESISTANCE	8-7 @20°C	0.320 ohms ±20%
D.C. RESISTANCE	9-10 @20°C	0.320 ohms ±20%
INDUCTANCE	2-5 100kHz, 100mVAC, Ls	1.40mH typ., 0.90mH min.
LEAKAGE INDUCTANCE	2-5 tie(7+8), 100kHz, 100mVAC, Ls	350nH typ., 700nH max.
LEAKAGE INDUCTANCE	2-5 tie(9+10), 100kHz, 100mVAC, Ls	350nH typ., 700nH max.
INTERWINDING CAPACITANCE	2-8 10kHz, 10mVAC, Cs	6.0pF typ., 12.0pF max.
INTERWINDING CAPACITANCE	2-9 10kHz, 10mVAC, Cs	6.0pF typ., 12.0pF max.
INTERWINDING CAPACITANCE	2-10 tie(8+9), 10kHz, 10mVAC, Cs	6.0pF typ., 12.0pF max.
DIELECTRIC	2-10 tie(8+9), 4500VAC, 2 seconds	4500VAC, 1 minute
DIELECTRIC	8-9 1000VAC, 2 seconds	1000VAC, 1 minute
URNS RATIO	(8-7):(2-5)	1.07:1, ±2%
URNS RATIO	(9-10):(2-5)	1.07:1, ±2%

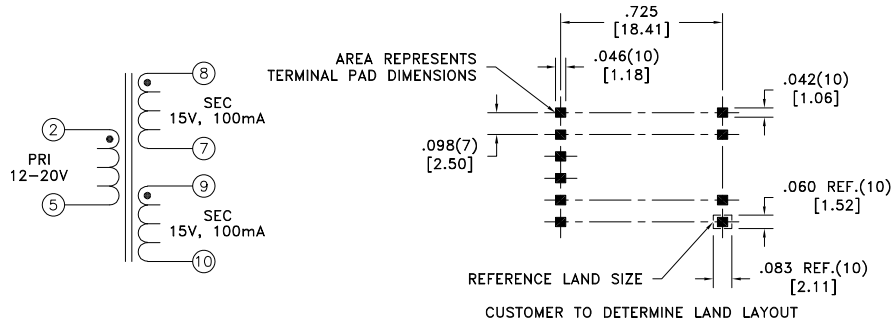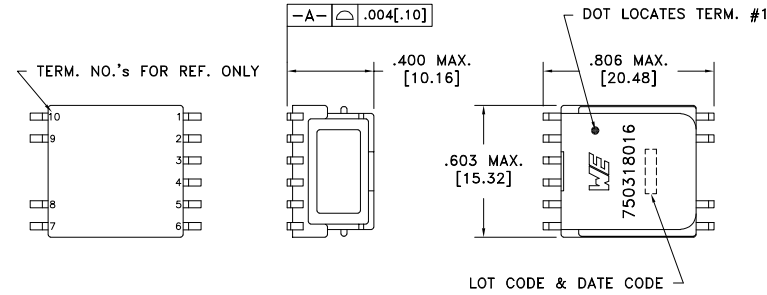

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety standard undefined.

VOLTAGE-TIME: 50Vus min. based on unipolar waveform.

Designed to meet 10kV (1.2 x 50usec, 5± repetitions) surge test between PRI and SEC.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-1195 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [ .13 ] Footprint: ±.005 [ .13 ]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750318016</b>
6B	3/21			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750318016	
6A	11/19	SEE REVISION SHEET FOR REVISION LEVEL				SPECIFICATION SHEET 1 OF 1