

# FFA.00.250.NTAC17Z

## **SUMMARY**

# Wires

Coax 1



Image is for illustrative purpose only

Series 00

Termination type Male solder

IP rating 50

AWG wire size 0.00 - 0.00

Cable Ø 1.30 - 1.70 mm

Status active

Matching parts ERA.00.250.NTL

### **Download**

Request a quote

Catalog

## **TECHNICAL DETAILS**

### **Mechanics**

Shell Style/Model FFA\*: Straight plug with cable collet and nut for fitting a bend relief

Keying Circular, male

Housing Material Brass (nickel plated [SAE AMS QQ N 290]) shell, collet nut, latch sleeve and mid pieces

**Variant** Z: Nut for fitting a bend relief

Weight 3.86 g

### **Performance**

**Configuration** 00.250 : 1 Coax (50 Ohm)

Insulator T: PTFE Rated Current 4 Amps

## **Specifications**

Contact Type: Coaxial 50 Ohm (Solder)

Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.6 mm (0.024in) Test voltage: 2.1 kV (rms)

R (max): 6.1 mOhm

Vtest: 2100 V (AC), 3000 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Impedance: 50 Ohm VSWR: 1.09 + 0.11 \* f/GHz


## **Others**

Endurance (Shell): 5000 mating cycles

F ret (min): 100 N

Salt Spray Corrosion: >144 hr

## **DRAWINGS**

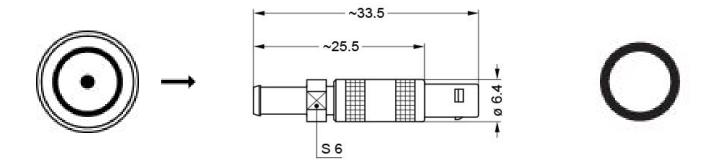

#### **Dimensions**

	А	L	М
mm.	6.4	33.5	25.5
in.	0,25	1,32	1,00

# **RECOMMENDED BY LEMO**

### **Tools**

Spanner wrench: DCD.00.ZZZ.PA060

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

