
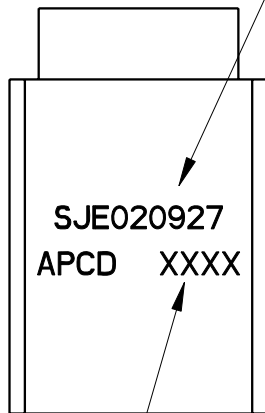
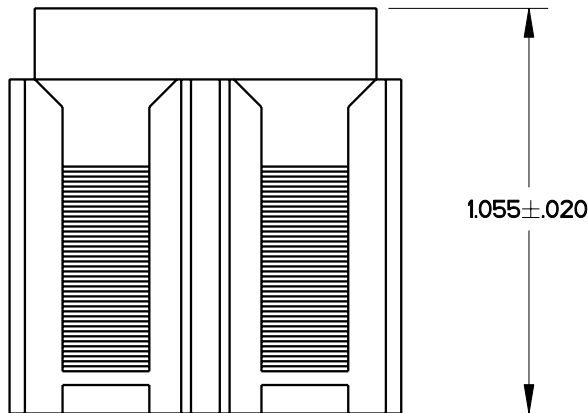


REV	ECN	APP'D
-	5823	

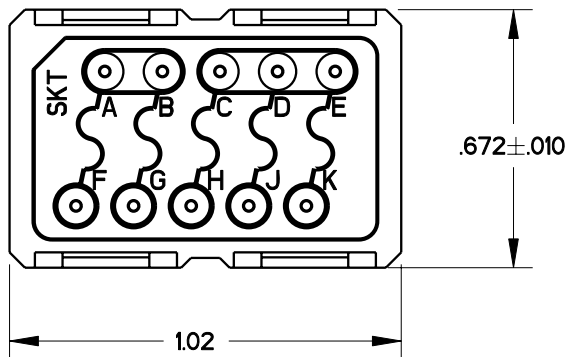

PART MARKING
COLOR: WHITE
.06 HIGH

NOTES:

1. MATERIALS:
 BODY: POLYETHERIMIDE PER MIL-P-46184
 GROMMET: SILICONE BLEND ELASTOMER
 FUSE: 1 AMP, 125 V, QTY 5.
 INTERNAL PIN CONTACTS: COPPER ALLOY, HARD GOLD PLATE PER MIL-G-45204.
2. PERFORMANCE SPECIFICATIONS PER MIL-T-81714 (SUBJECT TO THE LIMITATIONS OF THE FUSE SPEC.)
 OPERATING TEMP: -65°C TO 200°C
 INSULATION RESISTANCE: 5000 MEGOHMS AT 25°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500Vrms AT SEA LEVEL
 200Vrms AT 100,000 FT ALTITUDE
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS
 VIBRATION AND SHOCK: MIL-T-81714, PARA. 3.5.8, 3.5.9
3. MODULE ACCEPTS M39029/22-192 SOCKET CONTACTS (NOT INCLUDED.)
4. MODULE OCCUPIES 2 POSITIONS WHEN INSTALLED IN M81714/67 MOUNTING RAIL.

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	Amphenol PCD SPECIFICATION DRAWING		TITLE SJE SERIES ELECTRONIC MODULE QTY 5, 1 AMP FUSES		
			ENGR D. LANG 2/1/06		SIZE A	DWG NO. SJE020927	REV -
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD PEABODY, MA, USA		CHKD	APPD	CODE: 58982	SCALE: NONE	SHEET 1 OF 1