


COIL: @ +25 °C
 RESISTANCE 1030 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 11.4 VDC
 MUST RELEASE 1.1 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

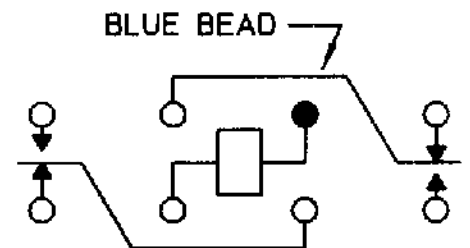

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 3/9/95 CK. *3/9/95 RB*

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C.I.I. STD.
 CUST. NO. _____

TYPE 'HMS' RELAY

HMS1201S004