



specifications

Consumption	Lumen Output	Efficacy	Voltage	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
15W	1,875	62 LM/W	100-277 V ⚡	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	IP40	83	<20%	21.61" x 1.61" x 1.41"

select your lamp

Part Number	Color Temp
GI-2DT5D-W30-BF	3000K
GI-2DT5-D30-BC	4000K
GI-2DT5-C30-BC	5000K



add your accessories\*

Accessories Part Number	Description
GI-ACC-3PC	3' power cable with plug
GI-ACC-6PC	6' power cable with plug
GI-ACC-15CC	1.5' linking cable
GI-ACC-6CC	6' linking cable
GI-ACC-SUS-DT5	suspension kit
GI-ACC-MC-T8	magnetic clip

\*optional

other


Warranty	Weight	Case QTY
6 years	0.66 lbs	20 pcs




Features

- > Linkable up to 200W.
- > Aluminum housing allows for excellent heat dissipation.
- > 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations.
- > Patent Male-female linkable design.

Light Distribution Curve

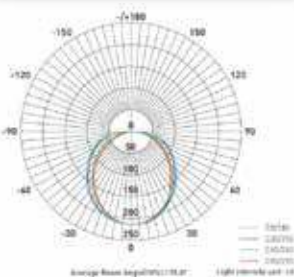

Lux vs Distance

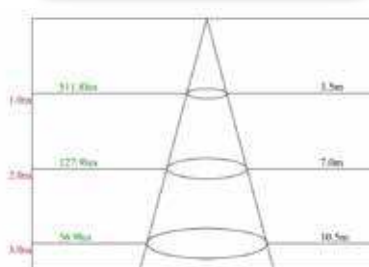

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

