

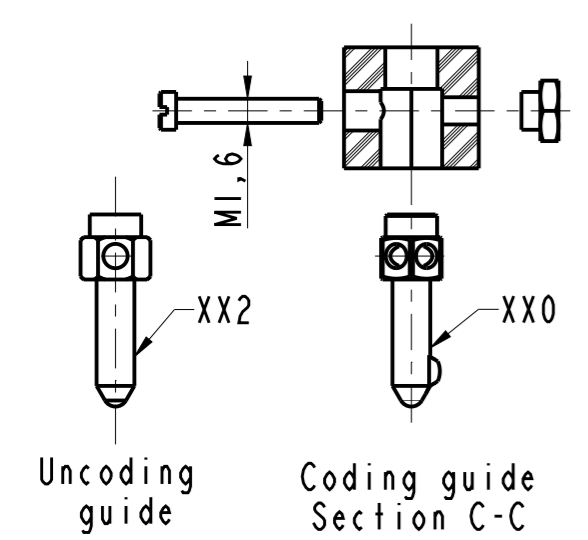
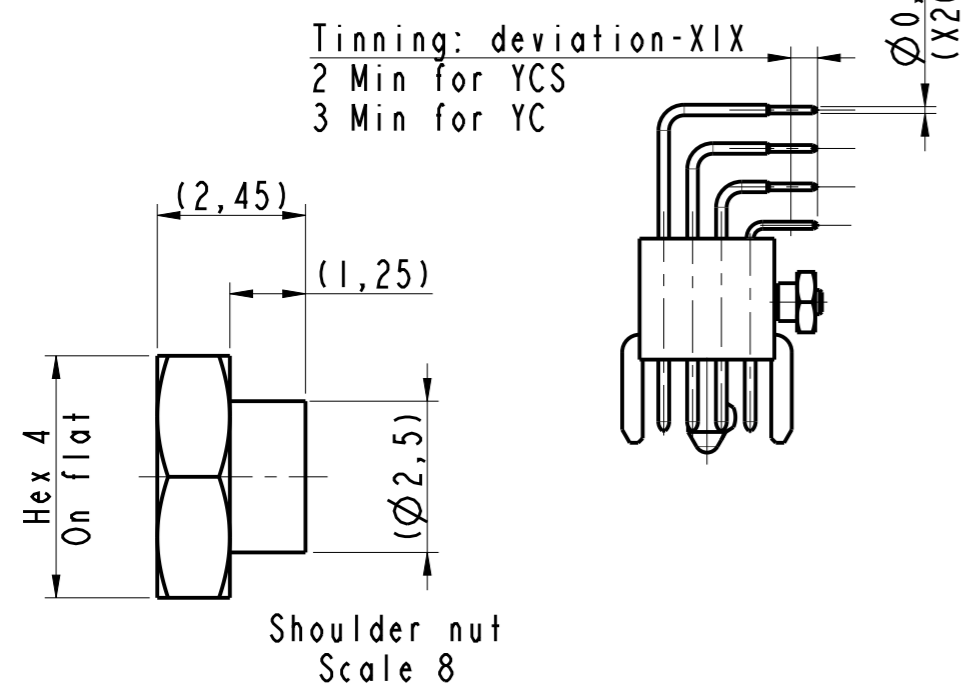
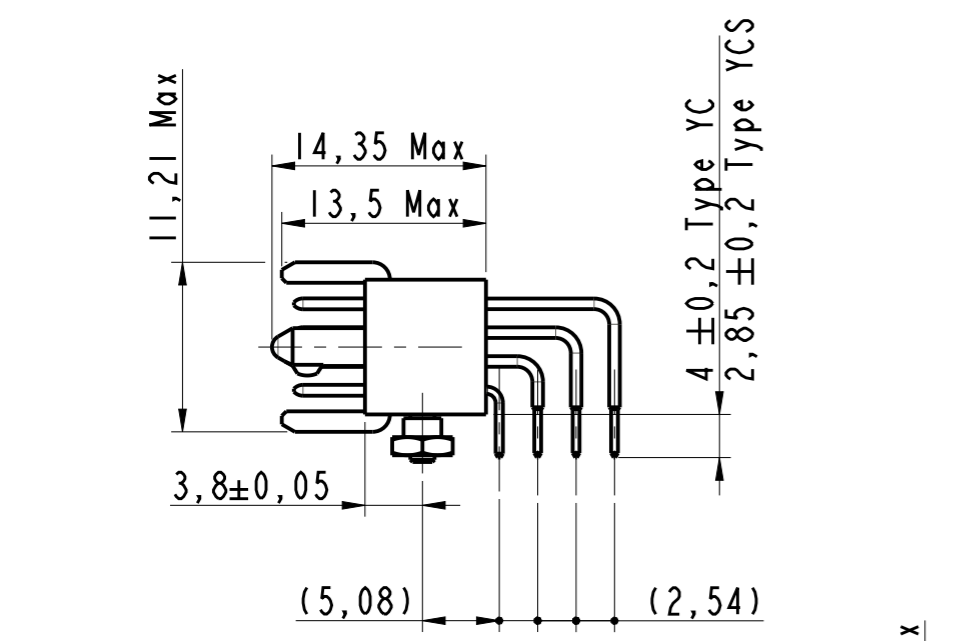


IN THE CONSTANT PURPOSE OF IMPROVING ITS PRODUCTS, Amphenol Socapex RESERVES THE RIGHT TO MODIFY ANY DIMENSION OR CHARACTERISTICS.  
FM.NIPD.0036.THYEZ.PUNE rev C

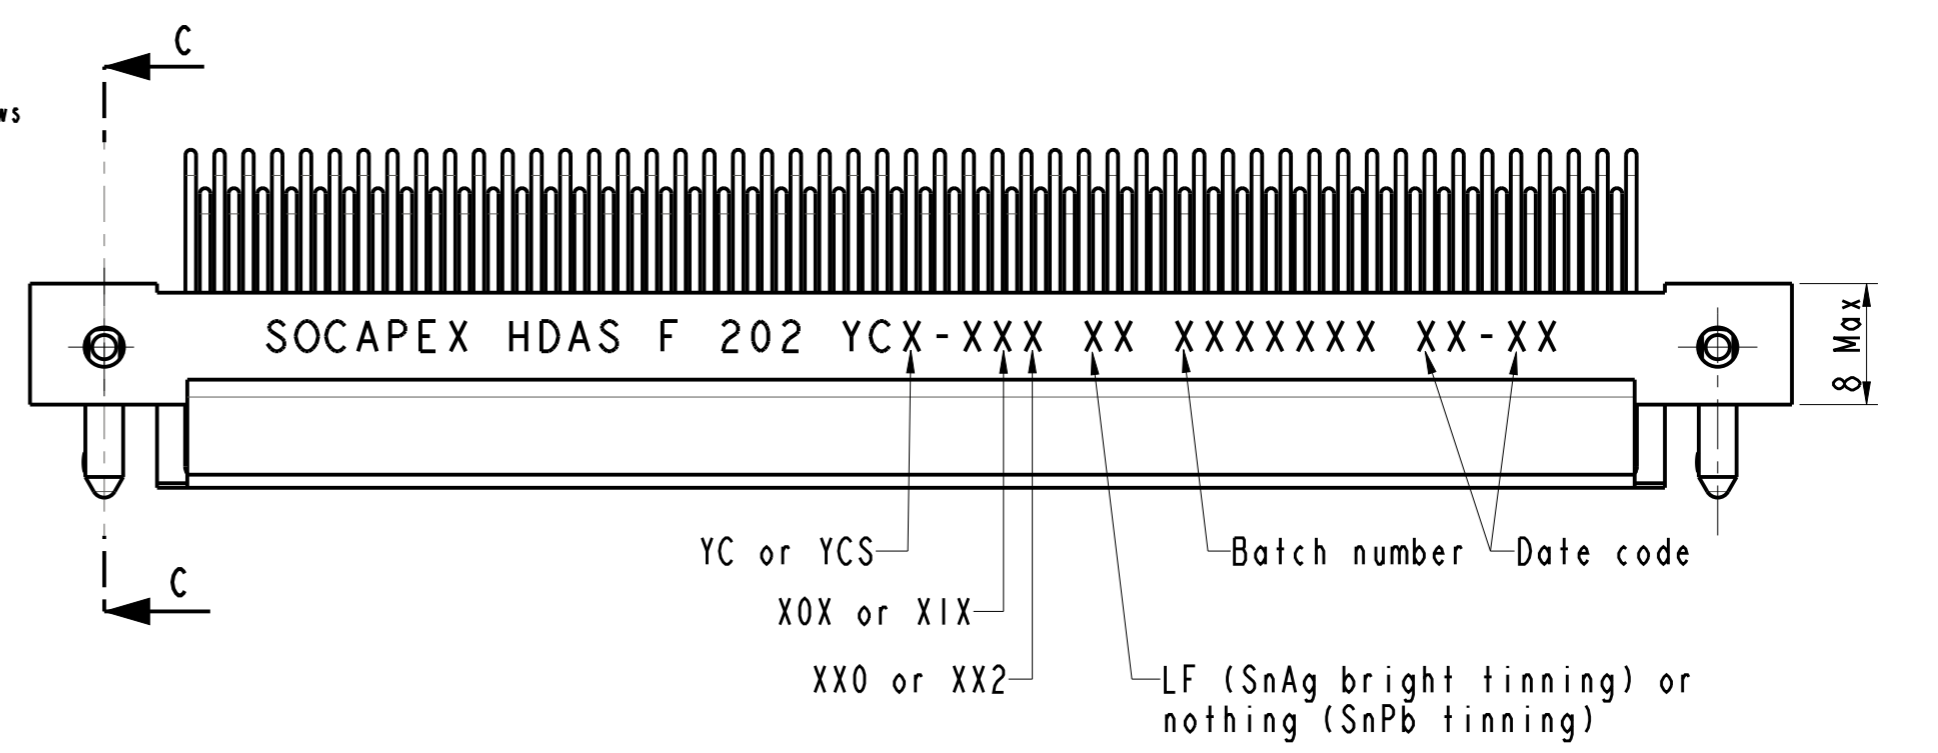

Notes:




- Part : HDAS F 202 YCX-XXX XX.
- External dimensions for a male plug with 202 signal contacts type YCX.
- Connector delivered with fittings not assembled, coupling torque : 0,15 Nm
- Standard OXX : Nickel plated over brass fittings.  
Deviation IXX : Passivated stainless steel fittings.
- Standard XOX : Contacts gold plated (RoHS)  
Deviation XIX : Contacts tail Hot dip tinned  
SnPb (non RoHS) or SnAg (RoHS)

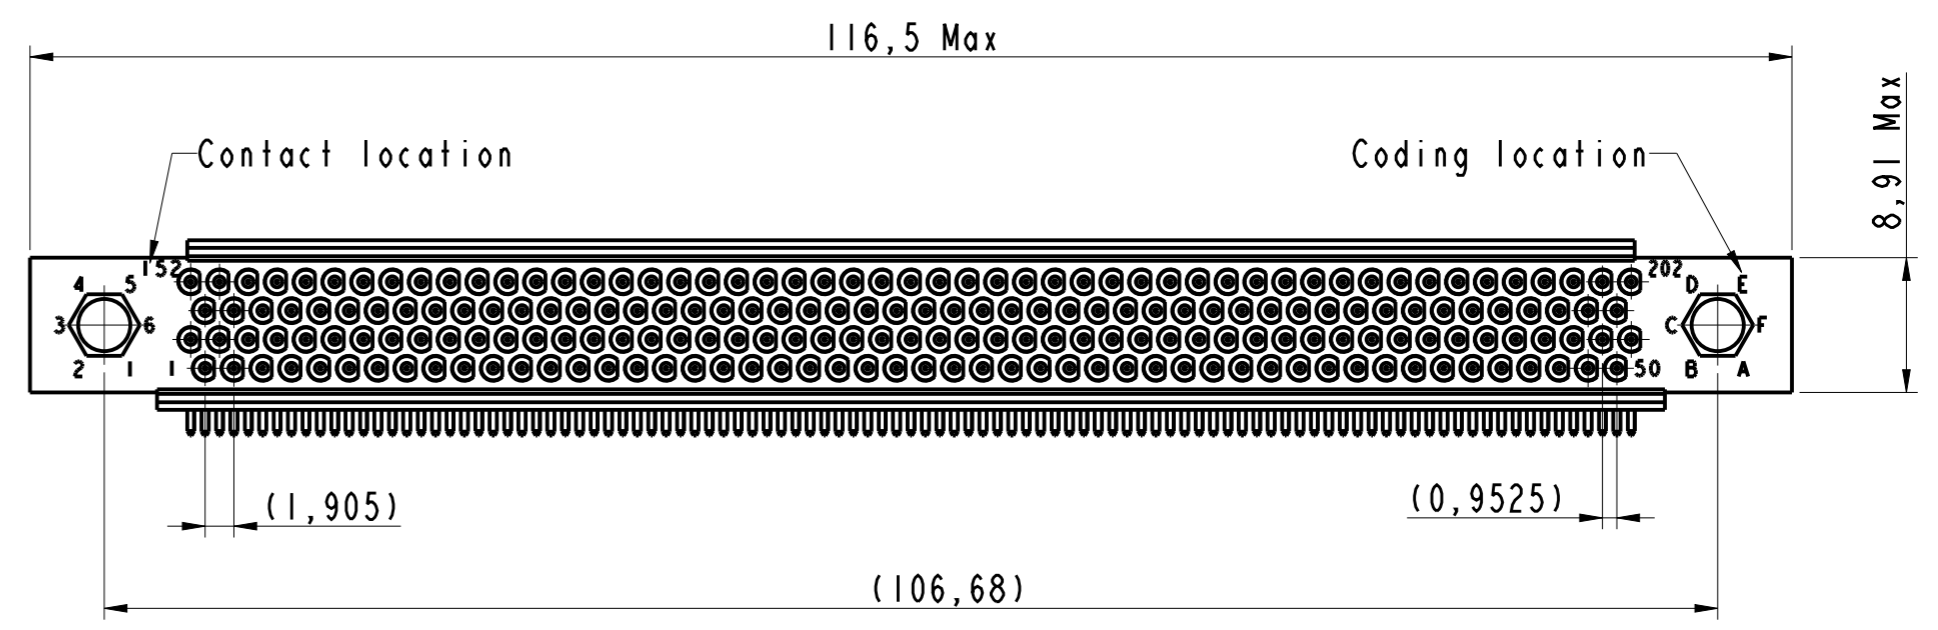

# HDAS F 202 YCX-XXX XX

DRAWN BY : S Satpute		UPDATED BY : S Satpute		LAST APPROVED BY : T Carrier	
ALL DIMENSIONS ARE IN MM	AMPHENOL SOCAPEX			ORIGINAL DRAWING DATE : 09/03/2017	CONFIGURATION DATA ARE AVAILABLE IN PDM
				REV : E	PAGE : 1/2
SCALE : 2	B.P. 29 74311 THYEZ CEDEX			169-PLC-1328-00	

# PCB Layout Face A

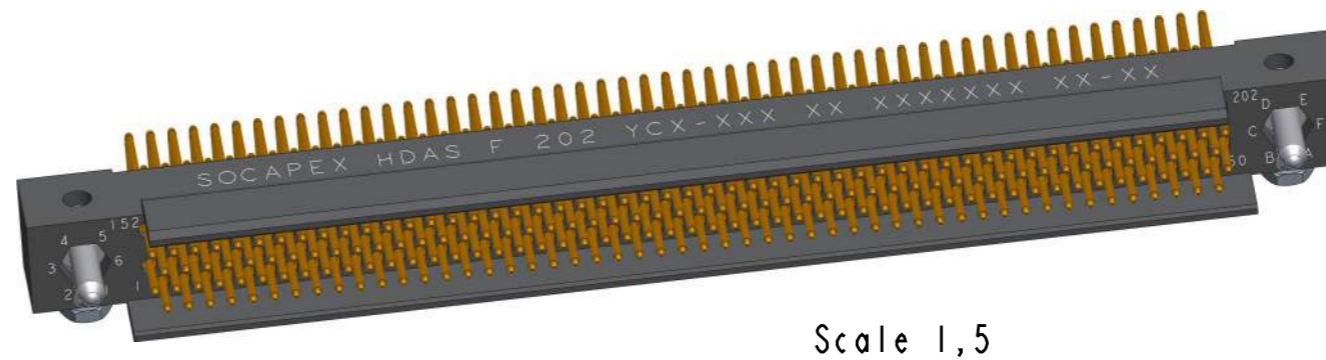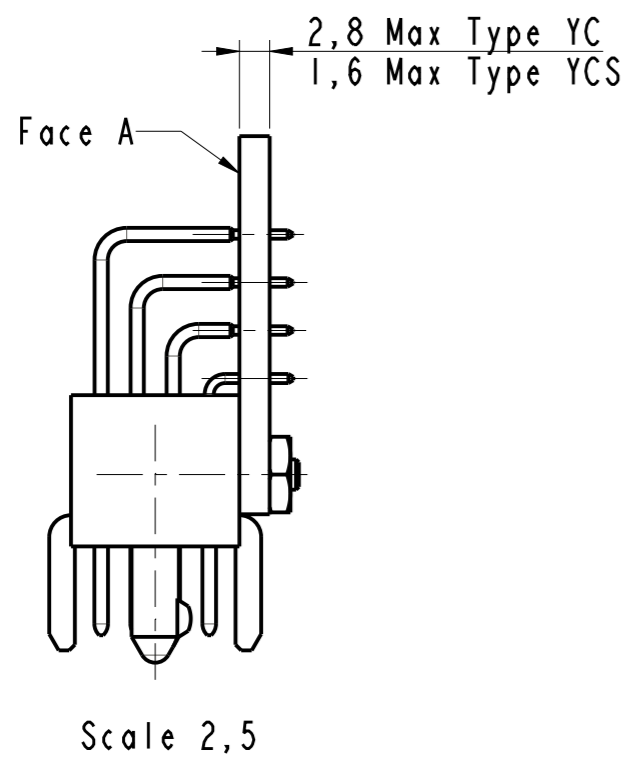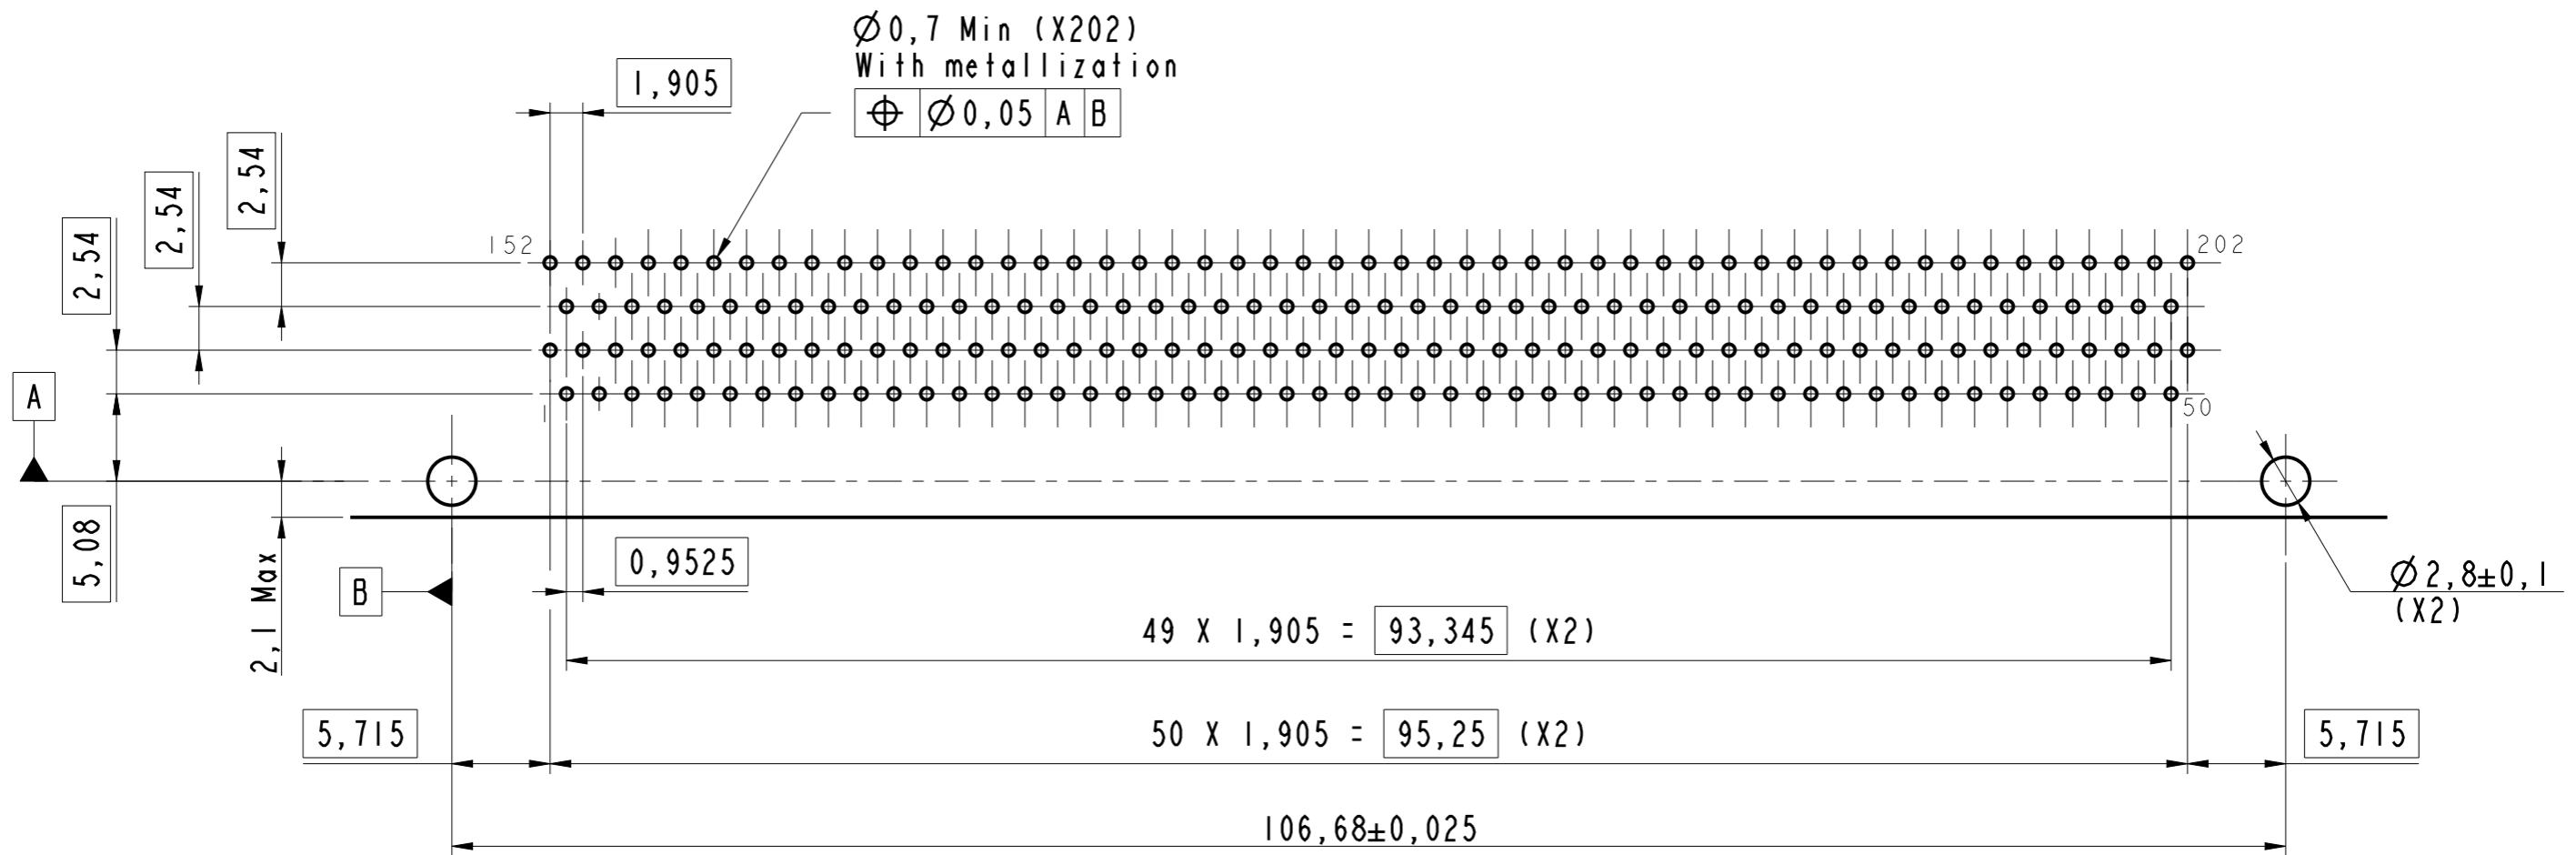

## HDAS F 202 YCX-XXX XX

DRAWN BY : S Satpute		UPDATED BY: S Satpute		LAST APPROVED BY: T Carrier	
ALL DIMENSIONS ARE IN MM		AMPHENOL SOCAPEX		ORIGINAL DRAWING DATE : 09/03/2017	CONFIGURATION DATA ARE AVAILABLE IN PDM
SCALE : 3				REV : E	PAGE : 2/2
		B.P. 29 74311 THYEZ CEDEX		169-PLC-1328-00	

IN THE CONSTANT PURPOSE OF IMPROVING ITS PRODUCTS, Amphenol Socapex RESERVES THE RIGHT TO MODIFY ANY DIMENSION OR CHARACTERISTICS.  
 FM.NPD.0036.THYEZ.PUNE rev C