
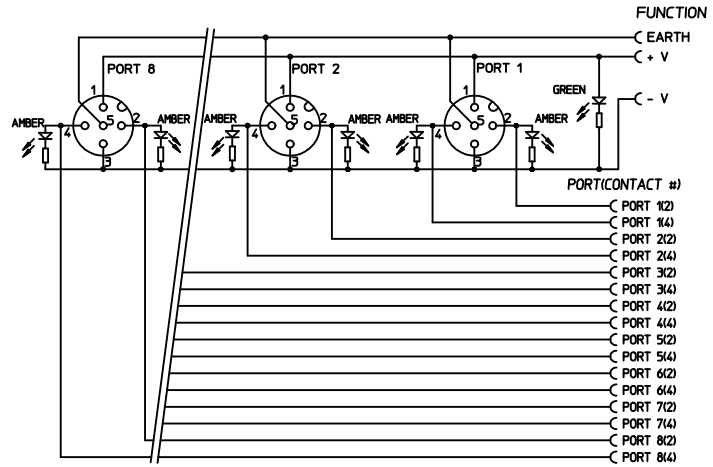


10 9 8 7 6 5 4 3 2 1

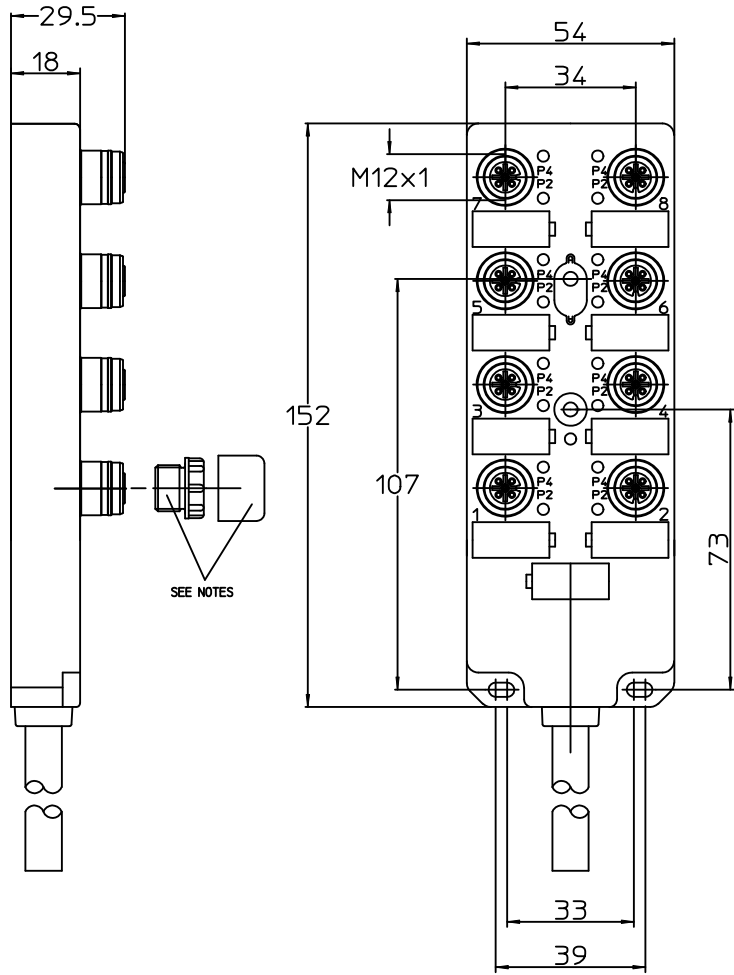

- FUNCTION**
- C EARTH
 - C + V
 - C - V
- Cable Colour**
- GREEN/YELLOW
 - BROWN
 - BLUE
- Cable Colour**
- GREY/PINK
 - WHITE
 - RED/BLUE
 - GREEN
 - WHITE/GREEN
 - YELLOW
 - BROWN/GREEN
 - GREY
 - WHITE/YELLOW
 - PINK
 - YELLOW/BROWN
 - RED
 - WHITE/GREY
 - BLACK
 - GREY/BROWN
 - VIOLET

SPECIFICATION
MATERIALS:
 HOUSING & INSERT: PBT
 COUPLING: BRASS-NICKEL PLATED
 O-RING: VITON
ELECTRICAL:
 VOLTAGE: 10-30VDC
 CURRENT RATING: 4A PER PORT, 12 AMPS MAX.
 PROTECTION CLASS: IP68

NOTES:
 THREADED PLUG FITTED TO PORTS 1 & 2 ONLY
 PROTECTION CAP FITTED TO ALL M12 PORTS
 FIXING HOLES TO SUIT M4 SCREWS

SAP-Nummer	alte Artikel-Nr.	Beschreibung	Farbe
SAP-NUMBER	OLD ENGINEERING-No.	DESCRIPTION	COLOR
1201190028	BKY805P-FBP-03	ULTRA-LOCK MPIS 8 WAY - 16 I/O -3M	gelb/YELLOW
1201190023	BKY805P-FBP-05	ULTRA-LOCK MPIS 8 WAY - 16 I/O -5M	gelb/YELLOW
1201195001	BKY805P-FBP-05A	ULTRA-LOCK MPIS 8 WAY - 16 I/O -5M	gelb/YELLOW
1201148005	BKY805P-FBP-10	ULTRA-LOCK MPIS 8 WAY - 16 I/O -10M	gelb/YELLOW
1201190039	BKY805P-FBP-15	ULTRA-LOCK MPIS 8 WAY - 16 I/O -15M	gelb/YELLOW
1201190040	BKY805P-FBP-20	ULTRA-LOCK MPIS 8 WAY - 16 I/O -20M	gelb/YELLOW

NEW RELEASE
 EC NO: WEU2010-0220
 DRWN:SBH
 CHKD:
 APPR:FPACHER

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
▽=0	4 PLACES ± ---	± ---
∇=0	3 PLACES ± ---	± ---
	2 PLACES ± 0.05	± ---
	1 PLACE ± 0.10	± ---
	ANGULAR ± ---°	

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM ONLY			METRIC	
DRAWN BY	DATE	TITLE		
SBH	2009/12/10	ULTRA-LOCK MPIS 8 WAY - 16 I/O -XM -PUR		
CHECKED BY	DATE			
APOHL_WEU	2009/12/10			
APPROVED BY	DATE			
FPACHER	2009/12/17			
MATERIAL NO.	DOCUMENT NO.			
SEE TABLE	SD-120119-023			

MATERIAL NO.		DOCUMENT NO.	SHEET NO.
SEE TABLE		SD-120119-023	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2 1