



REVISES			DATE	DWN	APVD
P	LTR	DESCRIPTION			
S		REVISED PER 0G3B-0095-05	4/1/05	SS	GS

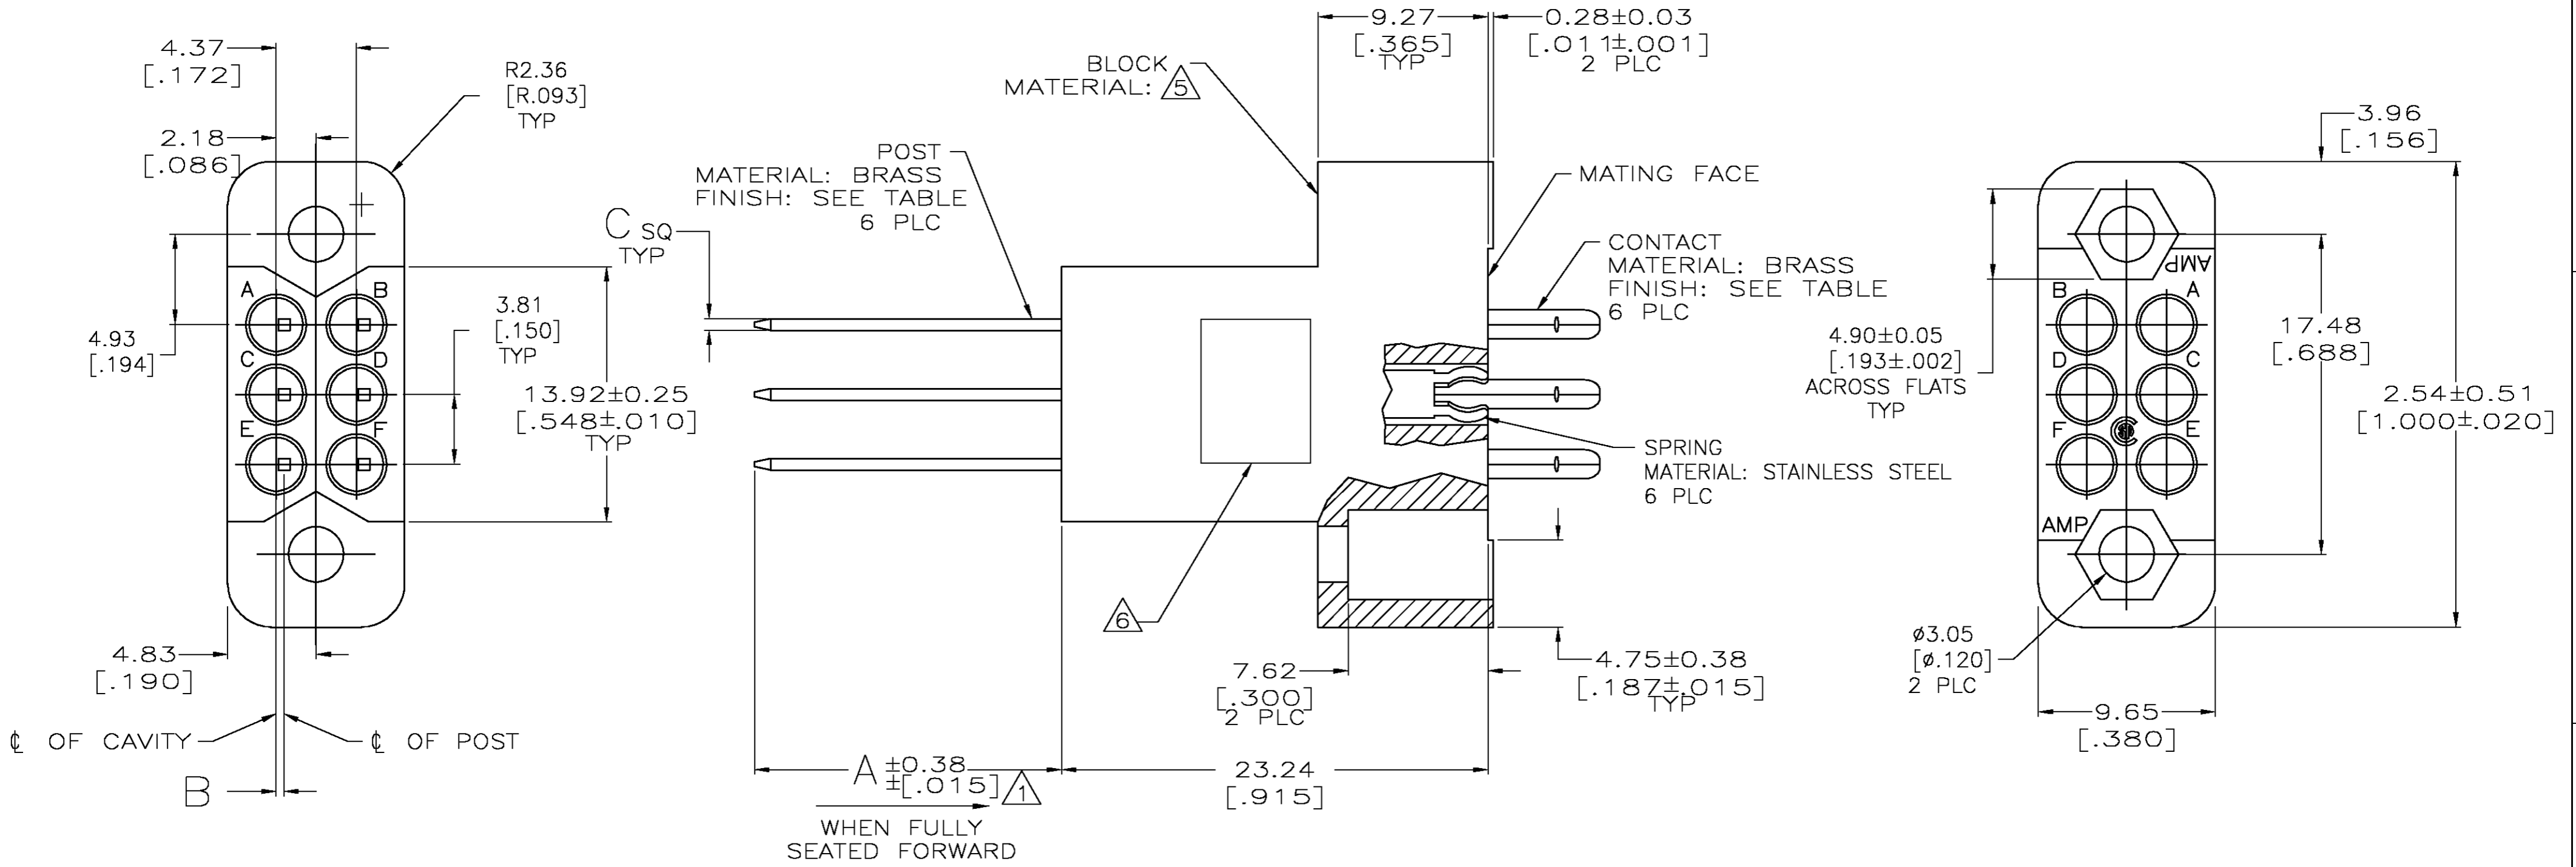

- ① POSTS ARE SEMI-AUTOMATICALLY WIRABLE AND WILL ACCOMODATE (SEE TABLE) TERMINATIONS.
- 2. #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
- ③ 0.76um[.000030] MIN GOLD FOR A DISTANCE OF 5.08[.200] MIN FROM MATING END. GOLD FLASH ON REMAINDER, ALL OVER 1.27um[.000050] MIN NICKEL.
- ④ 2.54um[.000100] MIN TIN-LEAD OVER 1.27um[.000050] MIN NICKEL.
- ⑤ PHENOLIC, BLACK.
- ⑥ AMP, PART NUMBER & DATE CODE MARKED IN THIS AREA.
- ⑦ 2.54um[.000100] MIN TIN OVER 1.27um[.000050] MIN NICKEL.

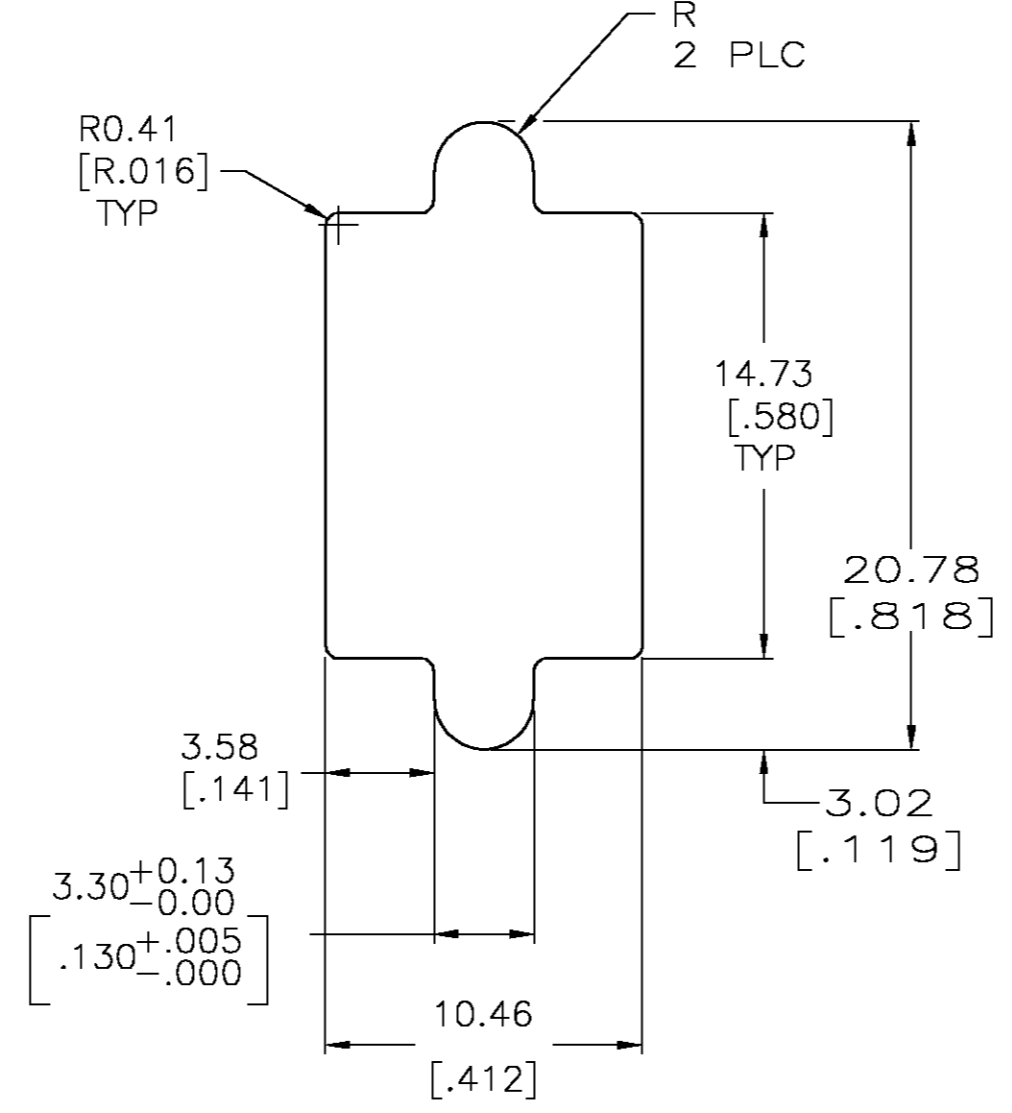

POST FINISH	C	B	A	CONTACT FINISH	NO OF TERM	PART NUMBER
③	0.64 [.025]	0.43 [.017]	16.74 [.659]	③	3	3-205507-7
④	1.14 [.045]	0.13 [.005]	8.89 [.350]	④	1	3-205507-6
④	0.64 [.025]	0.43 [.017]	16.74 [.659]	③	3	205507-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M.BINNER	13 OCT 97	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm		CHK	R.STONE	24 OCT 97	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	G.STEINHAUER	31 OCT 97	
0 PLC ± - 1 PLC ± - 2 PLC ± ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± ±		APPLICATION SPEC		NAME	
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		WEIGHT -	SIZE A2
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	REV S