GlobTek, Inc.  www.globtek.com  Drawing Title: JST XHP-4 2.54MM 4 CIRCUIT CONNECTOR OR EQUAL to MOLEX HOUSING, 3 circuit, 3.96mm Pitch 09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT, GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals: , 70mm,		
186 Veterans Drive,	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

#### Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

#### Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

## **Customer Approval of Specification:**

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com	22AWC WIDE 1 RI ACK 1 WHITE: 22 / 2 Conductors 1 6mm OD 1 II 1007 80 Deg C 300V 1 RI ACK 1 WHITE Approvals: 70mm		
	Model No. Low voltage cable		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A	
Fax (201) 784-0111			

## **REVISION HISTORY**

REV	DESCRIPTION	SUB	DATE	APPROVED
А	NEW RELEASE	DR	01/07/2019	QA

Cordset Information:

CordsetColor:

Cord Length (mm):70

## NOTES:

END A MATES TO GTM43007-A, GTM91120, GTM41080, AND GTM21096 OPEN FRAME OUTPUT CONNECTOR. END B MATES TO GTM43007, GTM91110P, AND GTM2065 INPUT CONNECTOR

CIOD I CIX, IIIO.	Drawing Title: JST XHP-4 2.54MM 4 CIRCUIT CONNECTOR OR EQUAL to MOLEX HOUSING, 3 circuit, 3.96mm Pitch 09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT, GT 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals:, 70mm,	Cable #2*UL1007
	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A
Fax (201) 784-0111		

# END A



Mates with: B4B-XH-A(LF)(SN), S4B-XH-A(LF)(SN),

### END B




Mates with: 26604030, 417910833, 1718140003, 26481036, 1718130003, 1718133003, 417920512, 416710002, 26482032, 26602030, 417910850, 26603030, 26481032, 26614030, 26481030, 1718141003, 26486034, 26482036, 26605030, 1718133003, 26644030, 26481035, 26615030, 26481031, 26645030, 26482031, 416710025, 26482035

GlobTek, Inc. www.globtek.com	Drawing Title: JST XHP-4 2.54MM 4 CIRCUIT CONNECTOR OR EQUAL to MOLEX HOUSING, 3 circuit, 3.96mm Pitch 09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT, GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals: , 70mm,	
186 Veterans Drive,	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A
Fax (201) 784-0111		

S4B-XH-SM4-TB(LF)(SN), B4B-XH-AM(LF)(SN),	S4B-XH-SM4-TB(LF)(SN), S4B-XH-SM4-TB(LF)(SN),
	S4B-XH-SM4-TB(LF)(SN), B4B-XH-AM(LF)(SN),

CIOD I CIX, IIIO.	22AWC WIDE 1 RI ACK 1 WHITE: 22 / 2 Conductors 1 6mm OD 1 II 1007, 80 Deg C 300V 1 RI ACK 1 WHITE Approvals: 70mm		
•	Model No. Low voltage cable		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A	
Fax (201) 784-0111			

CIOD I CIX, II IC.	22AWG WIRE 1 BLACK 1 WHITE: 22 / 2 Conductors 1 6mm OD 1 II 1007, 80 Dea C 200V 1 BLACK 1 WHITE Approvals: 70mm		
•	Model No. Low voltage cable		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A	
Fax (201) 784-0111			

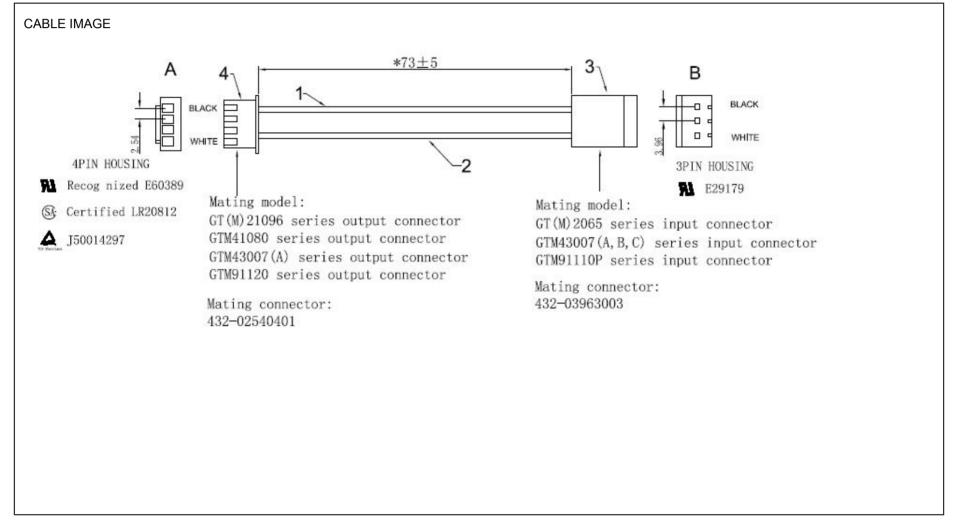

CIOD I CIN, II IC.	Drawing Title: JST XHP-4 2.54MM 4 CIRCUIT CONNECTOR OR EQUAL to MOLEX HOUSING, 3 circuit, 3.96mm Pitch 09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT, GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals: , 70mm,		
	Model No. Low voltage cable		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. XHP410070M7MLX3(R)	Rev A	
Fax (201) 784-0111			

Cable	End B
Code:2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE	Code:MLX3
Description:GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1	Description:MOLEX HOUSING, 3 circuit, 3.96mm Pitch
WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C,	09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT
300V, 1 BLACK, 1 WHITE, Approvals:	Rating (V):250
Color:GlobTek Black	Rating (A):7.0
Wire Gauge(AWG):22	Gender:Female
Cond:2	Overmolded:No
Type:UL1007	
Temperature:80° C	
Amps:3	
Volts:300	
OD:1.6	
ConductorsColors:1 BLACK, 1 WHITE	
	Code:2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE Description:GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals: Color:GlobTek Black Wire Gauge(AWG):22 Cond:2 Type:UL1007 Temperature:80° C Amps:3 Volts:300 OD:1.6

Plug Approvals		Cable Approvals		Connector Approvals
<b>A</b> B	UL RECOGNIZED		UL RECOGNIZED	
AGENCY ONLINE DOCUM	1ENTS	http://en.globtek.com/cordsets/		<u> </u>
RoHS/RoHS3 Declaration		https://www.globtek.com/pdf/rohs_cert/0	1t0c000008pplQAAQ	
REACH Declaration		https://www.globtek.com/pdf/iso_certifica	ates/REACH.pdf	
Conflict Minerals Declaration	on	https://www.globtek.com/pdf/conflict-mir	erals.pdf	
Prop 65 Statement		https://en.globtek.com/prop-65-statemer	nt.pdf	
CE.UKCA.Cord		https://globtek.secure.force.com/spec/ed	c_decl_product_model_family_incl_o	cord?id=01t0c000008pplQ
IPXY rating is based on 3rd	party testing and cus	tomers should check suitability and test s	ystem level IPXY rating before orde	ering.

#### PROPRIETARY INFORMATION

GlobTek, Inc. www.globtek.com	Drawing Title: JST XHP-4 2.54MM 4 CIRCUIT CONNECTOR OR EQUAL to MOLEX HOUSING, 3 circuit, 3.96mm Pitch 09-93-0300 WITH TERMINAL 0008520132 OR EQUIVALENT, GT Cable #2*UL1007 22AWG WIRE, 1 BLACK, 1 WHITE: 22 / 2 Conductors, 1.6mm OD, UL1007, 80 Deg.C, 300V, 1 BLACK, 1 WHITE, Approvals: , 70mm,				
	Model No. Low voltage cable				
Northvale, NJ 07647					
Tel. (201) 784-1000					
Fax (201) 784-0111					

Hanking:NO HANK
Description:NO HANK, BULK PACKED
Image:
Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):