


SECTION A-A

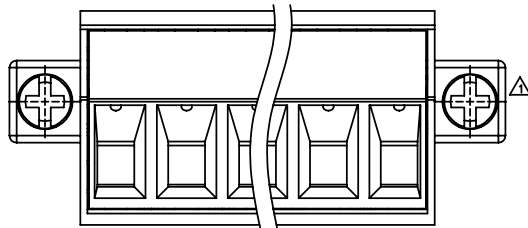

SIGN	DATE	DESCRIPTION	APPROVER
△	12/15'08	Flange screw changed from "-solt type to "+/-solt type	Kind
△	12/15'08	Operating Temp. changed from -30°C +105°C to -40°C +115°C	Kind
△	2010.03.08	Add the 2P mark	Jacke

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item a Terminal body:Thermoplastic (UL94V-0)
- Item b Terminal cover:Thermoplastic (UL94V-0)
- Item c Female contact:PhBz (CuSn) Tin plated
- Item d Terminal body:Brass, Ni plated
- Item e Terminal screw:Steel Zinc plating "- slot type
- △ Item f With flange screw:Steel Zinc plating M2.5"+/- slot type

Electrical

- Voltage rating:300V
- Current rating:20A
- Solid wire(AWG):12-24
- Stranded wire(AWG):12-24
- Torque(Lb-In): 5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Safety Approval: us

TJ xx 71x 7 xxxx G

02	2 POLES	0	Black (RAL9005)	000 0	Standard @ Logo	Pb < 40,000ppm
03	3 POLES	2	Red (RAL3001/D)	000 A	Standard ANY Logo	(RoHS)
...	...	3	Orange(RAL2011/P)	Any special item by customer request, please contact sales department.		
24	24 POLES	4	Yellow(RAL1018/A)	5	Green(RAL6018/T)	
				6	Blue (RAL5015/A)	
				8	Grey(RAL7035/D)	

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	±0.15				±0.20				±0.25			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	
Dim B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	
TOL	±0.25			±0.30			±0.40					

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ 5.0 Series With flange contact on up side				
PART NO.		TJxx71x7xxxxG		DWG NO.		8TJ0902
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacke	Jacke			X. ±0.50
		2010.03.08	2010.03.08			X.X ±0.30
						UNIT: mm
						SCALE: NONE
				SHEET: 01/01		X.XX ±0.10
						X° ±1°