


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-13	NEMA 5-15P	1	black overmold
2	TLY-28	IEC320 C5	1	black overmold
3	30-00244	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC	1	
4	Label	Adhesive flag, 15x100 mm	1	white with black font

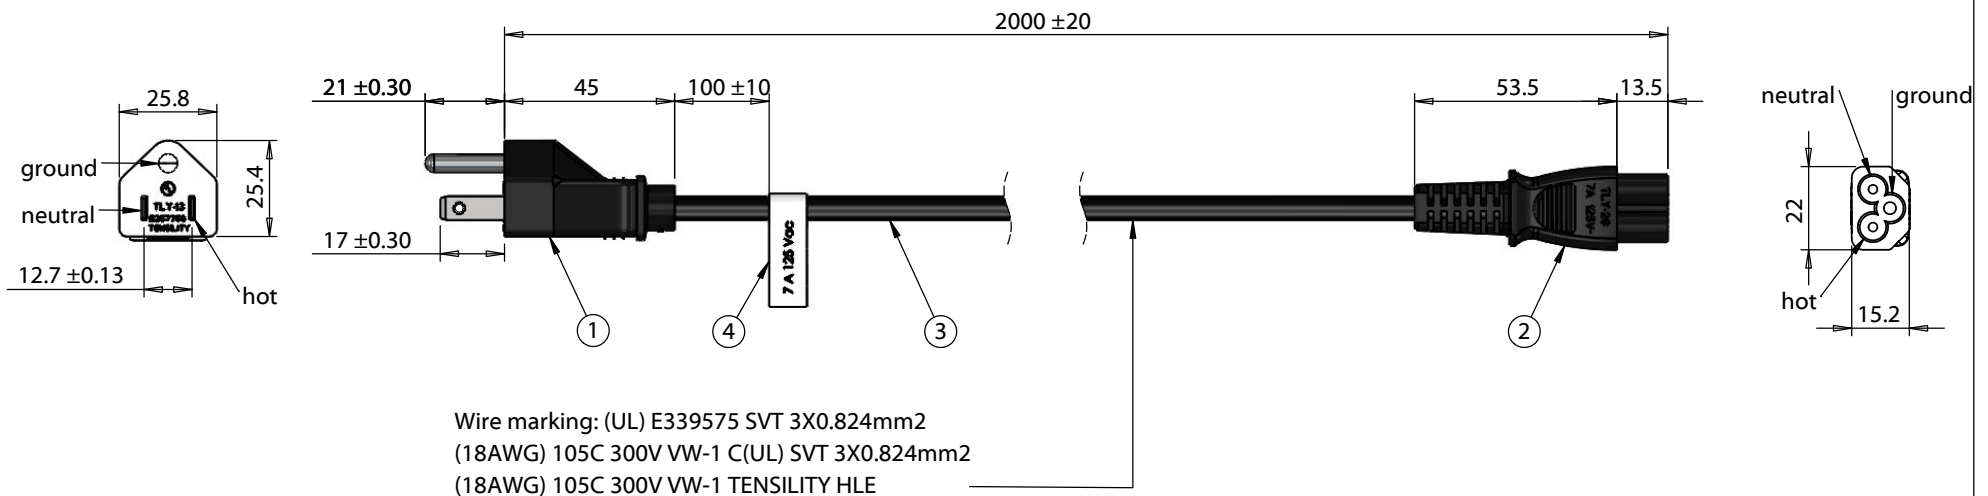

Wiring Diagram		
TLY-13	wire color	TLY-28
hot	black	hot
neutral	white	neutral
ground	green	ground

**Notes:**  
Electrical requirements: 7 A at 125 Vac

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/20/2013	Initial release	GL <small>Digitally signed by GL Date: 2019.06.20 16:25:12 -07'00'</small>		
			Verified: AW <small>Digitally signed by AW Date: 2019.06.20 16:38:10 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY-13 to C5, TLY-28, 18 AWG, SVT wire, 30-00244	
			Size: A		Part number: 11-00056
			Scale: 1:2		Sheet 1 of 1