

2906230

https://www.phoenixcontact.com/us/products/2906230

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universally configurable 4-way signal conditioner, with switching output and plug-in connection technology for the electrical isolation of analog signals. Configurable via DIP switch or software. Push-in connection technology, order configuration.

Commercial data

Item number	2906230
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C444
Product key	CK4A12
GTIN	4055626048130
Weight per piece (including packing)	117.6 g
Weight per piece (excluding packing)	98 g
Customs tariff number	85437090
Country of origin	DE



2906230

https://www.phoenixcontact.com/us/products/2906230

Technical data

Notes

ı	1411	1-01	tion	rac	tria	tion

EMC note	EMC: class A product, see manufacturer's declaration in the
	download area

Product properties

D 1 ()	0: 1 10:
Product type	Signal conditioner

Electrical properties

General

Accuracy class	1

Input data

Signal

Input signal (at 50 Hz)	100 mV (1000 A)
Measurement	
Number of inputs	1
Current transformers	
Primary rated current I _{pn}	4000 A
·	
Accuracy class	1

Output data

Signal

Configurable/programmable	Yes
Voltage output signal	0 V 10 V (via DIP switch)
	2 V 10 V (via DIP switch)
	0 V 5 V (via DIP switch)
	1 V 5 V (via DIP switch)
	0 V 10.5 V (can be set via software)
Max. voltage output signal	approx. 12.3 V
Current output signal	0 mA 20 mA (via DIP switch)
	4 mA 20 mA (via DIP switch)
	0 mA 10 mA (via DIP switch)
	2 mA 10 mA (via DIP switch)
	0 mA 21 mA (can be set via software)
Max. current output signal	24.6 mA
Load/output load voltage output	≥ 10 kΩ
Load/output load current output	≤ 600 Ω (20 mA)
Ripple	< 20 mV _{PP}



2906230

https://www.phoenixcontact.com/us/products/2906230


	< 20 mV _{PP}	
Connection data		
Connection method	Push-in connection	
Stripping length	10 mm	
Measuring transducer side		
Connection method	Push-in connection	
Stripping length	10 mm	
Screw thread	M3	
Conductor cross section rigid	0.2 mm² 2.5 mm²	
Conductor cross section flexible	0.2 mm² 2.5 mm²	
Conductor cross section AWG	26 12	
Environmental and real-life conditions Ambient conditions		
Ambient temperature (operation)	-40 °C 85 °C	
Approvals UKCA		
Certificate	UKCA-compliant	
СМІМ		
Certificate	CMIM-compliant	
Mounting		
Mounting type	DIN rail mounting	



2906230

https://www.phoenixcontact.com/us/products/2906230

Drawings

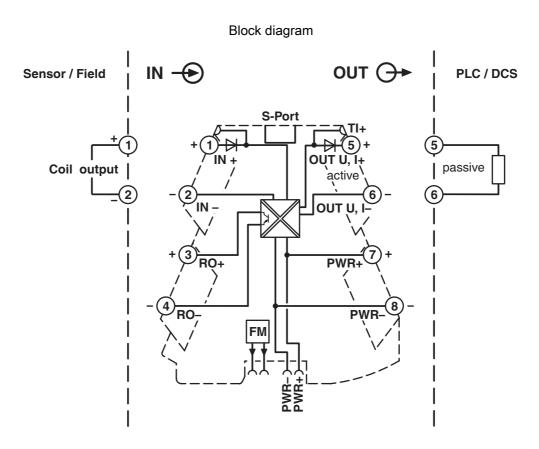



2906230

https://www.phoenixcontact.com/us/products/2906230

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2906230



EAC

Approval ID: RU*DE*08.B.01187/19



UL Listed

Approval ID: FILE E 123528



cUL Listed

Approval ID: FILE E 123528

cULus Listed



2906230

https://www.phoenixcontact.com/us/products/2906230

Classifications

ECLASS

UNSPSC 21.0

ECLASS-11.0	27210120	
ECLASS-12.0	27210120	
ECLASS-13.0	27210120	
ETIM		
ETIM 8.0	EC002653	
UNSPSC		

39121000



2906230

https://www.phoenixcontact.com/us/products/2906230

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com