

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	8	PC
D	--	RESIN BLEND STPRNE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	4CX16AWG UNSHD BK UL2464	BLACK
A2	B2		RED
A3	B3		WHITE
A4	B4		GREEN

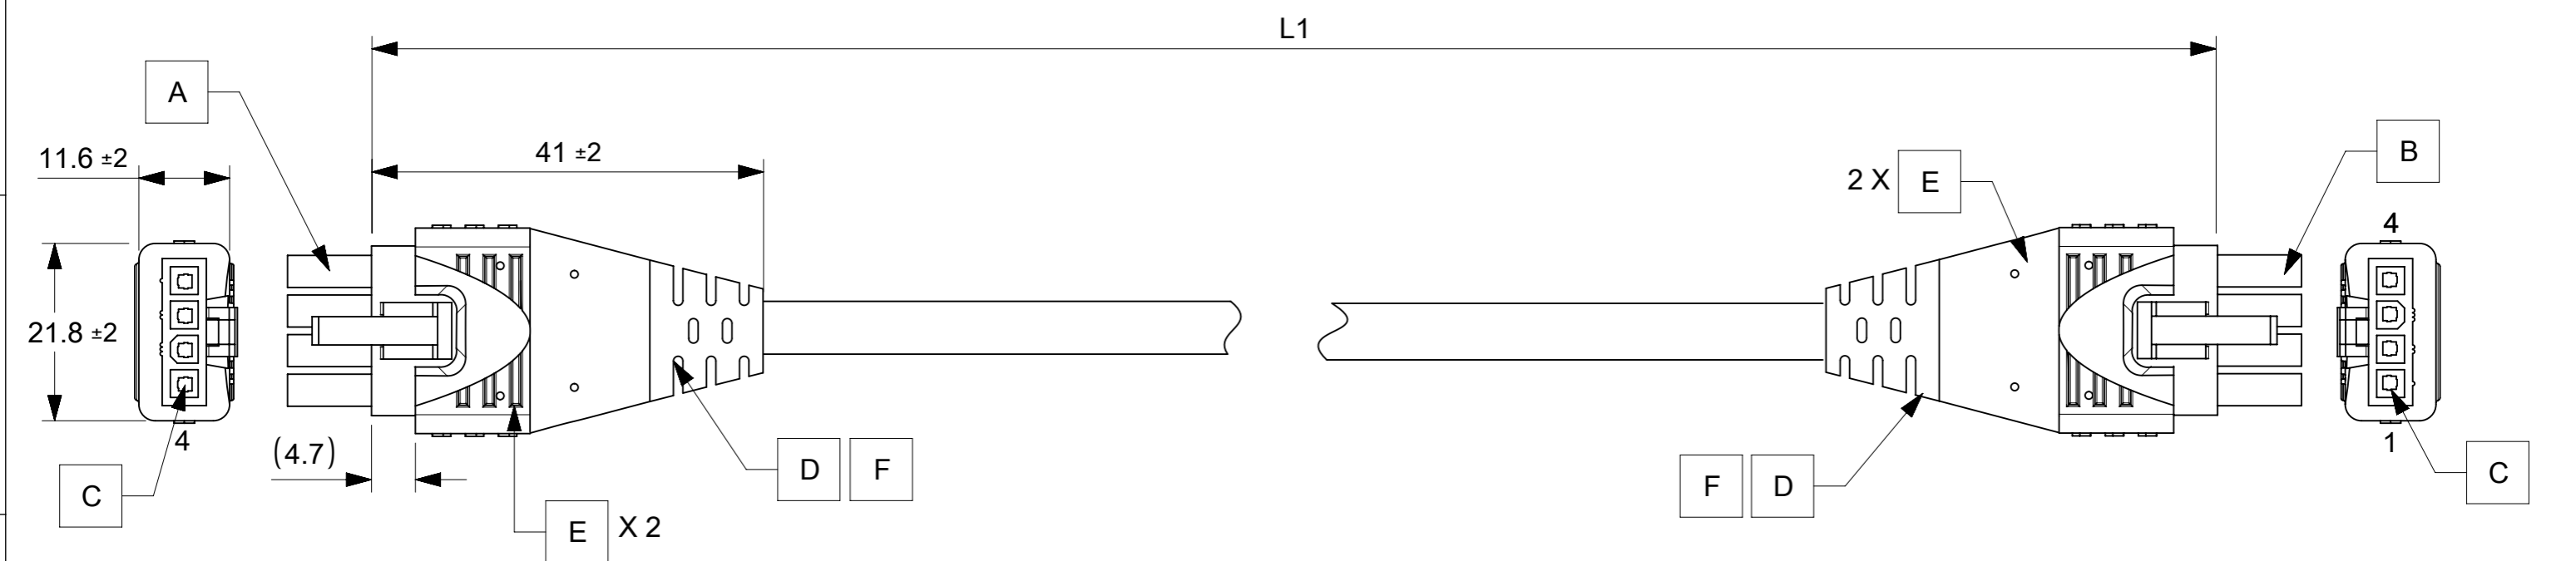


TABLE		
PART NUMBER	TITLE	L1
2153300405	4CKT OVERMOLDED MINIFIT JR CABLE 500MM	500±10
2153300410	4CKT OVERMOLDED MINIFIT JR CABLE 1M	1000±20
2153300420	4CKT OVERMOLDED MINIFIT JR CABLE 2M	2000±25
2153300430	4CKT OVERMOLDED MINIFIT JR CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN.
 - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex
	DIMENSION UNITS	SCALE		
$\nabla_A = 0$	mm	NTS		
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)			
$\nabla_{E'} = 0$	ANGULAR TOL ± °			
DIVISIONAL SYMBOLS	4 PLACES ±			
	3 PLACES ±			
	2 PLACES ±			
	1 PLACE ±			
	0 PLACES ±			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES
			A3-SIZE	215330
DOCUMENT NUMBER		CUSTOMER	DOC TYPE	DOC PART
2153300405		GENERAL MARKET	PSD	000
REVISION		DATE	REV	REV
SHEET NUMBER		1 OF 1		