


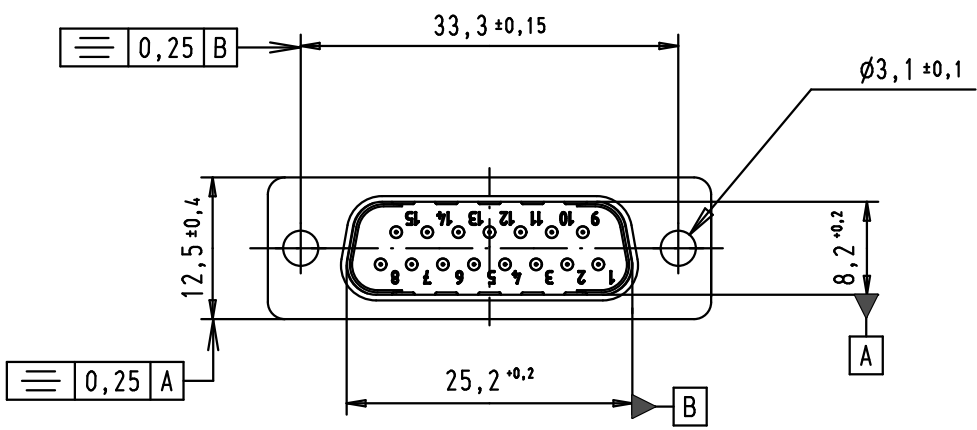


5 4 3 2 1

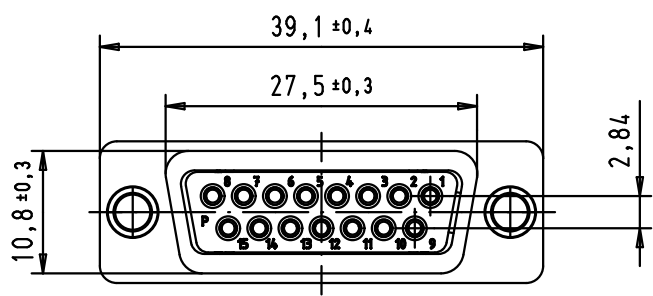

Solder buckets for AWG 20 Max

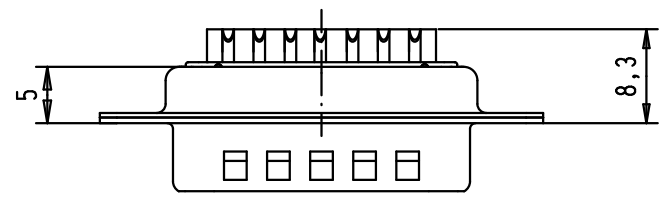

SPECIFICATION

| | |
|-----------------------|------------|
| Performance level | PL2 |
| Filter type | C |
| Capacitance | 3900pf±20% |
| Working Voltage | 100v |
| Current Rating | 7.5A |
| Insulation Resistance | >1GΩ |

| FREQUENCY (MHz) | ATTENUATION dB |
|-----------------|----------------|
| 5 | 6dB |
| 10 | 11dB |
| 50 | 25dB |
| 100 | 35dB |
| 500 | 35dB |
| 1000 | 32dB |

D
C
B
A

| | | | | | | |
|-------|----------|------|-------------------------------|----------|------|--|
| | | | | Dat. | Name | |
| | | | Detail. | 8-JUL-02 | CV | |
| | | | Insp. | 12/01/12 | JB | |
| | | | Stand. | | | |
| 36283 | 12/01/12 | SD | | | | |
| 33267 | 17/11/05 | JMDR | | | | |
| 31058 | 8-JUL-02 | CV | | | | |
| Mod. | Dat. | Name | HARTING EURL F-95972 Paris | | | |

D-Sub, male, straight
15 Poles, solder buckets,
with dimples and holes

Ma?Mstab/
Scale
1.5:1

TB 09642217240

Blatt/ Page
1 / 1

Sub.