


1 2 3 4 5 6 7

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

**NOTES:**

Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over  
 Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over  
 Spring : Stainless Steel  
 Mechanical Characteristics:  
 Spring Force : 60g ± 20% at Working Length  
 Mechanical Life : 1,000,000 cycle  
 Electrical Characteristics:  
 Current Rating : 2A  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature range : -55~125° C  
 Packing: PE Bag.

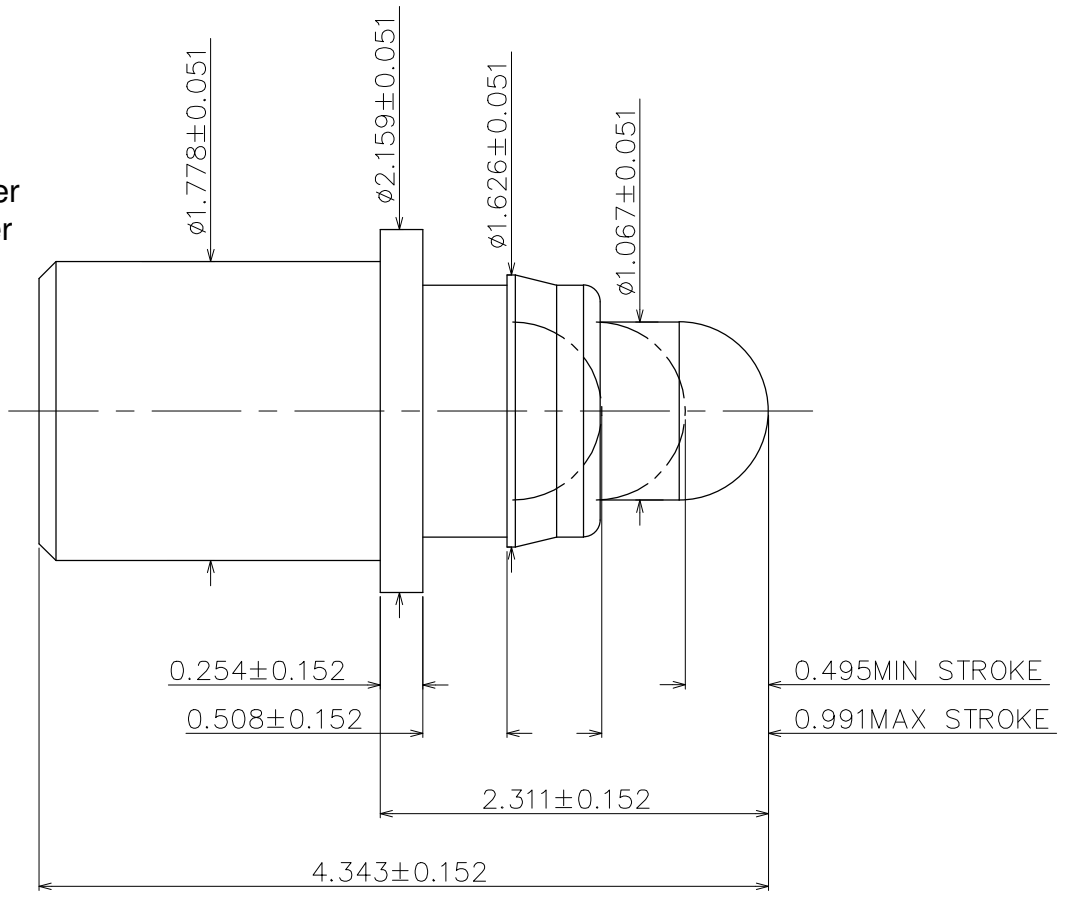

**RoHS compliant**  
Unit: mm

Scale	Free					Date	Name	Customer-No.	
TOLERANCE						Drawn	28.03.2018	Tom	
X.X	±0.20					Approved	28.03.2018	Winnie	
X.XX	±0.10							ASSMANN WSW-No. A-CSL-S-020-B3	
X.XXX	±0.08							Drawing-No.	
DIM	TOL							ASS 7896 CO	rev00
Angle	±3°	ⓐ	Drawn	28.03.2018	Tom			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				

1 2 3 4 5 6 7