

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/4/14	
A		UPDATE DRAWING	9/3/20	AY/EY

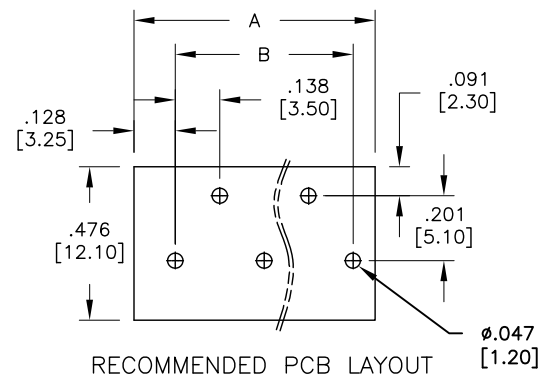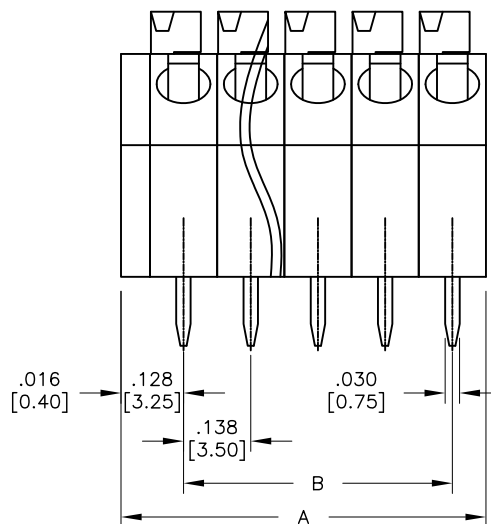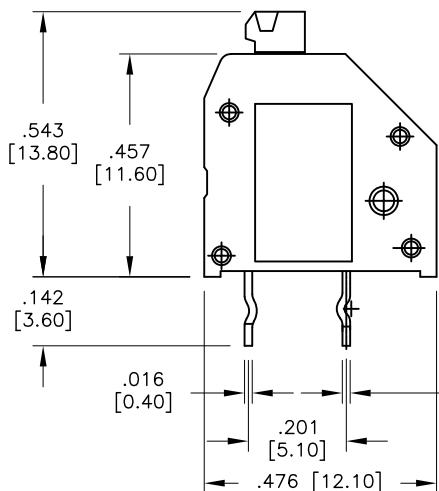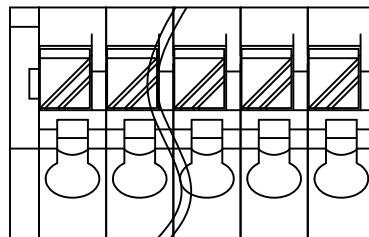

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Grey
 Contact: Copper Alloy, Tin plated

Electrical:
 Voltage rating: 300V
 Current rating: 5A
 Dielectric withstanding voltage: 1600V for 1 minute

Mechanical:
 Wire range: 22~18 AWG
 Strip length: 8-9 mm
 Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant.



Poles: 01 thru 30P

A= .138 [3.50] x No. of Poles + .059 [1.50]

B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	AY	8/4/14
CHECKED	SY	8/4/14
APPROVED		

TITLE			
MINI TYPE, SIMPLE TYPE CAGE CLAMP TERMINAL BLOCKS, 3.50MM PITCH			
SIZE	PART NO.	REV.	
X	EB59A-XX-A	A	
REF:	S00067C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1