

Series 226H

3.9x2.9mm Compact Tactile Switch

- Surface mount J bend terminal configurations
- Compatible with IR reflow and manual soldering



Ordering Information

Series	Terminal Type	Actuating Direction	Actuator Height "L"	Actuator Force	Packaging	Boss
226H	J1	V	A	A	R	B

Code	Spec.
J1	Surface mount J bend type1

Code	Spec.
A	160 gf
B	250 gf

Code	Spec.
V	Vertical

Code	Spec.
A	2.0mm
B	2.5mm
C	1.5mm

Code	Spec.
R	Tape & reel packaging

Code	Spec.
B	With boss, only for 2.0 & 2.5mm actuator height
Blank	No boss

Notes: Contact CTS for other common features not listed.


Electrical Specifications

Parameter	Conditions & Remarks	Min	Max	Unit
Contact Resistance			100	milliohms
Insulation Resistance	Between insulated terminals	100		Megohms
Dielectric Strength	1 minute between adjacent switches		250	VAC
Nonswitching Rating			50 or 12	mA or VDC

Mechanical and Environmental

Soldering	Maximum reflow temperature, 260°C for 5 seconds Maximum manual temperature, 350°C for 3 seconds			
Actuation Life	160 gf 250 gf	200,000 100,000		cycles
RoHS	Lead-Free. Fully compliant to RoHS Directive 2011/65/EU			
Operating Force	160±50 gf 250±50 gf			
Actuator Strength	3 Kgf maximum			
Travel	0.2±0.1 mm			
Packaging	Standard tape and reel packaging			
Operating Temperature Range	-40°C to +85°C			
Storage Temperature Range	-40°C to +85°C			

Soldering Profile

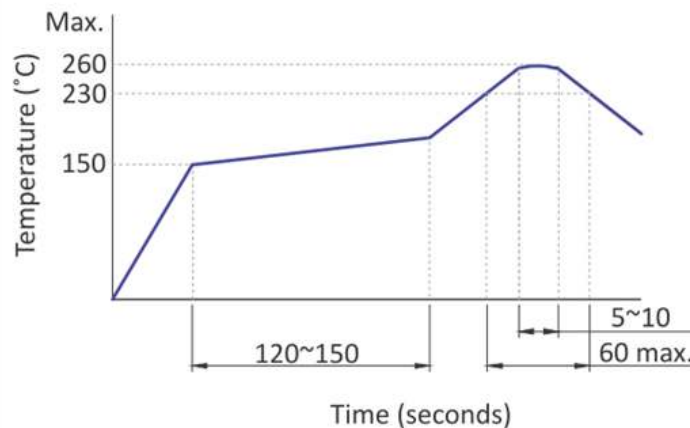

Mechanical Specifications

Figure 1 – 226HJ1VA/B...(B), Surface Mount J Bend Type1, With Middle/Long Actuator


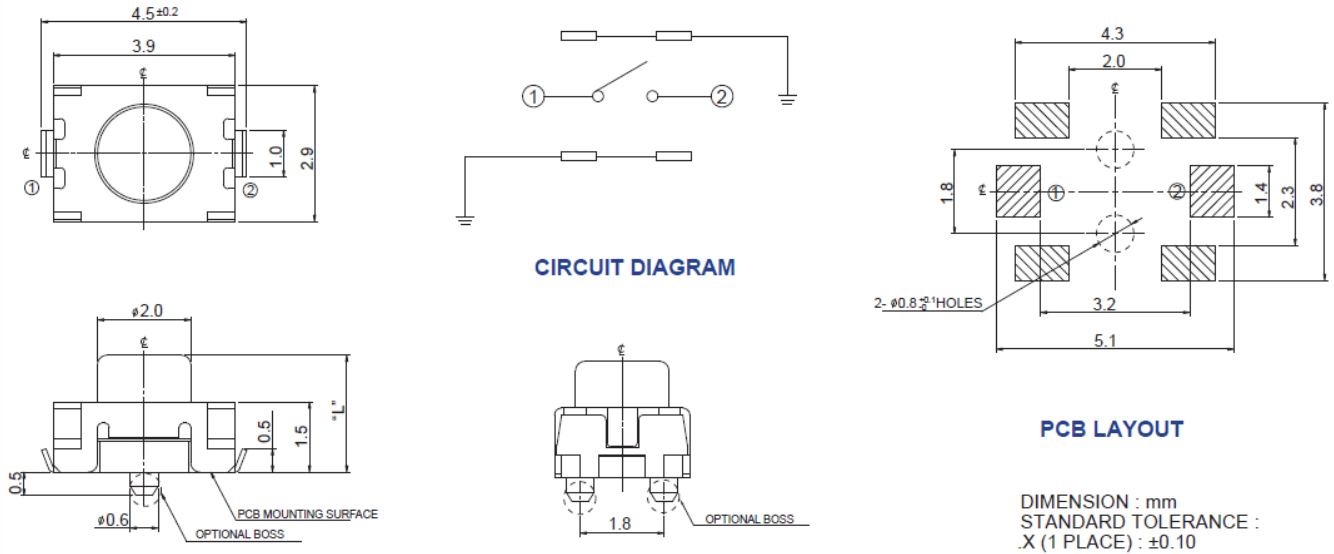


Figure 2 – 226HJ1VC..., Surface Mount J Bend Type1, With Flush Actuator

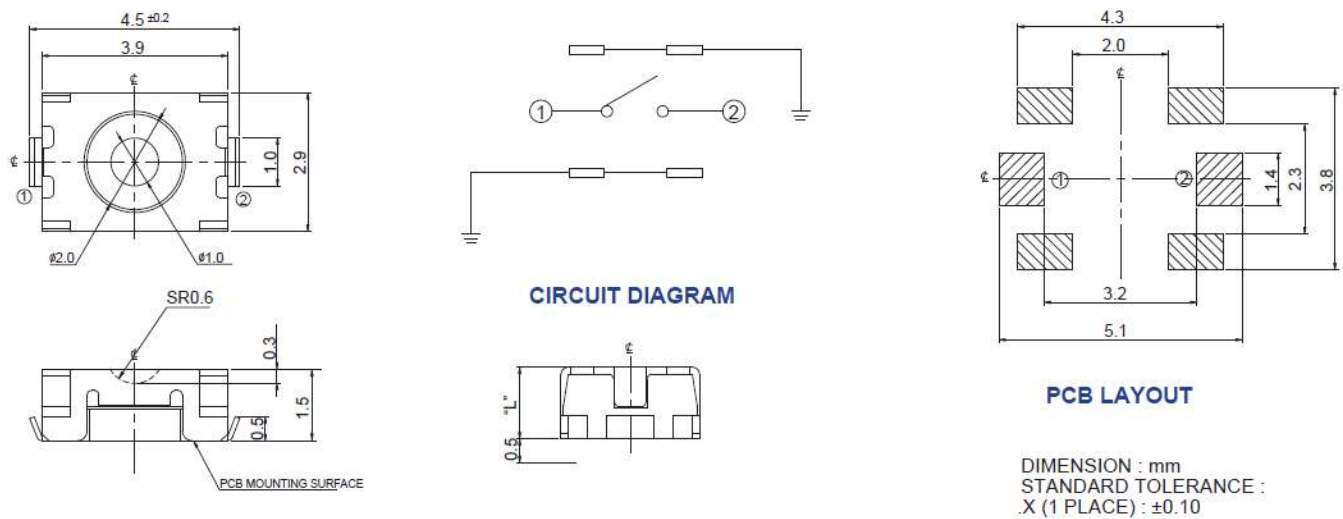


Packing: Tape and Reel

Surface Mount J Bend, Flush/Medium Actuator


The packing specifications :

Structure and materials :

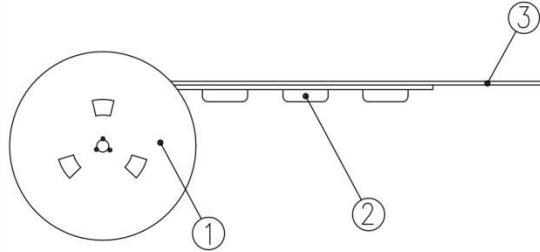

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


1. Packing quantity : 2,500 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481.
7. Dimensions :

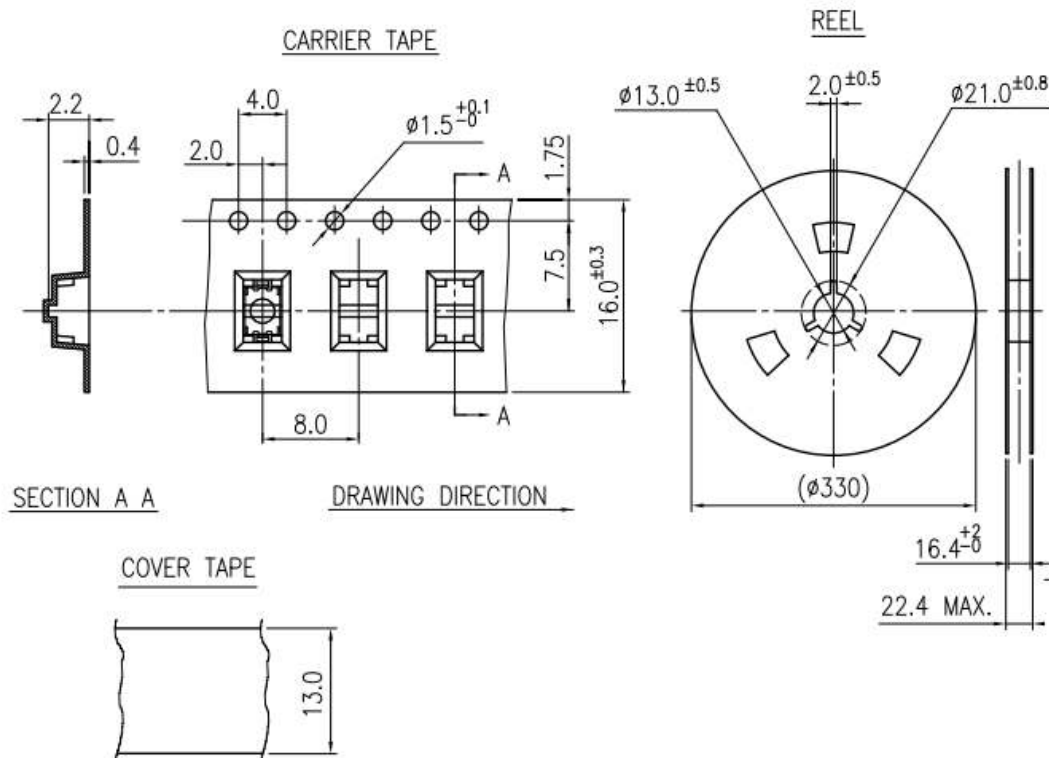

Surface Mount J Bend, Long Actuator

The packing specifications :

Structure and materials :

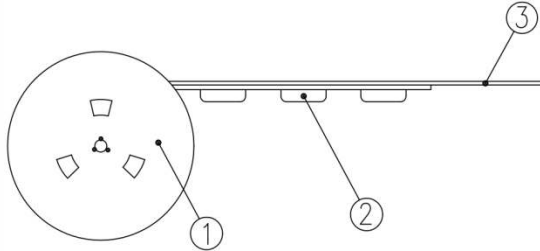

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

1. Packing quantity : 2,300 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but no more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481
7. Dimensions :

