



-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-MCFGT-4IN (4 INCHES)
 CB1.37-IPX4LLK-MCFGT-10IN (10 INCHES)

| REVISIONS | | | | |
|-----------|-----|--------------------|-----------|------------|
| REV | ECR | DESCRIPTION | DRAWN | DATE |
| 1 | | PRODUCTION RELEASE | M. LARSEN | 06/07/2022 |

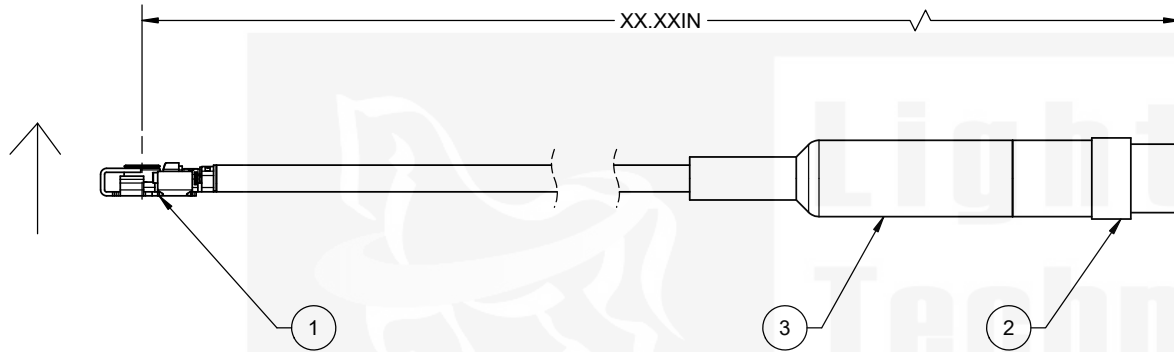

SCALE: NONE

| ITEM | PART NUMBER | DESCRIPTION | QTY |
|------|----------------------|---|-----|
| 1 | CB1.37-IPX4LLK-500MM | IPX4LLK (MHF4L LK) LOCKING, RHT ANGLE, JACK, USING 1.37 CABLE, BLACK, (I-PEX 20632-001R-37) | 0.5 |
| 2 | MCSF11GT-316 | MMCX, STRAIGHT, JACK, CABLE CRIMP | 1 |
| 3 | 1635F-1/8" | .125 (1/8) DIA, .75 LENGTH, GREEN | 1 |

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

| | | | | |
|---|--|------------|--|--------------|
| DO NOT SCALE DRAWING | | | Lighthouse Technologies San Diego, CA WWW.FPCCONNECTOR.COM | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30° | | | TITLE: CABLE ASSEMBLY, IPX4LLK (MHF4L LK), LOCKING, R/A JACK, CRIMP TO MMCX, JACK, CRIMP USING 1.37 MICRO COAX | |
| CUSTOMER APPROVAL SIGN / DATE: | | | SIZE | REV |
| ENG APPR. P. BURDGE CHECKED M. HELD DRAWN M. LARSEN NAME DATE | 06/07/2022 06/07/2022 06/07/2022 | | B CB1.37-IPX4LLK-MCFGT-xxIN | A |
| | | SCALE: 4:1 | FILE NAME | SHEET 1 OF 1 |

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

