



# SPECIFICATION FOR ULTRASONIC SENSOR

TOTAL PAGE	10	<a href="http://www.bestarsensor.com">www.bestarsensor.com</a>	ROHS
------------	----	--	------

Customer		Model Name	BPU1458IFAH09
Customer P/N		Product No.	101901
Date	20. Dec. 2012	Issue No.	BS/TEU01.306B
Page	01 of 10	Issue Date	2012/12/20

## Approval:

- 1.Applications
- 2.Features
- 3.Technical terms
- 4.Drawing
- 5.Beam Pattern
- 6.Test Circuit
- 7.Reliability Test
- 8.Notice
- 9.Packing
- 10.History change record

Drawn by	Checked by	Approved by	Customer approved
倪雪晴	邹东平	李红元	

### **BESTAR SENSORTECH CO.,LTD**

Room 706.No.178. YuLong South Road,Zhonglou district,ChangZhou,  
JiangSuProvince,P.R.China

**Tel:** +86 519 88990131 **Fax:** +86 519 88990133

**E-mail:**[li@bestarsensor.com](mailto:li@bestarsensor.com) **<http://www.bestarsensor.com>**

# BPU1458IFAH09



## 1.Applications

This specification covers the water proof type ultrasonic ceramic transducer which are used for ultrasonic ranging and parking sensor of automobile.

## 2.Features

- 2.1) Water proof and dual use
- 2.2) Compact and light weight.
- 2.3) High sensitivity and sound pressure.
- 2.4) Less power consumption.
- 2.5) High reliability



## 3.Technical terms

No.	Item	Unit	Specification
1.	Construction		Water Proof
2.	Using Method		Dual Use
3.	Center Frequency	KHz	58±1
4.	Sound Pressure Level	dB	≥85(30cm/10Vrms )
5.	Sensitivity	dB	≥-90dB/V/ μ bar
6.	Echo Pulse Width	us	≥200( at 1.5m)
7.	Ringing	ms	≤1.6
8.	Capacitance	pF	2000±25% at 1KHz
9.	Directivity	°	110×50deg
10.	Operating Tem.Range	°C	-40 to +85
11.	Storage Tem.Range	°C	-40 to +85
12.	Allowable Input Voltage	Vp-p	160
13.	Housing Material		Aluminum

				Date:	2012.12.20	BPU1458IFAH09	
				Drawn by:	倪雪晴		
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor	
Rev.	Date	Drawn	Note	Approved by:	李红元		
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B	Page:2 of 10
www.bestarsensor.com li@bestarsensor.com							


This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content

# BPU1458IFAH09

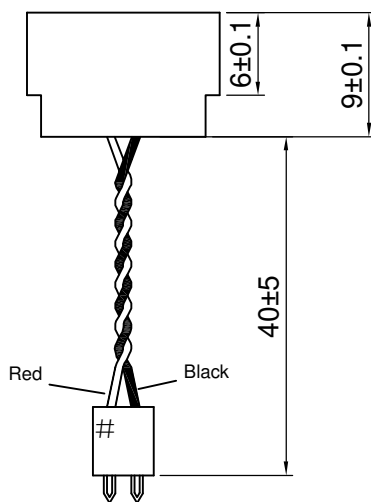

Lead wire  
1571-30# Red,Black  
connector pitch 2mm

# :JAM code





unit:mm

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2012.12.20	BPU1458IFAH09
				Drawn by:	倪雪晴	
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor
Rev.	Date	Drawn	Note	Approved by:	李红元	
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B
www.bestarsensor.com li@bestarsensor.com						Page:3 of 10

# BPU1458IFAH09


## 5.Beam Pattern

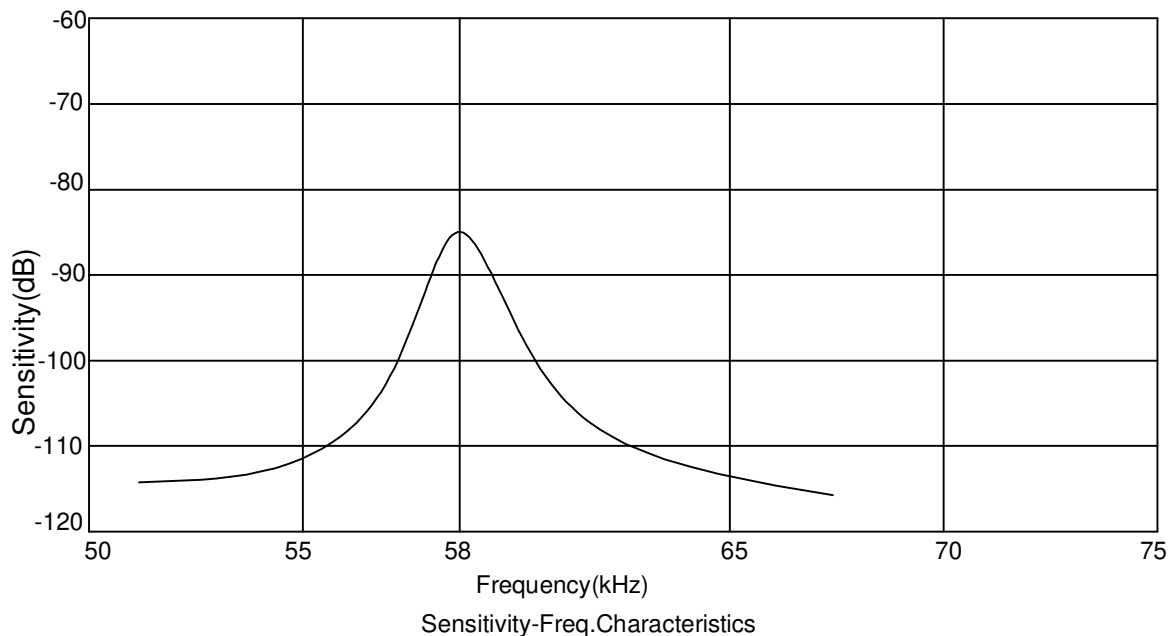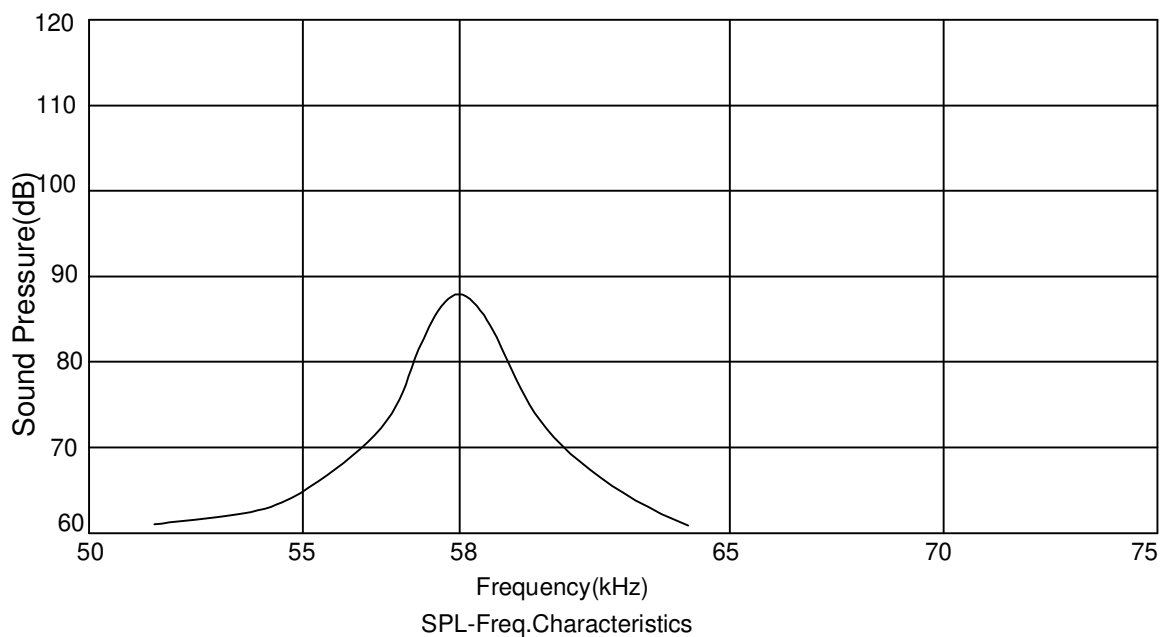

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content.


				Date:	2012.12.20	BPU1458IFAH09	
				Drawn by:	倪雪晴		
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor	
Rev.	Date	Drawn	Note	Approved by:	李红元		
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B	Page:4 of 10
www.bestarsensor.com li@bestarsensor.com							

# BPU1458IFAH09

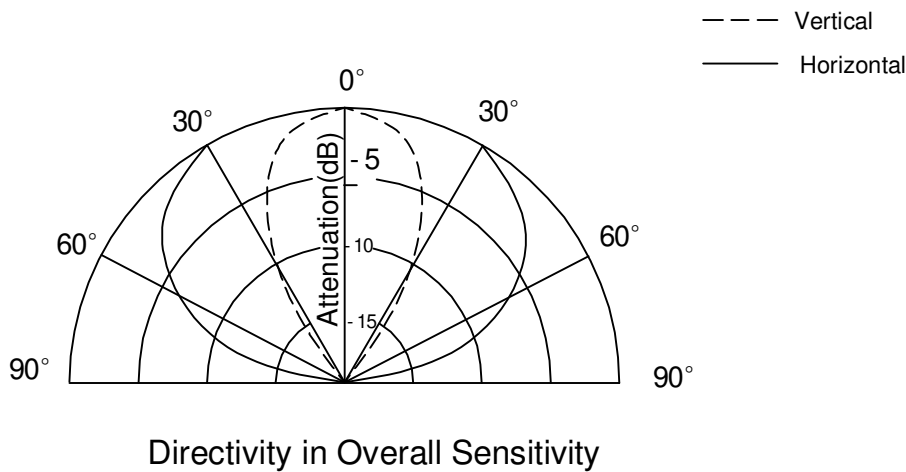

## 6. Test circuit

### Echo&Ringing test circuit

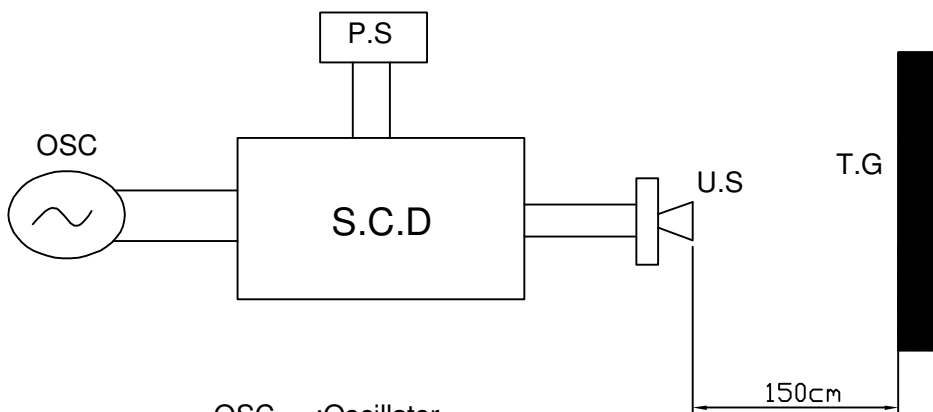


- OSC : Oscillator
- P.S : Power supply
- S.C.D : Special circuit diagram
- U.S : Ultrasonic Sensor
- T.G : Target

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2012.12.20	BPU1458IFAH09	
				Drawn by:	倪雪晴		
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor	
Rev.	Date	Drawn	Note	Approved by:	李红元		
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B	Page:5 of 10
<a href="http://www.bestarsensor.com">www.bestarsensor.com</a> <a href="mailto:li@bestarsensor.com">li@bestarsensor.com</a>							


BPU1458IFAH09

### S.P.L test circuit

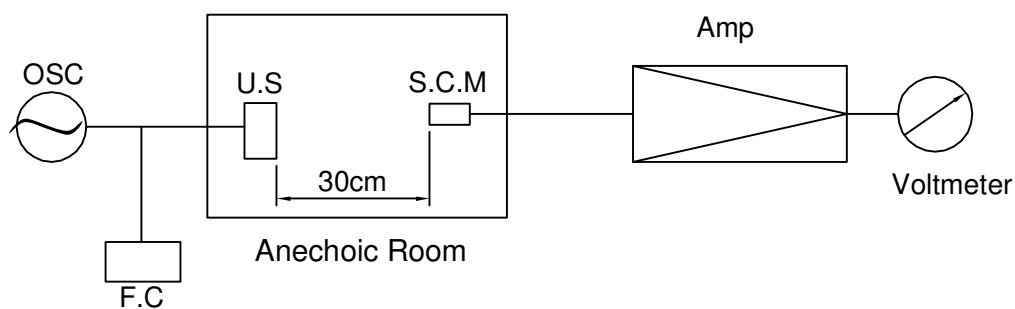

OSC. :Oscillator  
 F.C :Frequency Counter  
 U.S :Ultrasonic Sensor  
 S.C.M:Standard Cappacitor Microphone  
 Amp. :Amplifier

### Sensitivity test circuit

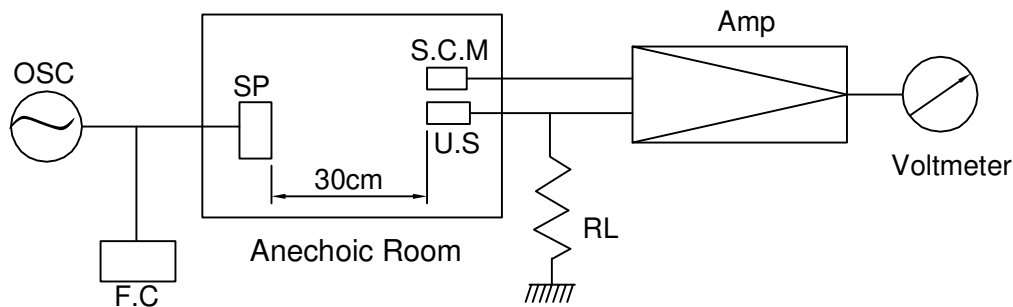

OSC. :Oscillator  
 F.C :Frequency Counter  
 U.S :Ultrasonic Sensor  
 S.C.M:Standard Cappacitor Microphone  
 Amp. :Amplifier  
 SP :Tweeter  
 RL : 3.9K  $\Omega$

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2012.12.20	BPU1458IFAH09
				Drawn by:	倪雪晴	
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor
Rev.	Date	Drawn	Note	Approved by:	李红元	
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B
www.bestarsensor.com li@bestarsensor.com						Page:6 of 10

# BPU1458IFAH09

## 7. Reliability Test

- 7.1 High temp.life test  
 Temperature +85± 3°C  
 Duration 1000hrs
- 7.2 Low temp.life test  
 Temperature -40±3°C  
 Duration 1000hrs
- 7.3 Humidity Test  
 Temperature +85±3°C  
 Relative Humidity (90±5) %  
 Duration 500hrs
- 7.4 Heat Cycle Test Resistance  
 Temperature +85±3°C 30min  
 -40±3°C 30min  
 Cycles 3000cycles  
 ( Sensor paralleled resistance 3.9 Kohm. Temperature conversion T<5min.)
- 7.5 Vibration Test  
 Vibration Frequency 10~200Hz  
 Sweep Period 15min  
 Acceleration 43.12m/s<sup>2</sup> (4.4G)  
 Direction 3(x.y&z)  
 Time 96hours/direction
- 7.6 Shock test  
 Acceleration sine 980 m/s<sup>2</sup> (100G)  
 Direction 3 (x.y&z)  
 Shock times 3 times/direction
- 7.7 Drop test  
 Height 1m onto concrete floor  
 Times 10 times
- 7.8 Pull Strength  
 Tensile strength 10N  
 (Duration time:10S , 2 PIN tensile strength)
- 7.9 Connector soldering check:  
 Immersing terminal up to 1mm below base in soldering bath at 260 °C 10 seconds

**Notice:**

The variation of the S.P.L is within 3dB and other parameters are within 30% at 58 kHz, for 24 hours at 25°C after above test condition, compared with initial figures.

				Date:	2012.12.20	BPU1458IFAH09	
				Drawn by:	倪雪晴		
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor	
Rev.	Date	Drawn	Note	Approved by:	李红元		
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B	Page:7 of 10
www.bestarsensor.com li@bestarsensor.com							

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written content

# BPU1458IFAH09

## 8. Notice

### 8.1 Export Control <For customers outside The People's Republic of China>

No BeStar products should be used or sold, through any channel, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

8.2 Please contact our sales representatives or product engineers before using the products in the specification or catalogue for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this specification.

- a) Aircraft equipment or Aerospace equipment
- b) Undersea equipment and Power plant equipment
- c) Medical equipment and Transportation equipment (vehicles, trains, ships, etc.)
- d) Traffic signal equipment i Disaster prevention / crime prevention equipment
- e) Data-processing equipment including Application of similar complexity and/or reliability requirements to the applications listed above

8.3 Product specifications and catalogues are subject to change and our products in them may be discontinued without advance notice.

Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.

8.4 Please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in this specifications in order to prevent smoking and/or burning, etc.

8.5 Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our specifications and catalogues. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

8.6 No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.


This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written consent.

				Date:	2012.12.20	BPU1458IFAH09	
				Drawn by:	倪雪晴		
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor	
Rev.	Date	Drawn	Note	Approved by:	李红元		
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B	Page:8 of 10
www.bestarsensor.com li@bestarsensor.com							



# BPU1458IFAH09

## 9.Packing

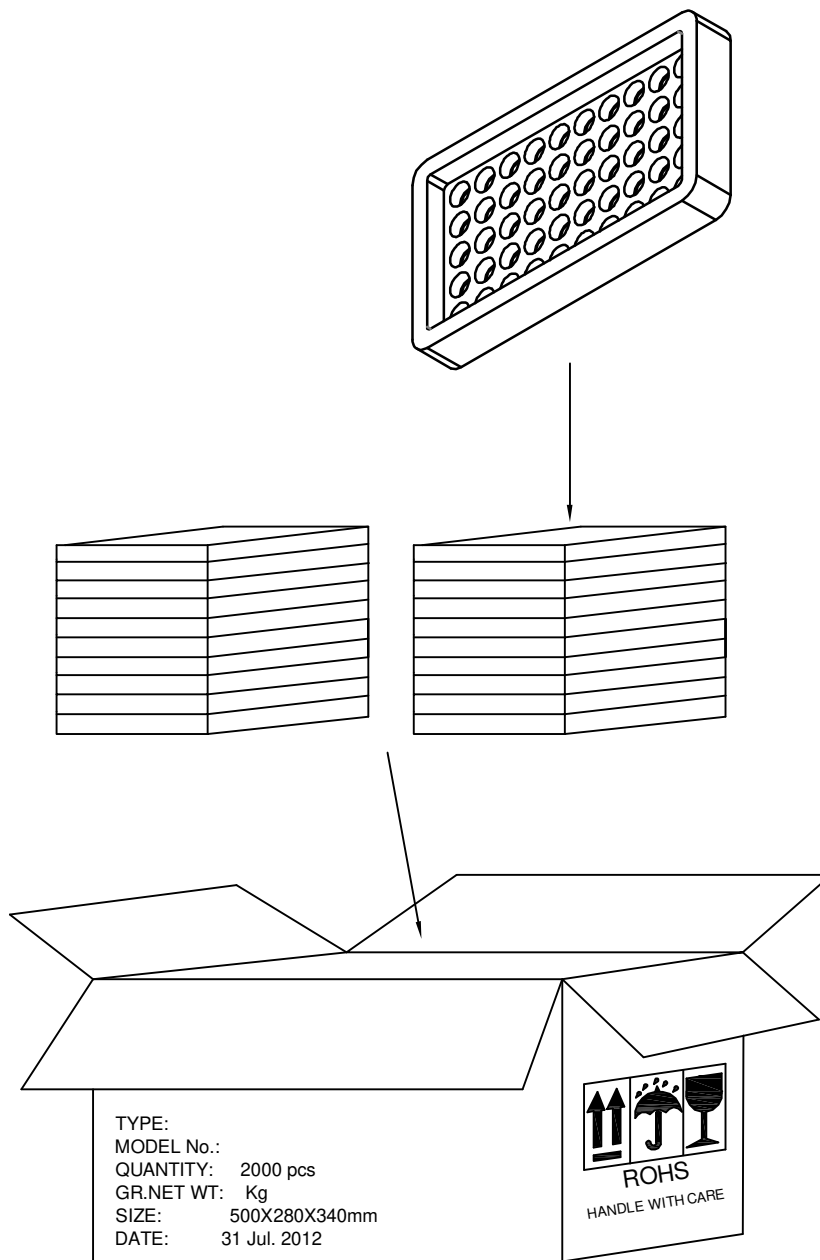

- 1)50 pcs/tray
- 2)40 trays/carton
- 3)2000 pcs/carton in total
- 4)carton size: 500X280X340m m

				Date:	2012.12.20	BPU1458IFAH09
				Drawn by:	倪雪晴	
B	2012.12.20	倪雪晴		Checked by:	邹东平	Ultrasonic Sensor
Rev.	Date	Drawn	Note	Approved by:	李红元	
BESTAR SENSORTECH CO.,LTD						DRG NO: BS/TEU01.306B
www.bestarsensor.com li@bestarsensor.com						Page:9 of 10

This print and information there in are proprietary to Bestar Sensortech Co., Ltd. and shall not be used in whole or in part without its written consent.

