
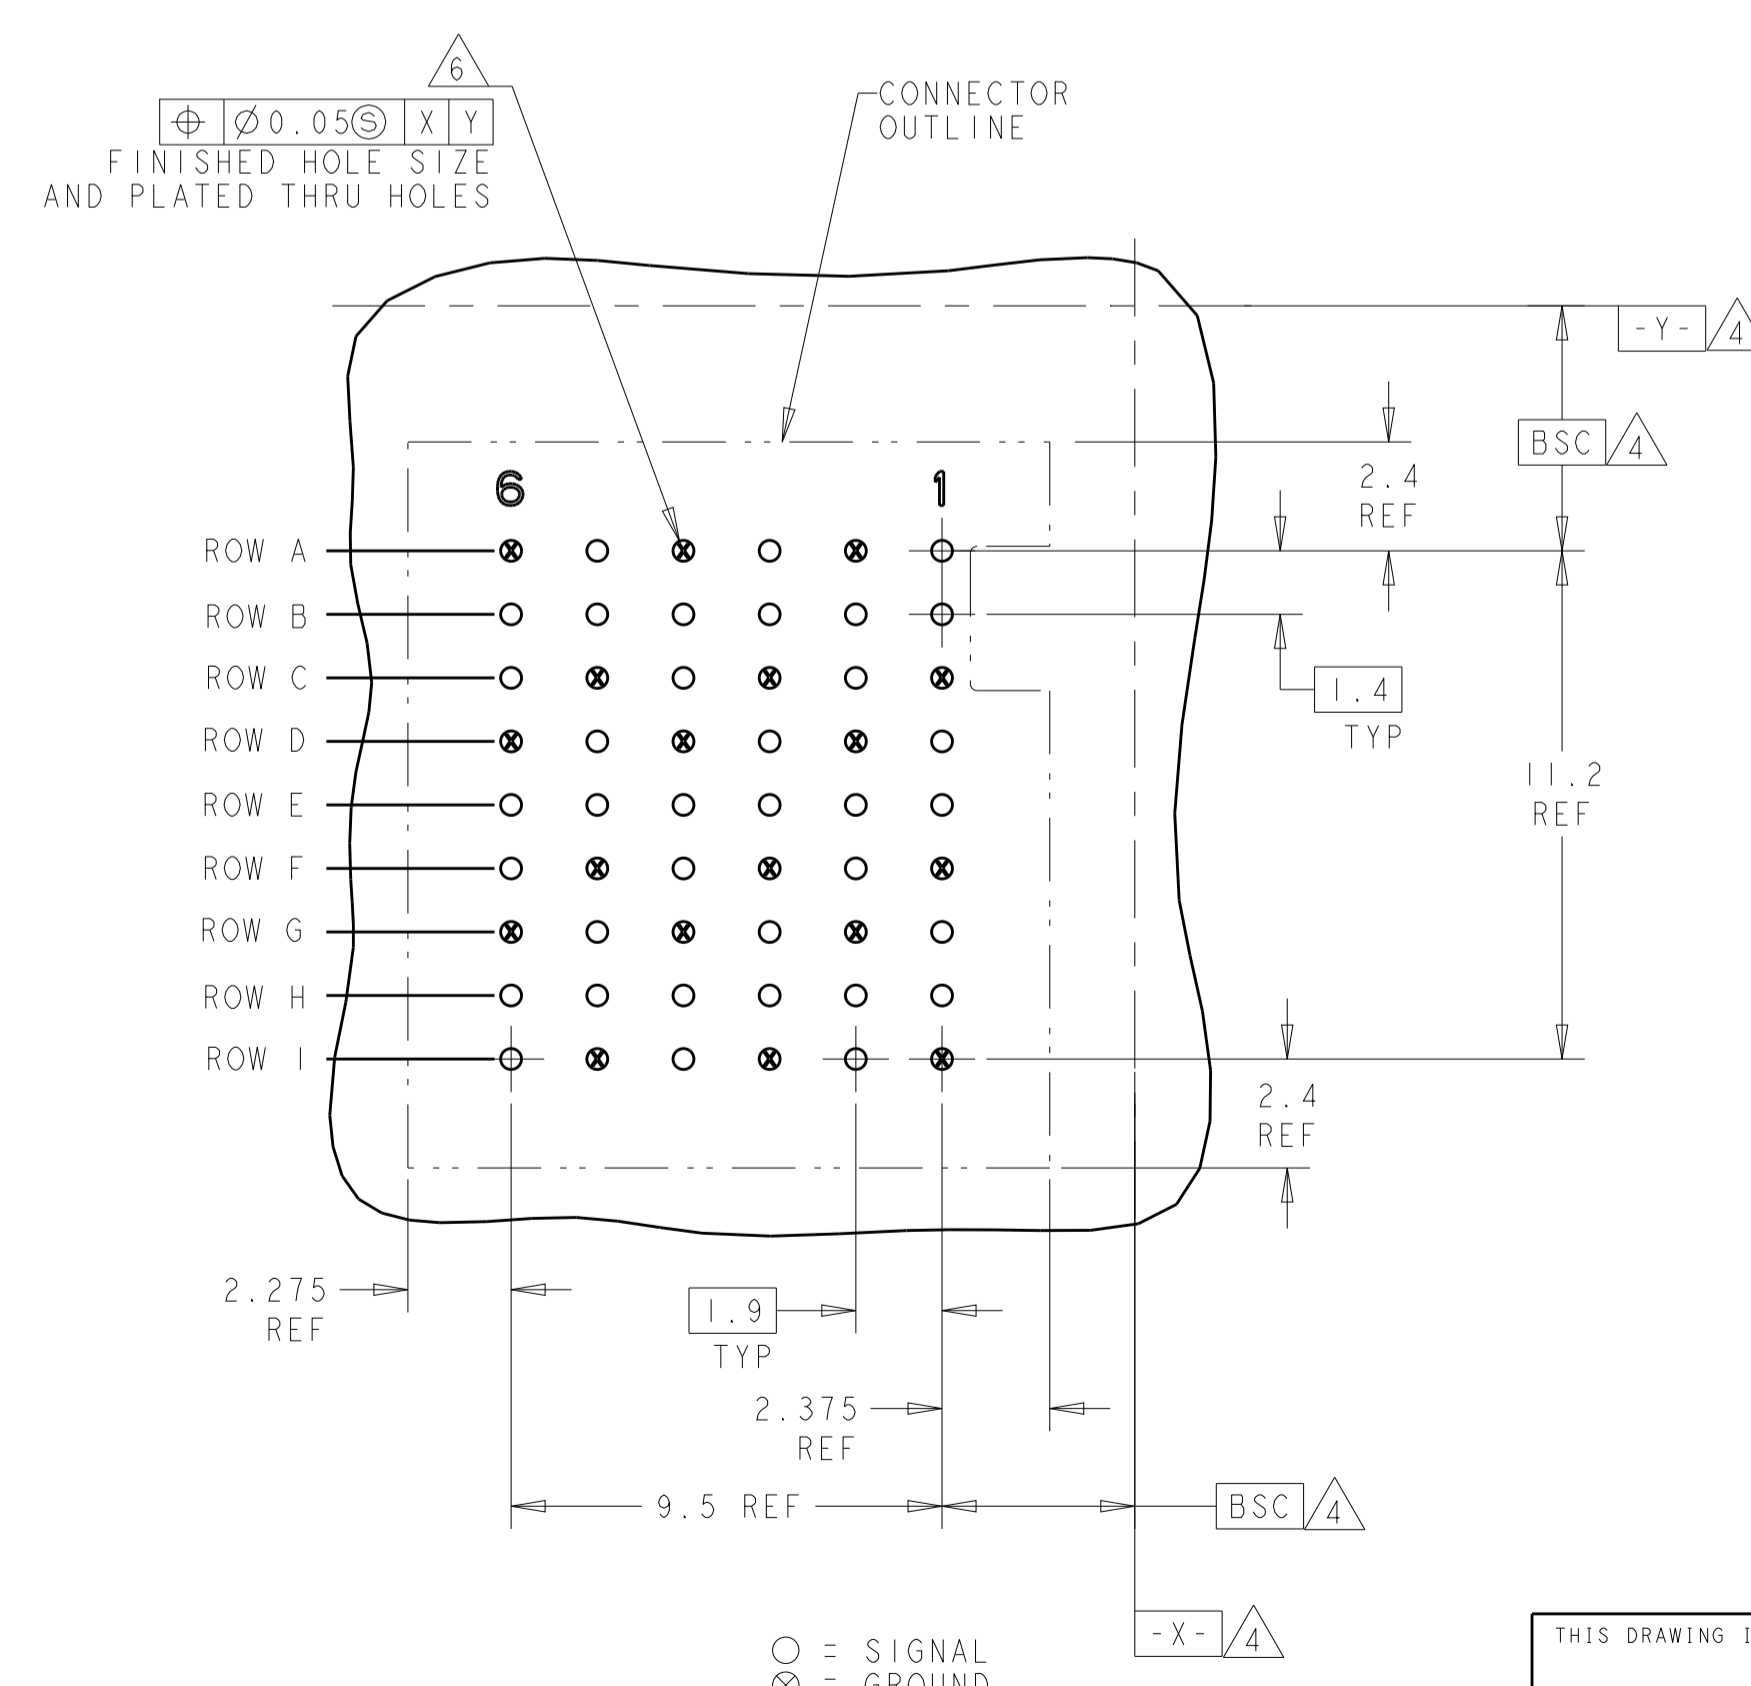
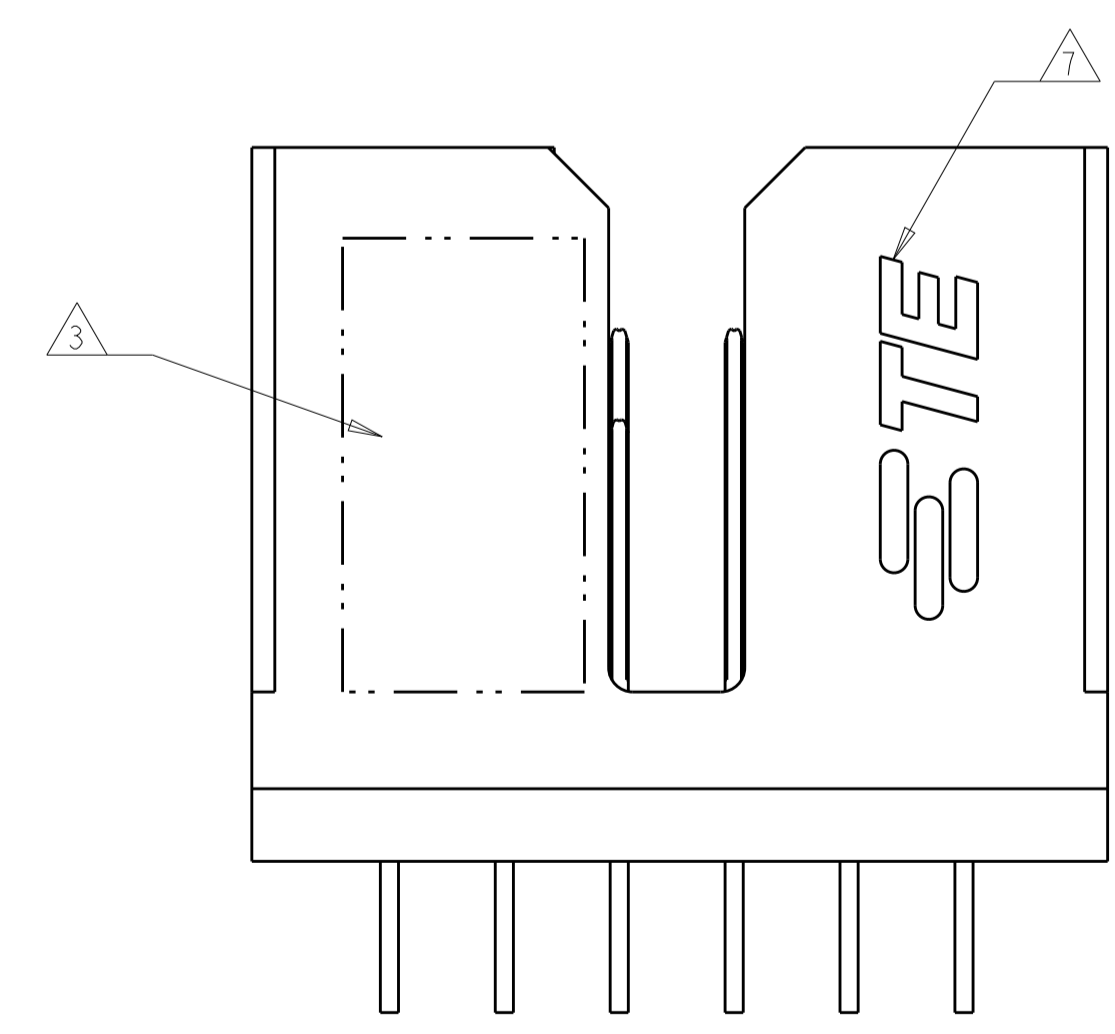
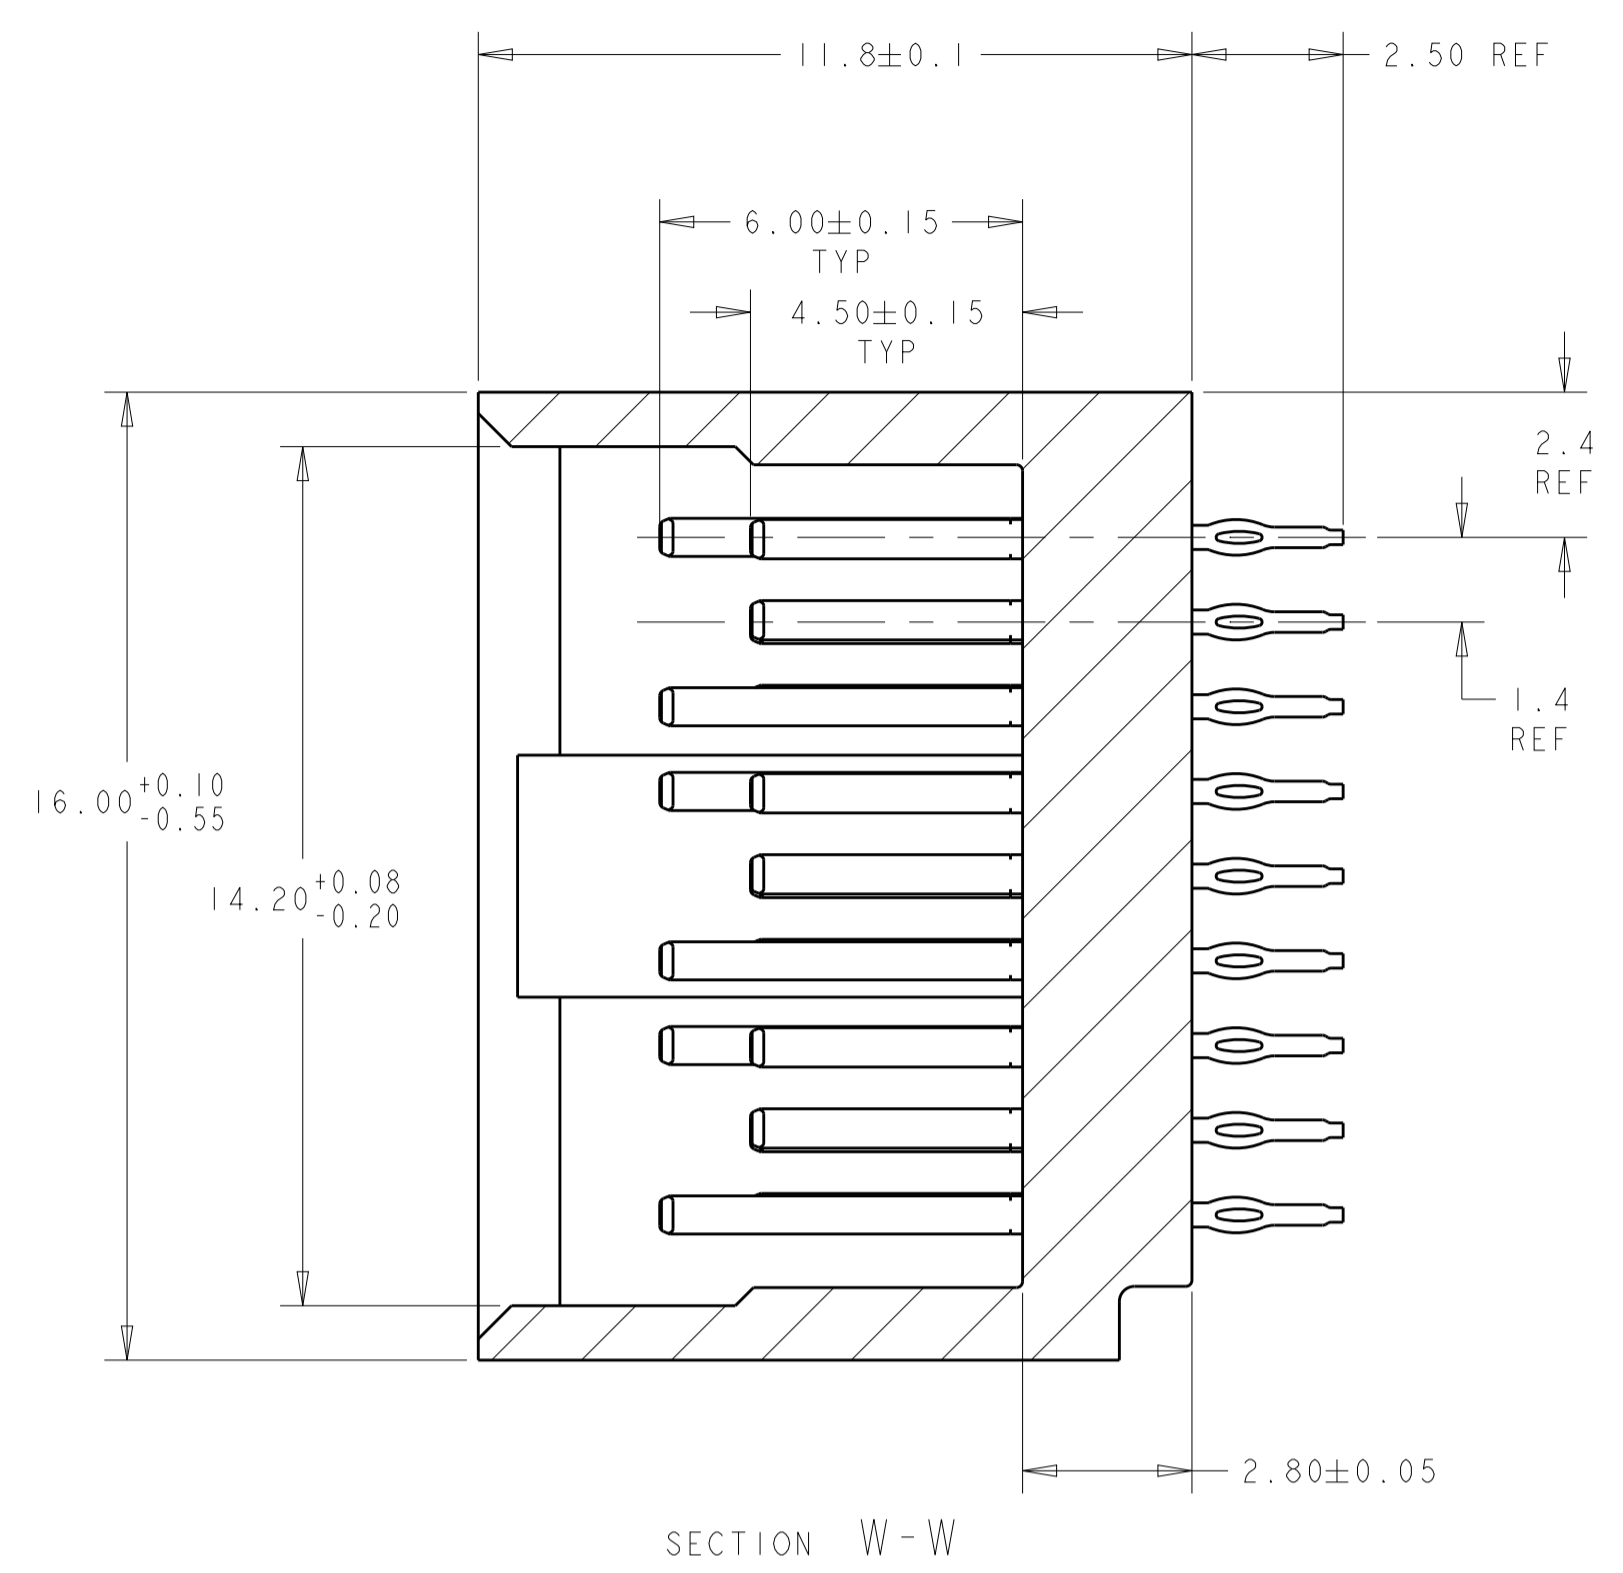
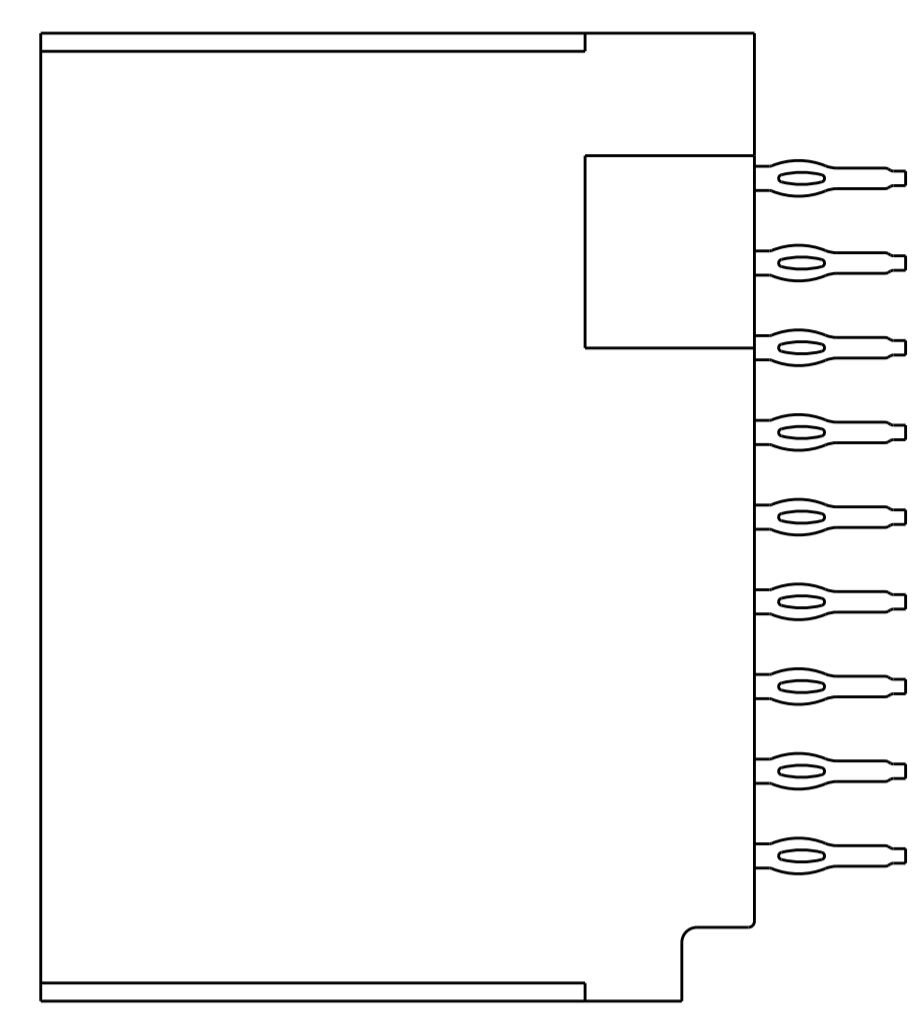


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|---------------------------|-----------|-----------|------|--|--|
| P | LTN | DESCRIPTION | DATE | DMN | APVD | | |
| D | | REVISED PER ECO-13-010626 | 31JUL2013 | KH | RP | | |
| E | | REVISED PER ECO-19-012987 | 26AUG2019 | AP | SY | | |

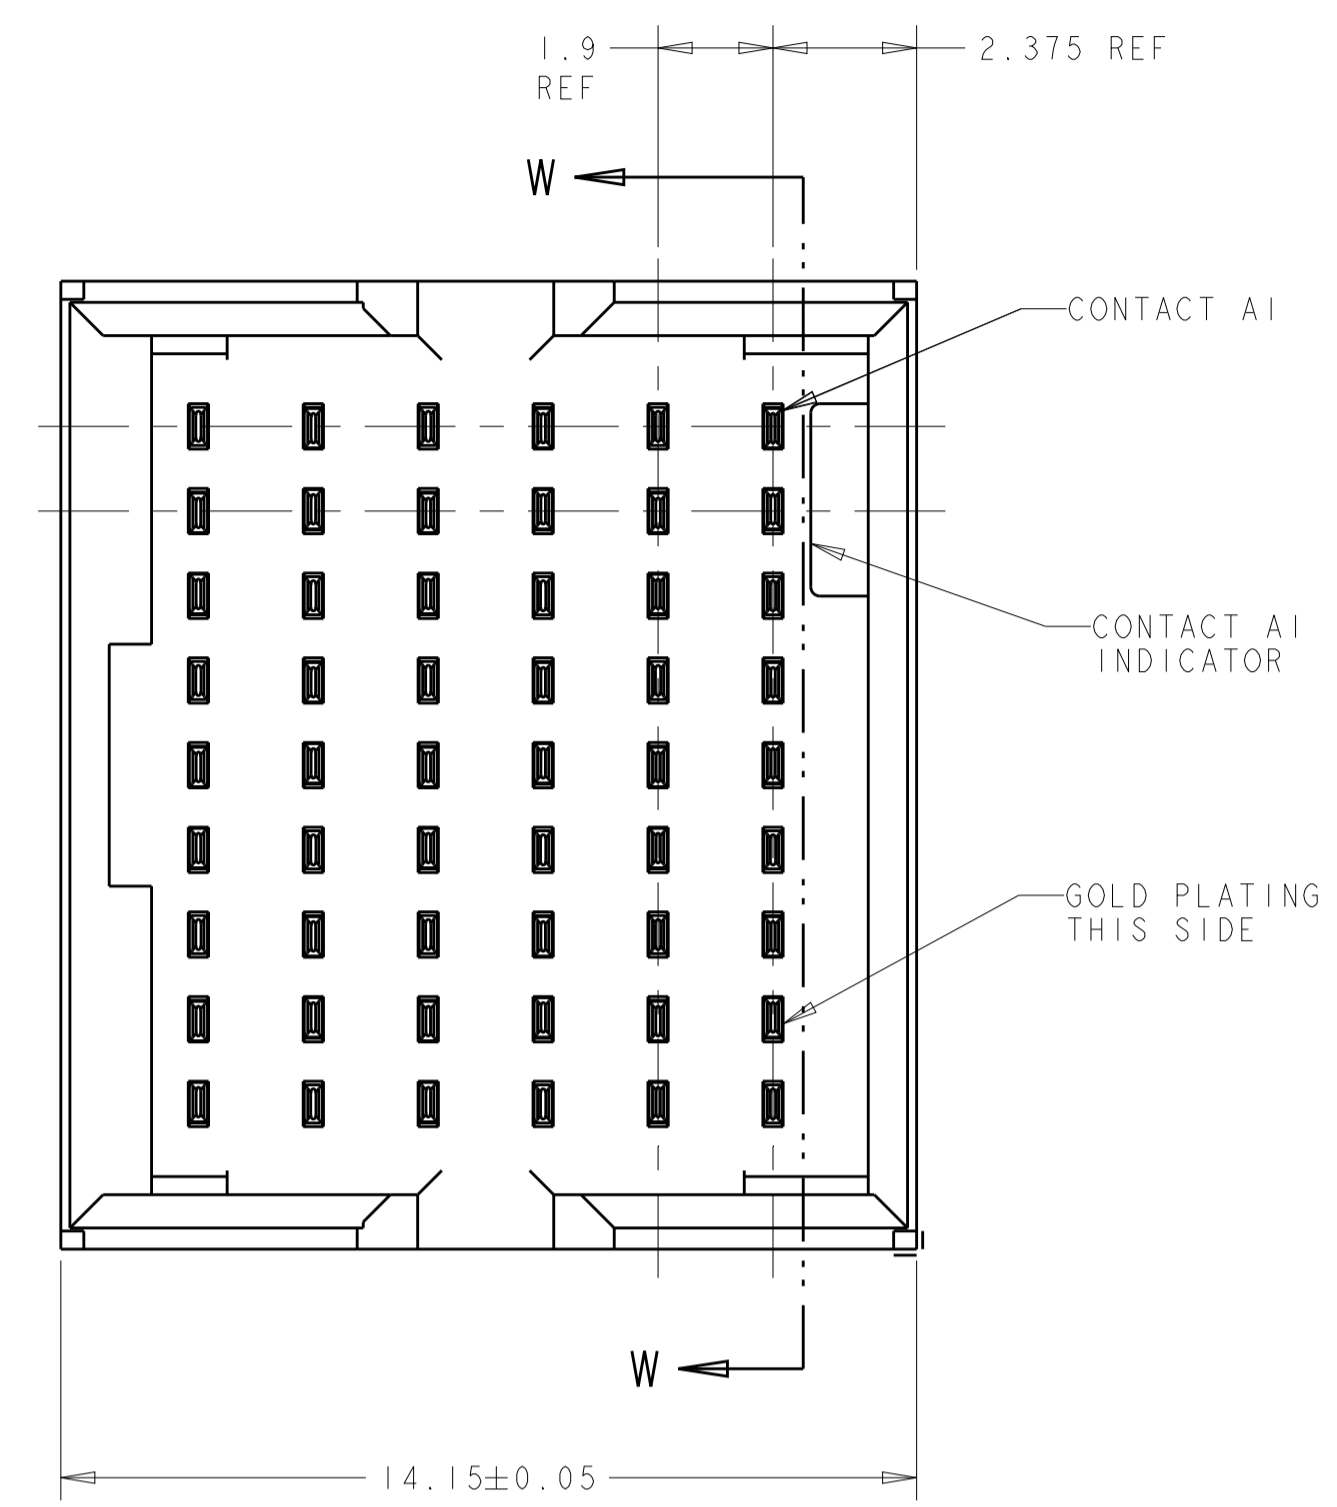

- 1 MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE). COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT, TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 7 SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIMATE AREA

○ = SIGNAL
 ⊗ = GROUND
 RECOMMENDED PCB BOARD LAYOUT BACKPLANE, COMPONENT SIDE SHOWN
 SCALE 6:1

| | | | |
|---|--|-----------------------------|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DMN S. MAGARO 07JUN2007 | TE Connectivity |
| DIMENSIONS: mm | | CHK W. DAVIS 07JUN2007 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD B. PATTERSON 20AUG2008 | NAME: HEADER ASSEMBLY, DOUBLE ENDED, 3 PAIR, 6 COLUMN TinMan |
| 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± | | PRODUCT SPEC | |
| MATERIAL | | WEIGHT | RESTRICTED TO |
| FINISH | | SIZE CAGE CODE DRAWING NO | SCALE 8:1 SHEET 1 OF 1 REV E |
| CUSTOMER DRAWING | | A100779C=1934338 | |

1934338-1
 PART NUMBER