
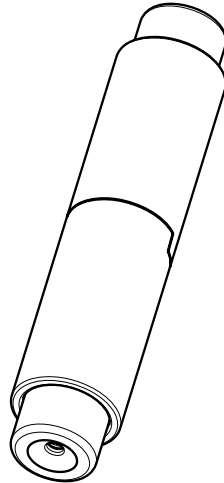
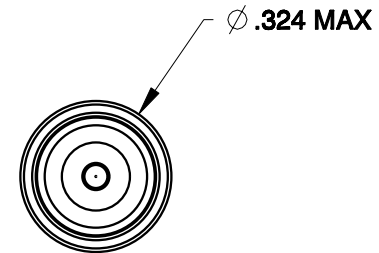


REV	ECN	APP'D
-	4679	JT 12/20/01
A	5793	

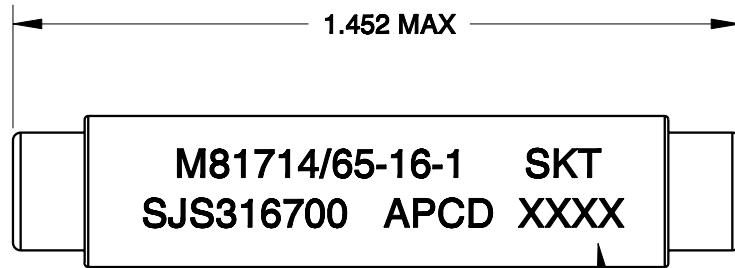

SCALE 2:1

NOTES:

- MATERIALS:**
INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205
WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588
- PART ACCEPTS M39029/22-193 SOCKET CONTACTS - PER TABLE.
- OPERATING RANGE:**
TEMPERATURE: -65° C TO 200° C
INSULATION RESISTANCE: 5000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL
200 VRMS, 100,000 FT ALTITUDE

CURRENT RATING: 13 AMPS
VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

PART NO.	DESCRIPTION	P/N MARKING
SJS316600	CONTACTS NOT SUPPLIED	SJS316700
SJS316700	QTY 2, M39029/22-193 INCLUDED	

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	<h1>Amphenol Pcd</h1> <p>SPECIFICATION DRAWING</p>		TITLE SJS WIRE SPLICE SINGLE, SIZE 16		
			ENGR S. HORNER	12/17/01	SIZE A	DWG NO. SJS316700	REV A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA			CHKD		CODE: 58982	SCALE: 8:3	SHEET 1 OF 1
			APPD				