
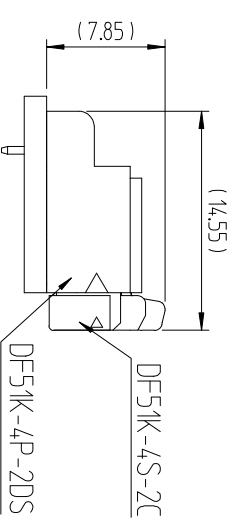

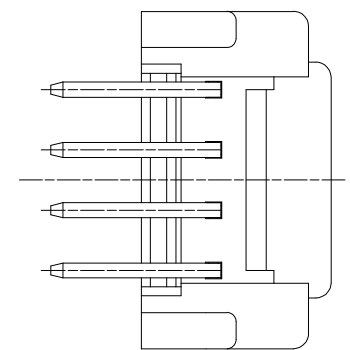
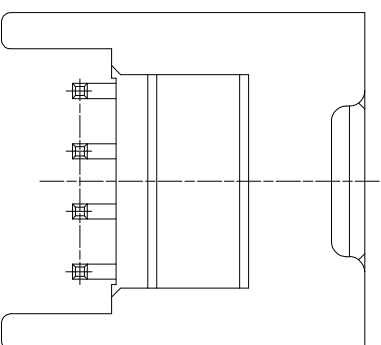
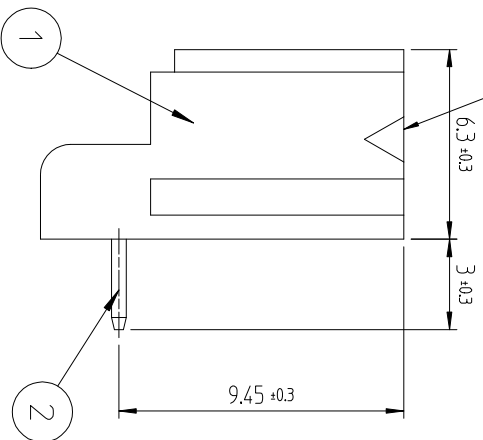
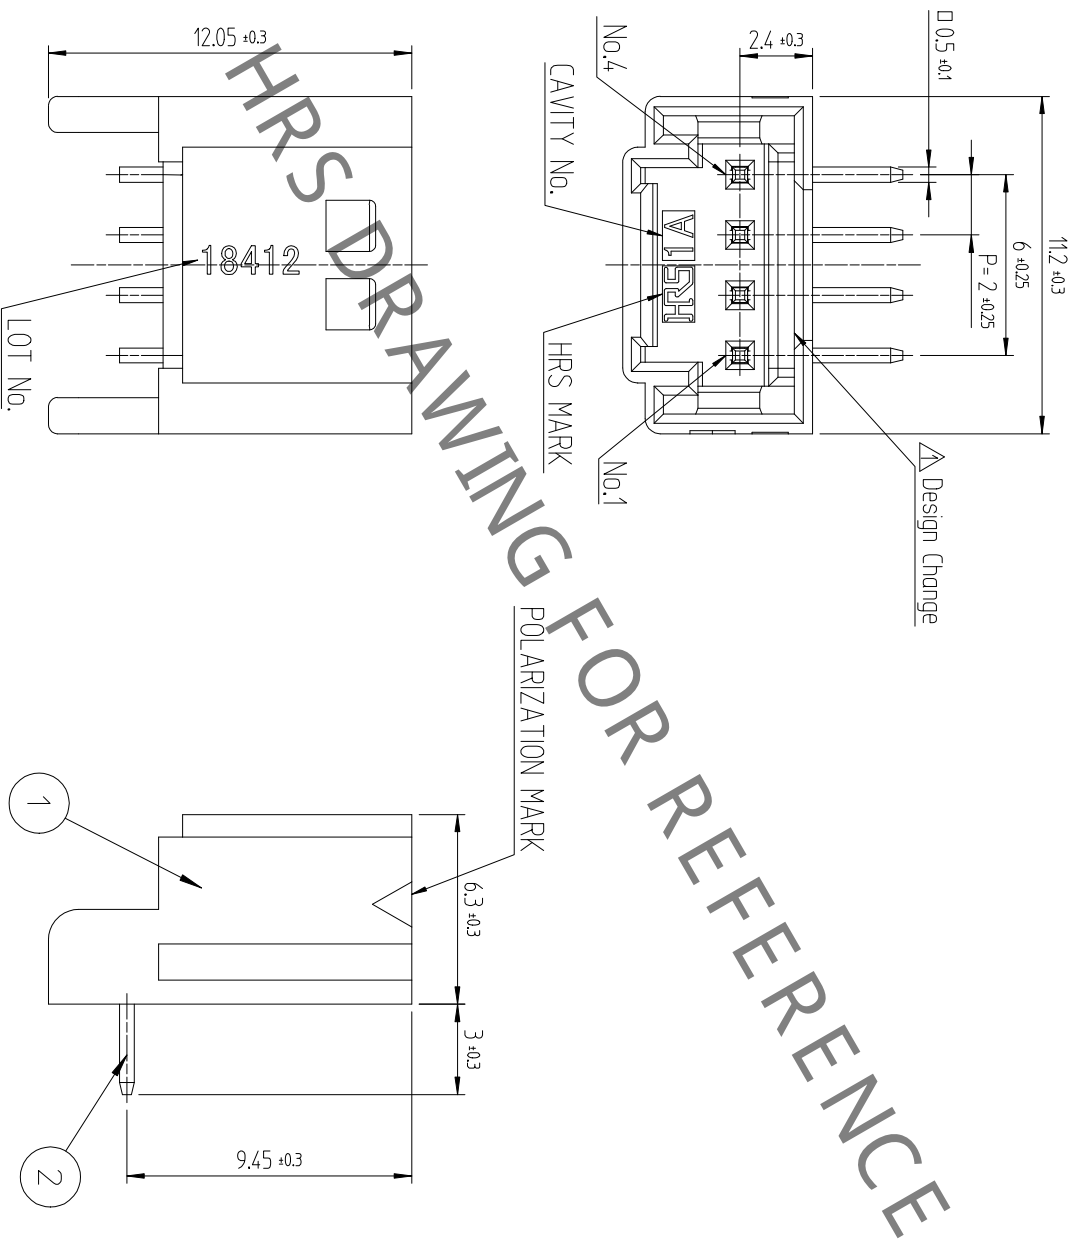


△数 COUNT	訂正事項 DESCRIPTION OF REVISIONS	檢圖 CHKD	年月日 DATE	△数 COUNT	訂正事項 DESCRIPTION OF REVISIONS	檢圖 CHKD	年月日 DATE
1	RE-6-1150	K.I.Y	18. 07. 04				
2	RE-6-1579	K.I.Y	20. 01. 23				

RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)



ENGAGEMENT FIGURE (2:1)

NOTE 1. 1PACK CONTAINS 270PCS.

2. () DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(UL File No. E132750) AUTHORIZATION ARTICLE.

C-UL(UL File No. E132750) AUTHORIZATION ARTICLE.



1	PBT	UL94V-0, BLACK	2	BRASS	TIN PLATING 1μm MIN, OVER NICKEL 0.5μm MIN
NO.	MATERIAL	FINISH/REMARKS	NO.	MATERIAL	FINISH/REMARKS
CODE NO. (OLD)		DRAWN	CHECKED		APPROVED
		CHOI 18.03.02 J.S	LIM 18.03.02 S.M		KANG 18.03.02 T.S
SCALE 4:1		DESIGNED		RELEASED	
UNITS mm		CHOI 18.03.02 J.S		ENG 20.02.12 DEPT	
DRAWING NO. EDC3-632473			PART NO. DF51K-4P-2DS (800)		
HRS HIROSE KOREA CO.,LTD.			CODE NO. CL 6652-0061-3-800		

F 1 2 3 4 5 6 7 8