

TN-5816A/5818A Series

EN 50155 16/16+2G-port layer 3 Gigabit managed Ethernet switches



- > Layer 3 routing interconnects multiple LAN segments
- > 4 Fast Ethernet ports and 2 optional Gigabit ports with bypass relay function
- > Isolated power with 24 to 110 VDC power supply range
- > Essential compliance with EN 50155*
- > -40 to 75°C operating temperature range
- > Turbo Ring and Turbo Chain (recovery time < 20 ms with 250 switches), and STP/RSTP/MSTP for network redundancy

*Moxa defines "essential compliance" to include those EN 50155 requirements that make products more suitable for rolling stock railway applications.



Introduction

The ToughNet TN-5816A/5818A switches are high performance M12 Layer 3 Ethernet switches that support Layer 3 routing to facilitate the deployment of applications across networks. By using M12 and other circular connectors, the TN-5816A/5818A series ensures tight, robust connections and guarantees reliable resilience against environmental disturbances, such as vibration and shock. TN-5816A/5818A switches provide isolated power with 24 to 110 VDC power input range, which allows you to use the same model at different sites around the globe. In addition, TN-5816A/5818A switches provide up to 16 Fast Ethernet

M12 ports with 4 bypass relay ports, and 2 Gigabit Ethernet ports with bypass relay function. Furthermore, the -40 to 75°C operating temperature and IP54-rated waterproof enclosure allow deployment in harsh environments. The TN-5816A/5818A series Ethernet switches are compliant with essential sections of EN 50155, covering operating temperature, power input voltage, surge, ESD, and vibration, as well as conformal coating and power insulation, making the switches suitable for a variety of industrial applications.

Features and Benefits

- Layer 3 switching functionality to divide a large network into hierarchical subnets and allow data and information to communicate across networks
- Leading EN 50155-compliant L3 Ethernet switches for rolling stock applications
- DHCP Option 82 for IP address assignment with different policies
- Turbo Ring, Turbo Chain, and STP/RSTP/MSTP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN, and GVRP to ease network planning
- EtherNet/IP and Modbus/TCP industrial Ethernet protocols supported
- QoS (IEEE 802.1p/1Q and ToS/DiffServ) allows real-time traffic classification and prioritization
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port allows access by only authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email, relay output
- Line-swap fast recovery
- LLDP for automatic topology discovery in network management software
- Configurable by web browser, Telnet/serial console, and Windows utility
- Panel mounting or DIN-rail mounting installation capability
- Loop protection to prevent network loops

Specifications

Technology

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X)
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3x for Flow Control
- IEEE 802.1D-2004 for Spanning Tree Protocol
- IEEE 802.1w for Rapid Spanning Tree Protocol
- IEEE 802.1s for Multiple Spanning Tree Protocol
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service

IEEE 802.1X for Authentication

IEEE 802.3ad for Port Trunk with LACP

Protocols: IGMPv1/v2, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, DHCP Option 66/67/82, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, SSH, Syslog, SNMP Inform, LLDP, IEEE 1588 PTP v2, NTP Server/Client, EtherNet/IP, Modbus/TCP

MIB: MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

Flow Control: IEEE 802.3x flow control, back pressure flow control

Layer 3 Switching: Static routing, RIP V1/V2, OSPF, VRRP for routing redundancy

Switch Properties

Priority Queues: 4
Max. Number of Available VLANs: 64
VLAN ID Range: VID 1 to 4094
IGMP Groups: 256

Interface

Fast Ethernet: Front cabling, M12 D-coded 4-pin female connector, 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Gigabit Ethernet: M12 X-coded 8-pin female connectors, 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode, auto MDI/MDI-X connection, with bypass relay function

Console Port: M12 A-coding 5-pin male connector

System LED Indicators: PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/ TAIL

Port LED Indicators: 10/100M (Fast Ethernet port), 10/100/1000M (Gigabit Ethernet port)

Alarm Contact: 2 relay outputs in one M12 A-coding 5-pin male connector with current carrying capacity of 1 A @ 30 VDC

Power Requirements

Dual Power Input Voltage:

- WV: 24 to 110 VDC (16.8 to 137.5 VDC)

Max. Input Current:

- TN-5816ABP Series: 1.1 A @ 24 VDC, 0.23 A @ 110 VDC
- TN-5818A Series: 1.24 A @ 24 VDC, 0.26 A @ 110 VDC

Overload Current Protection: Present

Connection: M23 connector

Reverse Polarity Protection: Present

Physical Characteristics

Housing: Metal, IP54 protection (optional protective caps available for unused ports)

Dimensions:

TN-5816ABP Series: 250 x 175.8 x 115 mm (9.84 x 6.92 x 4.53 in)

TN-5818A Series: 250 x 181.4 x 115 mm (9.84 x 7.14 x 4.53 in)

Weight:

TN-5816ABP Series: 2990 g

TN-5818A Series: 3160 g

Installation: Panel mounting, DIN-rail mounting (with optional kit: DK-DC50131)

Environmental Limits

Operating Temperature: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Altitude: Up to 2000 m

Note: Please contact Moxa if you require products guaranteed to function at higher altitudes

Standards and Certifications

Safety: UL 508 (Pending)

EMI: FCC Part 15 Subpart B Class A, EN 55022 Class A

EMS:

EN 61000-4-2 (ESD) Level 3

EN 61000-4-3 (RS) exceeds Level 3

EN 61000-4-4 (EFT) Level 3

EN 61000-4-5 (Surge) Level 3

EN 61000-4-6 (CS) Level 3

EN 61000-4-8

Rail Traffic: (for panel mounting installations)

EN 50155*

**Moxa defines "essential compliance" to include those EN 50155 requirements that make products more suitable for rolling stock railway applications.*

Shock: IEC 61373

Freefall: IEC 60068-2-32

Vibration: IEC 61373

Note: Please check Moxa's website for the most up-to-date certification status.

Warranty


Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

TN-5816A Series


Unit: mm (inch)

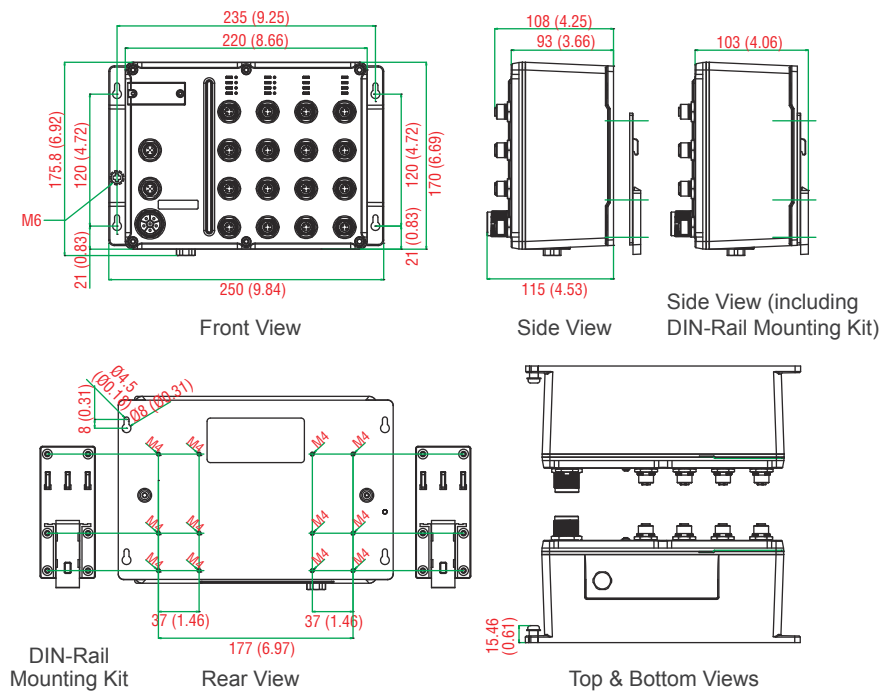

Dimensions

TN-5818A Series

Unit: mm (inch)

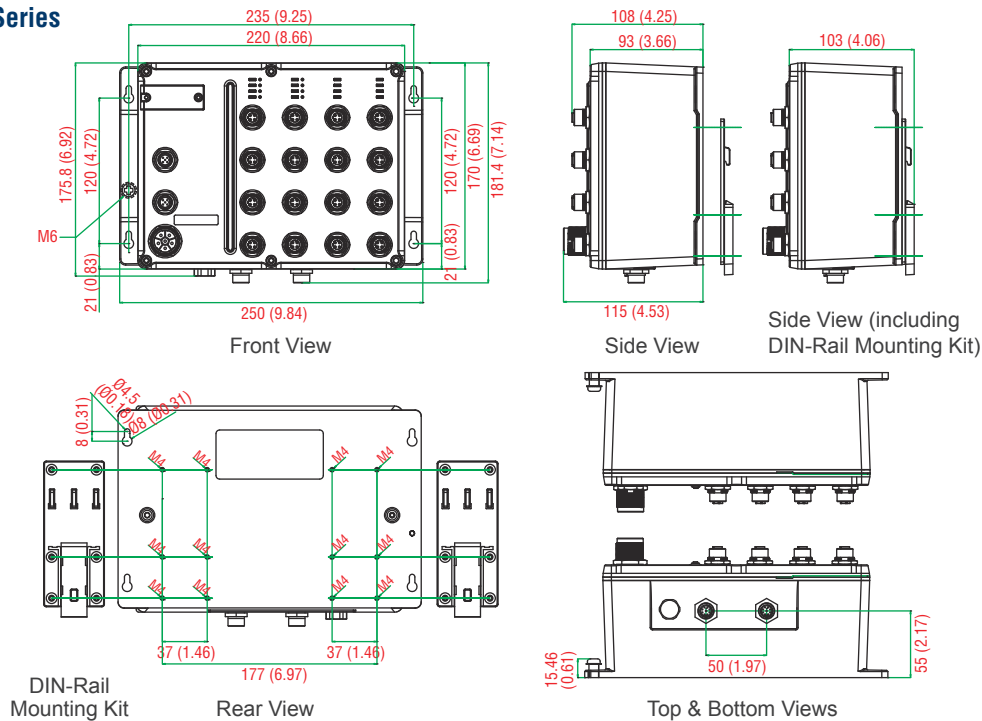

Ordering Information

Available Models	Port Interface			Power Supply	Conformal Coating
	Front Cabling	Down Cabling			
Wide Temperature (-40 to 75°C)	10/100 Base-T(X), M12 connector	10/100 Base-T(X) M12 connector	10/100/1000 Base-T(X) M12 connector, with bypass relay	WV: 24 to 110 VDC (16.8 to 137.5 VDC)	
TN-5816A Series					
TN-5816ABP-WV-T	12	4	–	1	–
TN-5816ABP-WV-CT-T	12	4	–	1	✓
TN-5818A Series					
TN-5818A-2GTXP-WV-T	12	4	2	1	–
TN-5818A-2GTXP-WV-CT-T	12	4	2	1	✓

Definitions:

1. GTXBP: Gigabit Ethernet copper port with bypass relay
2. WV: Wide Voltage
3. CT: Conformal Coating

Note: Conformal coating is available on request.

Optional Accessories (must be purchased separately)

Power Cords, M12/M23 Connectors, Protective Caps: See following page

MXview: Moxa industrial network management software with 50, 100, 250, 500, 1000, or 2000 nodes

EDS-SNMP OPC Server Pro: OPC server software that works with all SNMP devices

ABC-01-M12: Configuration backup and restore tool for TN series managed Ethernet switches, 0 to 60°C operating temperature

Package Checklist

- TN-5816A or TN-5818A series switch
- M12-to-DB9 console port cable
- 2 protective caps for console and relay output ports
- Panel mounting kit
- Documentation and software CD
- Hardware installation guide
- Warranty card

EN 50155 Switch Accessories

: M12/M23 Power Cords

CBL-M12D(MM4P)/RJ45-100 IP67

1-meter M12-to-RJ45 Cat-5C UTP Ethernet cable with IP67-rated 4-pin male D-coded M12 connector



CBL-M12(FF5P)/OPEN-100 IP67

1-meter M12-to-5-pin power cable with IP67-rated 5-pin female A-coded M12 connector



CBL-M23(FF6P)/Open-BK-100 IP67

1-meter M23-to-6-pin power cable with IP67-rated 6-pin female M23 connector



: M12 Connectors

M12D-4P-IP68

Field-installable M12 D-coded screw-in sensor connector, 4-pin male, IP68-rated



M12A-5P-IP68

Field-installable M12 A-coded screw-in sensor connector, 5-pin female, IP68-rated



: M12 IP67 Protective Caps

A-CAP-M12F-M

Metal cap for M12 female connector



A-CAP-M12M-M

Metal cap for M12 male connector



: M23 Connectors

A-PLG-WPM23-01

M23 cable connector, 6-pin female, crimp type

