




specifications

Lens	CRI	Finish	Consumption	Lumen Output	Efficacy	Material	L70 hours	Ambient Temp (F)	Power Factor	UL listing	THD	Dimensions
frosted polycarbonate	>70	white	36 W	4,200	117 lm / W	metal	50,000	-4° - 131°	> 0.9	damp location	<0.2	46.54" (L) 1.85" (H) 4.41" (W)


Part Number	Color Temp	Voltage
GI-4RSL-C100-G4	5000K	120 - 277 V
GI-4RSL-D100-G4	4000K	120 - 277 V

Dimensional Diagram (mm)

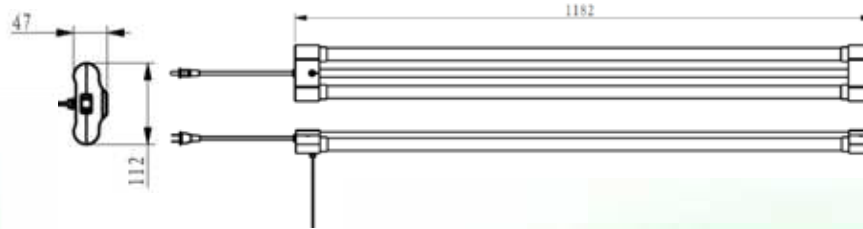

other

Warranty	Case QTY
6 years	1 pc

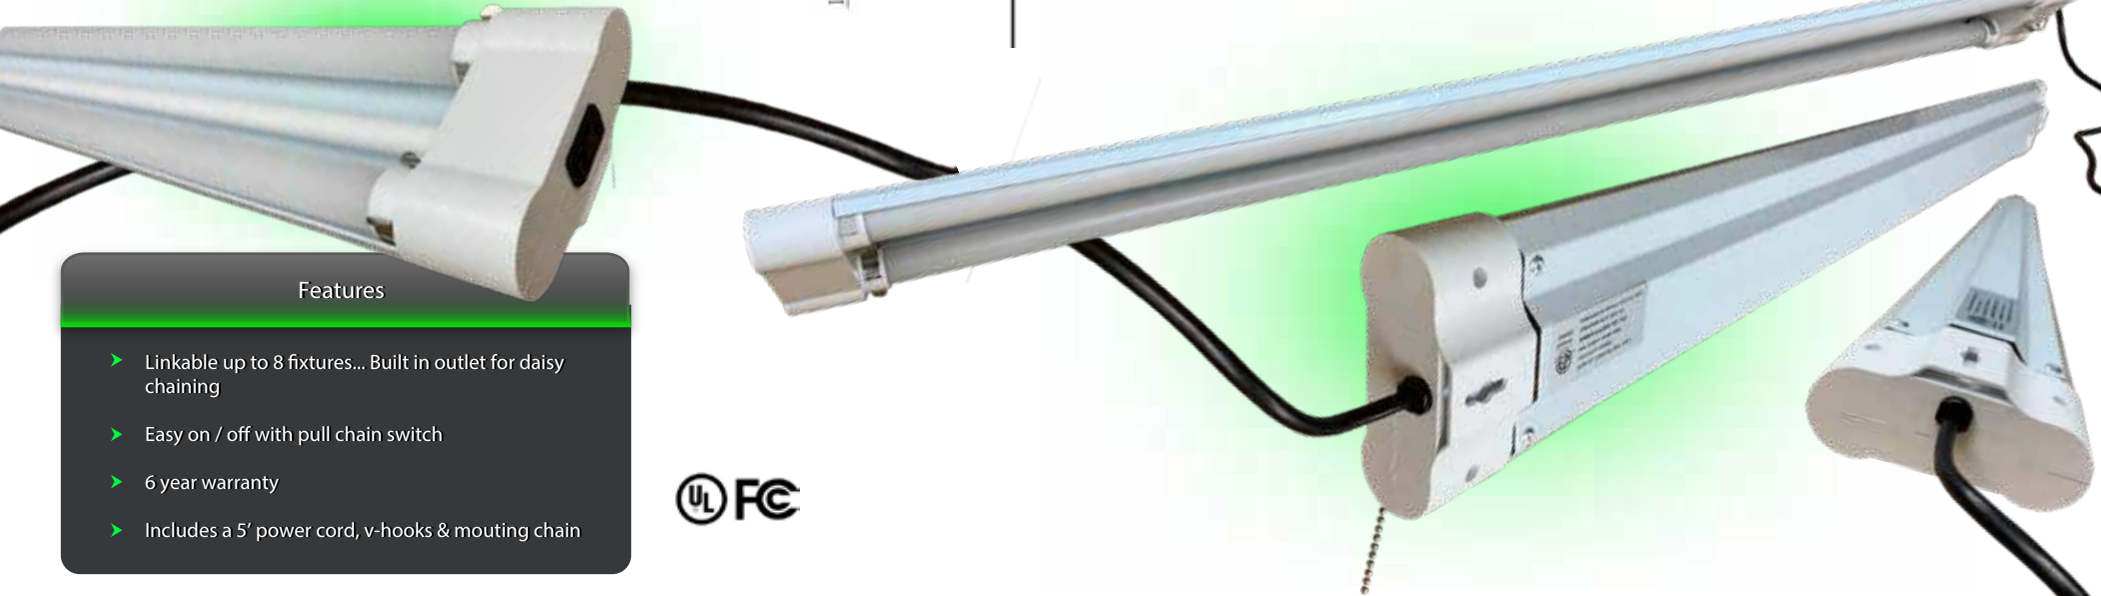

- Features
- ▶ Linkable up to 8 fixtures... Built in outlet for daisy chaining
  - ▶ Easy on / off with pull chain switch
  - ▶ 6 year warranty
  - ▶ Includes a 5' power cord, v-hooks & mouting chain



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

