

AMP | Junior Power Timer TE Internal #: 1-967624-1 Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Gray, Wire & Cable, Signal, Junior Power Timer

View on TE.com >





Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in ]

Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 18

Centerline (Pitch): 5 mm [.197 in ]

All Timer Connector Housing (589)

### Features

### Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals



Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	18
Number of Rows	3
Electrical Characteristics	
Nominal Voltage Architecture	28 V
Body Features	
Primary Product Color	Gray
Connector & Keying Code	A
Contact Features	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Gray, Wire & Cable, Signal, Junior Power Timer



Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	26.5 mm[1.043 in]
Product Length	34.8 mm[1.37 in]

### Usage Conditions

Operating Temperature (Max)	100 °C[212 °F]
Operating Temperature Range	-30 – 100 °C[-22 – 212 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Carton
Other	
Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Gray, Wire & Cable, Signal, Junior Power Timer



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**



## Also in the Series | Junior Power Timer

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Gray, Wire & Cable, Signal, Junior Power Timer



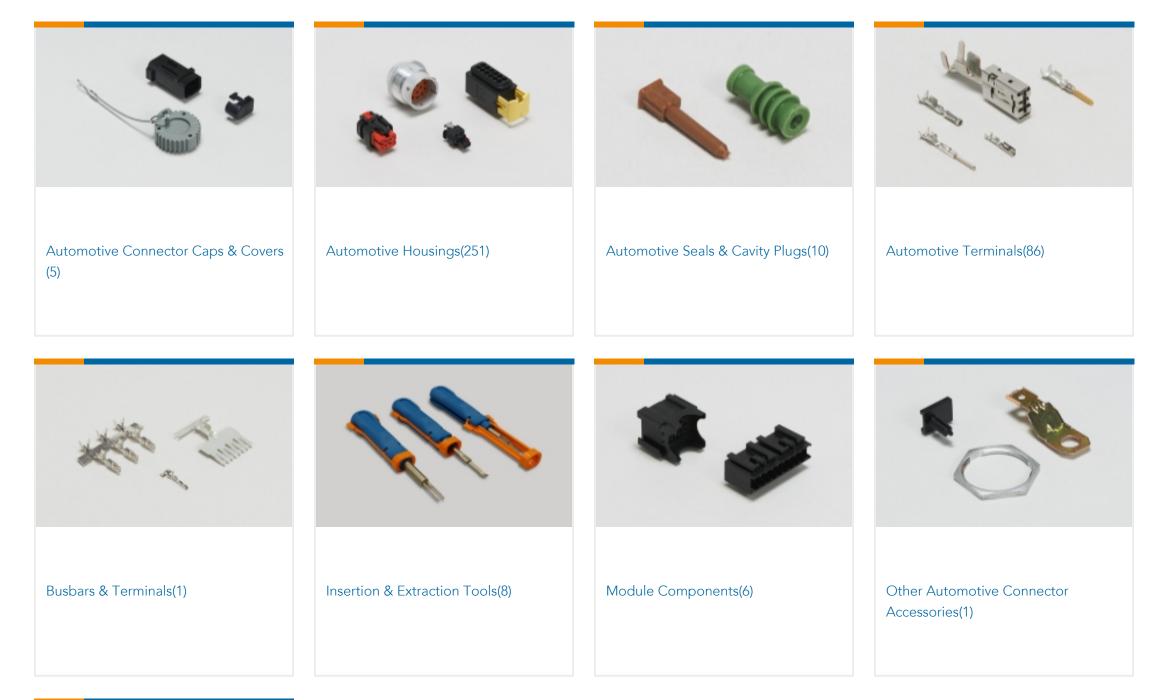



PCB Headers & Receptacles(1)

# Customers Also Bought



### Documents

Product Drawings JUN-POW-TIM HOUSING 18POS
English
CAD Files 3D PDF
3D
Customer View Model

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Gray, Wire & Cable, Signal, Junior Power Timer



#### ENG\_CVM\_CVM\_1-967624-1\_C.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_1-967624-1\_C.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-967624-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Timer Interconnection System

English

**Product Specifications** 

Product Specification

English

**Product Specification** 

English