
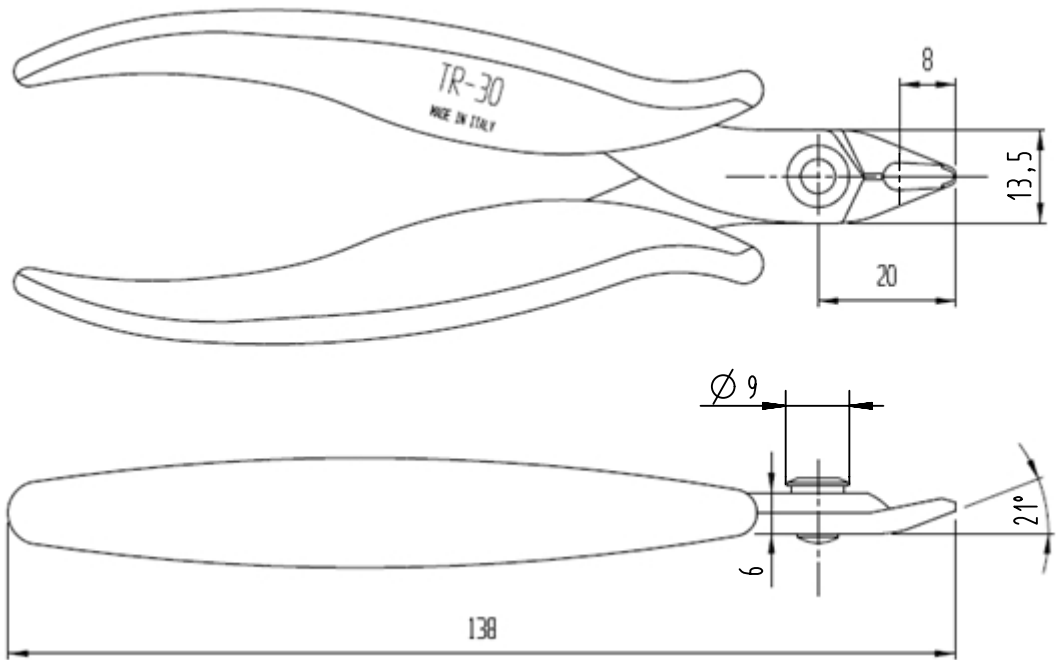


A



B

C

D



- Cutting edges angled 21°, especially for use in the electronic production, easy handling because of little weight
- Lap-Joint with spring
- Tight-fit joint movement
- Specially heat treated (temper 54-56° HRC)
- Carbon-steel C70 finely punched

| | | | | | | | |
|--|------------|-----------------------------------|-----------------|---------------------------------|---------------|-------------------------------------|-------------------------|
| Coating | A= | mm ² | V= | mm ³ | m= | g | Mat. INELCO p/n 061-501 |
|  All Dimensions in mm Original Size DIN A4 | Scale | Free size tol. | | Ref. | | | |
| | 1:1 | | | Sub. TB 09 45 800 0005 03.05.10 | | | |
|  All rights reserved Department EC PD - DE | Created by | Inspected by | Standardisation | Date | State | | |
| | HASSE | LINDKAMP | HOFFMANN | 2013-01-22 | Final Release | | |
| HARTING Electronics GmbH | | Title | | | | Doc-Key / ECM-Nr. | |
| D-32339 Espelkamp | | HARTING RJ Industrial Wire cutter | | | | 100527066/UGD/001/A 500000058428 | |
| | | Type | Number | | Rev. | Page | |
| | | TB | 09458000005 | | A | 1/1 | |