

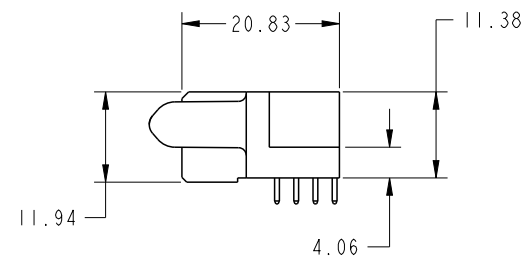


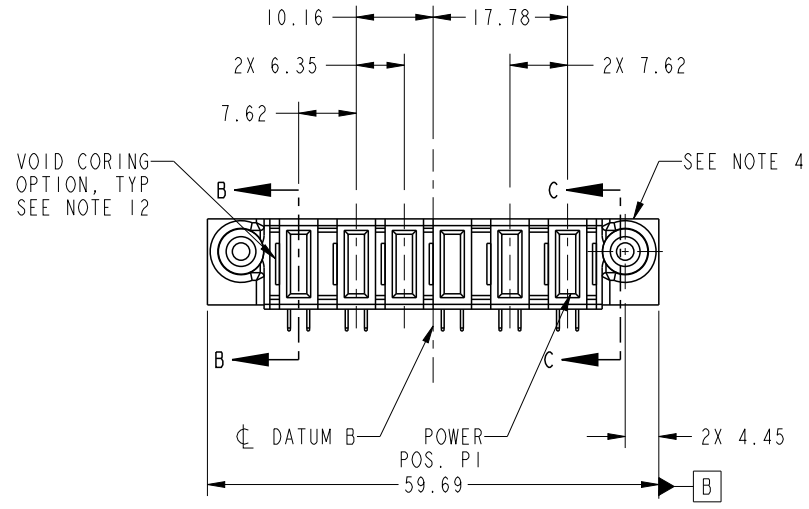

Copyright FCI.

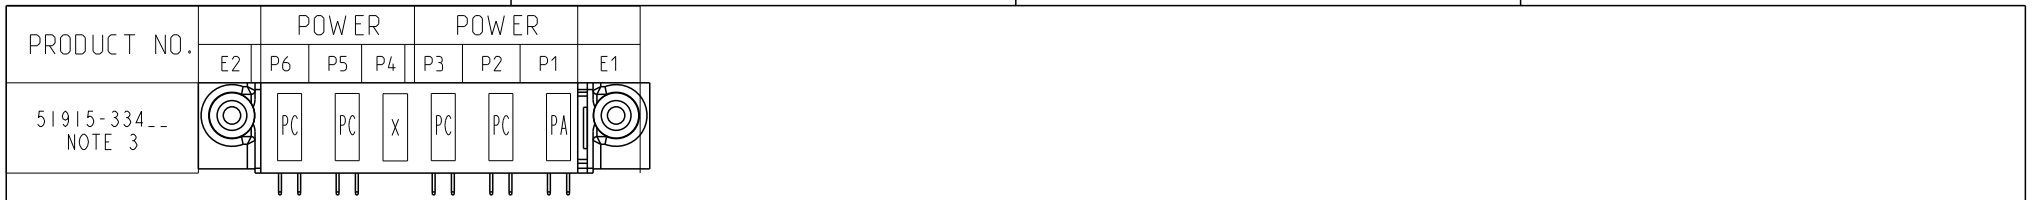


CODE	DIM "M" MATING LENGTH	CONTACT TYPE
PC	[2.34]	POWER
PA	[1.07]	POWER
X	N/A	OMITTED

spec ref		SEE NOTES		dr	Guang, Shi	2011/11/30	projection 	MM 	size	A4	scale	1:1
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Luo Weller	2012/09/16			ecn no	-		
SEE NOTES				chr	-	-			rel level	Released		
surface	linear	0.X	±0.50	FCI	www.fci.com	title	3ACP+1P+2ACP R/A STB RECEPTACLE	dwg no	51915-334	rev	A	
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°	cat. no.	Product - Customer Drw		sheet 1 of 4					


PrdrE File - REV C - 2009-06-09

PRODUCT NUMBER


51915-334__
NOTE 3

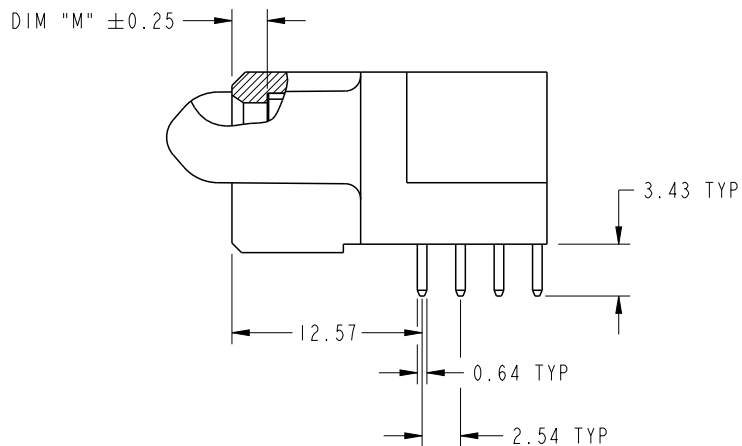

BROKEN-OUT SECTION B-B
SCALE 2:1

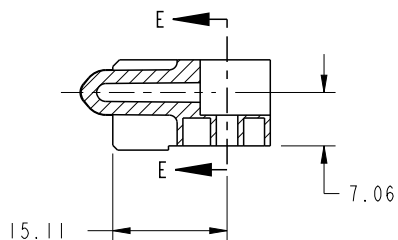

SECTION C-C




PARTIAL SECTION E-E

dr	Guang, Shi	2011/11/30	projection 	MM ←————→	size	A4	scale	1:1	
eng	Luo Weller	2012/09/16			ecn no	-			
chr	-	-			rel level	Released			
appr	Pei-Ming Zheng	2012/09/17	product family	PwrBlade	rev	A			
	title	3ACP+1P+2ACP R/A STB RECEPTACLE		dwg no	51915-334	www.fci.com	cat. no.	Product - Customer Drw	sheet 2 of 4

PRODUCT NUMBER

51915-334__
NOTE 3

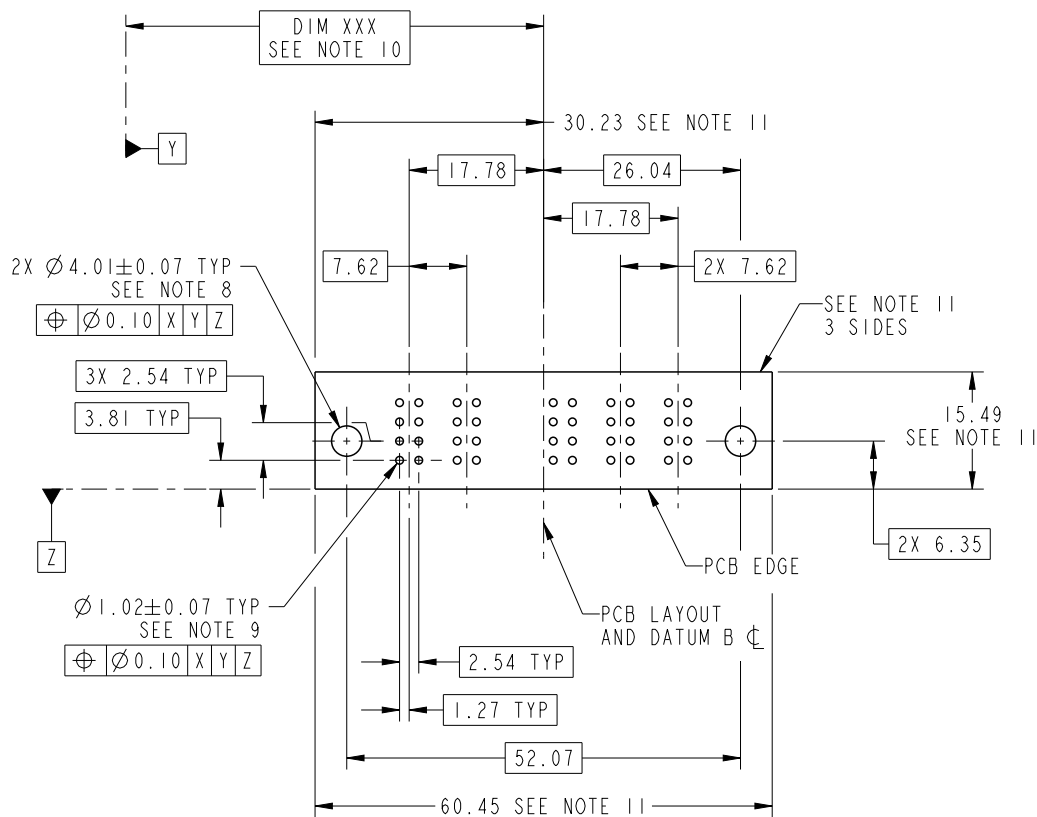

RECOMMENDED PCB LAYOUT

dr	Guang, Shi	2011/11/30	projection 	MM 	size	A4	scale	1:1
eng	Luo Weller	2012/09/16			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2012/09/17	product family	PwrBlade	rev	A		
	title	3ACP+1P+2ACP R/A STB RECEPTACLE		dwg no	51915-334			
www.fci.com	cat. no.	Product - Customer Drw			sheet 3 of 4			

PRODUCT NUMBER

51915-334__
NOTE 3

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

- 2. HOUSING MATERIAL: UL 94 V-0 GLASS FILLED HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY
 - 3. SEE ITEM 5 & 6 IN PRINT 10064183 FOR PLATING SPEC OF 51915-334 AND 51915-334LF RESPECTIVELY.
 - 4. MANUFACTURER'S NAME, DATE CODE AND OPTIONAL P/N TO APPEAR ON THIS SURFACE. THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
 - 5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.
 - 6. PACKAGED IN TRAYS.
- PCB NOTES:
- 7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.
 - 8. MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.
 - 9. $\varnothing 1.151 \pm 0.025$ DRILLED HOLES PLATED WITH
0.008 MIN SnPb OR Sn OVER 0.03
TO 0.08 Cu PLATING TO ACHIEVE
 $\varnothing 1.02 \pm .07$ HOLE.
 - 10. "DIM XXX" TO BE DETERMINED BY THE CUSTOMER.
 - 11. CONNECTOR KEEP-OUT ZONE.
 - 12. THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Guang, Shi	2011/11/30	projection 	MM 	size	A4	scale	1:1
eng	Luo Weller	2012/09/16			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2012/09/17	product family	PwrBlade	rev	A		
		title	3ACP+1P+2ACP R/A STB RECEPTACLE		dwg no	51915-334		
www.fci.com	cat. no.	Product - Customer Drw			sheet 4 of 4			