




IDENTIFICATION MARKING

NOTES:

1. MATERIALS:
 BODY: POLYETHERIMIDE PER ASTM-D5205.
 GROMMET: SILICONE BLEND ELASTOMER.
 DIODE: JANTXIN5618, QTY: 1
 INTERNAL PIN CONTACT:
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
 PERFORMANCE SPECIFICATION PER SAE-AS81714.
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)
 TEMPERATURE: -65°C TO 200°C.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25°C.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS AT SEA LEVEL,
 AND 200 VRMS AT 100,000 FT. ALTITUDE.
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.
 VIBRATION AND SHOCK: PER SAE-AS81714 PARA 358 & 9.
 MODULE ACCEPTS SOCKET CONTACTS (4) M39029/22-192.
2. MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

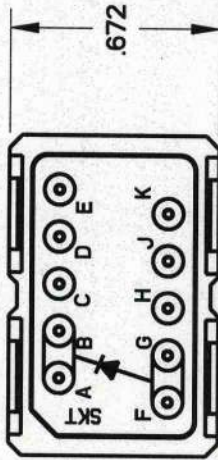

SEALING GROMMET

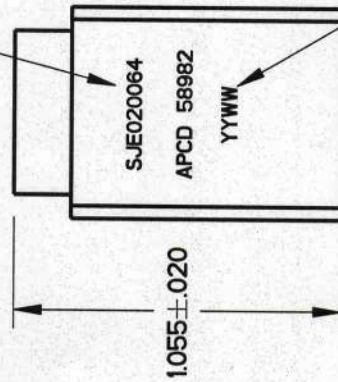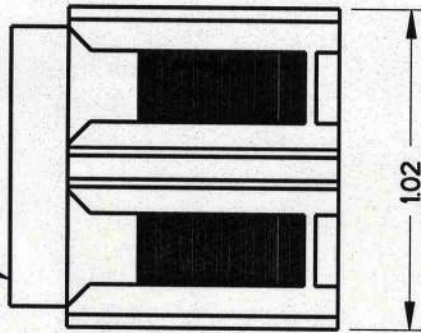

DATE CODE

DIMENSIONS ANSI Y14.5M UNITS: INCHES P/o/E FILE		TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±10°	PROJECTION 	TITLE SJE SERIES ELECTRONIC MODULE JANTXIN5618	SIZE A DWG NO. SJE020064_C CODE: 58982 SCALE: NONE	REV 1 SHEET 1 OF 1
ORIGINAL		Amphenol Pcd ENGR J. ADAMS 4/10/09 CHKD APPD <i>[Signature]</i> 4/13/09			THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA	