
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. RSA-3477-2								
REV	DESCRIPTION	DWN	DATE	APPROVED				
	ENGINEERING RELEASE	CZS	11/2/05	JDMc				

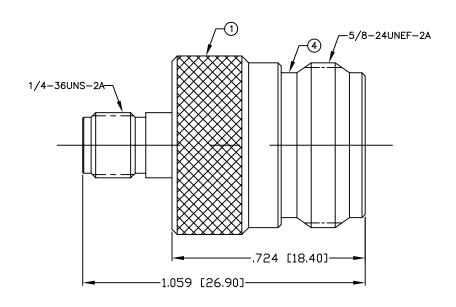

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-12.4 GHz INSERTION LOSS(dB): 0.03 $\times \sqrt{f(GHz)}$

VSWR: 1.3 MAX.

WORKING VOLTAGE: 500 V rms Max. @ Sea Level

INSULATION RESISTANCE: 5k M Ohms min. TEMPERATURE RANGE: -65°C TO 165°C

1 HOUSING 2 INSULATOR 3 CONTACT 4 BODY 5	1 BRASS 1 PTFE 1 PHOS BRONZE 1 BRASS	SILVER, 80 μ " GOLD, 3 μ " SILVER, 80 μ "	008974	UNLESS OTHERWISE SPECIF 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .0 3. CHAMFER 1ST & LAST THREADS 4: 4. SURFACE ROUGHNESS 63 FINISH 5. DIAMETERS ON COMMON CENTERS	7610 MIRAMAR RD SAN DIEGO,CA 92126 (858) 549-6340 (858) 549-6345 FAX
6 7 8 9			DRAWN 11/2/05	CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATIN DIMENSIONS ARE IN INC AND [MILLIMETERS] UNLESS OTHERWISE NO	ORIA JACK TO N JACK ADAPTER
1 1 1 2 1 3 1 4 # DESCRIPTION	QTY MATERIAL	FINISH	ORJ DRAWN C. ZUNIGA 4/29/98 APPROVALS DATE	TOLERANCES ARE: DECIMALS DIAMETE	TER A SIZE CABLE GROUP A DWG NO. (TER O1 [.03]