


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART NUMBER	MAIN - AWG [mm]			TAP - AWG [mm]	PANDUIT COLOR CODE	PANDUIT DIE INDEX NO.	STD. PKG QTY.
	COPPER CABLE	GROUND ROD	REBAR	COPPER CABLE			
GCE1/0-1/0	#6 SOL - 1/0 STR [16-50 SQ mm]	N/A	N/A	#6 SOL - 1/0 STR [16-50 SQ mm]	RED	PG10	1
GCE250-1/0	#1/0 STR - 250 kcmil [70-120 SQ mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8" - 1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLACK	PG25	
GCE250-250	#1/0 STR - 250 kcmil [70-120 SQ mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8" - 1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#1/0 STR - 250 kcmil [70-120 SQ mm]	BLACK	PG25	
GCE500-1/0	250 kcmil - 500 kcmil [150-240 SQ mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLUE	PG50	
GCE500-250	250 kcmil - 500 kcmil [150-240 SQ mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#1/0 STR - 250 kcmil [70-120 SQ mm]	BLUE	PG50	
GCE500-500	4/0 STR - 500 kcmil [105-240 SQ mm]	5/8"-3/4" ROD [15.9-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	4/0 STR - 500 kcmil [105-240 SQ mm]	YELLOW	PG55	

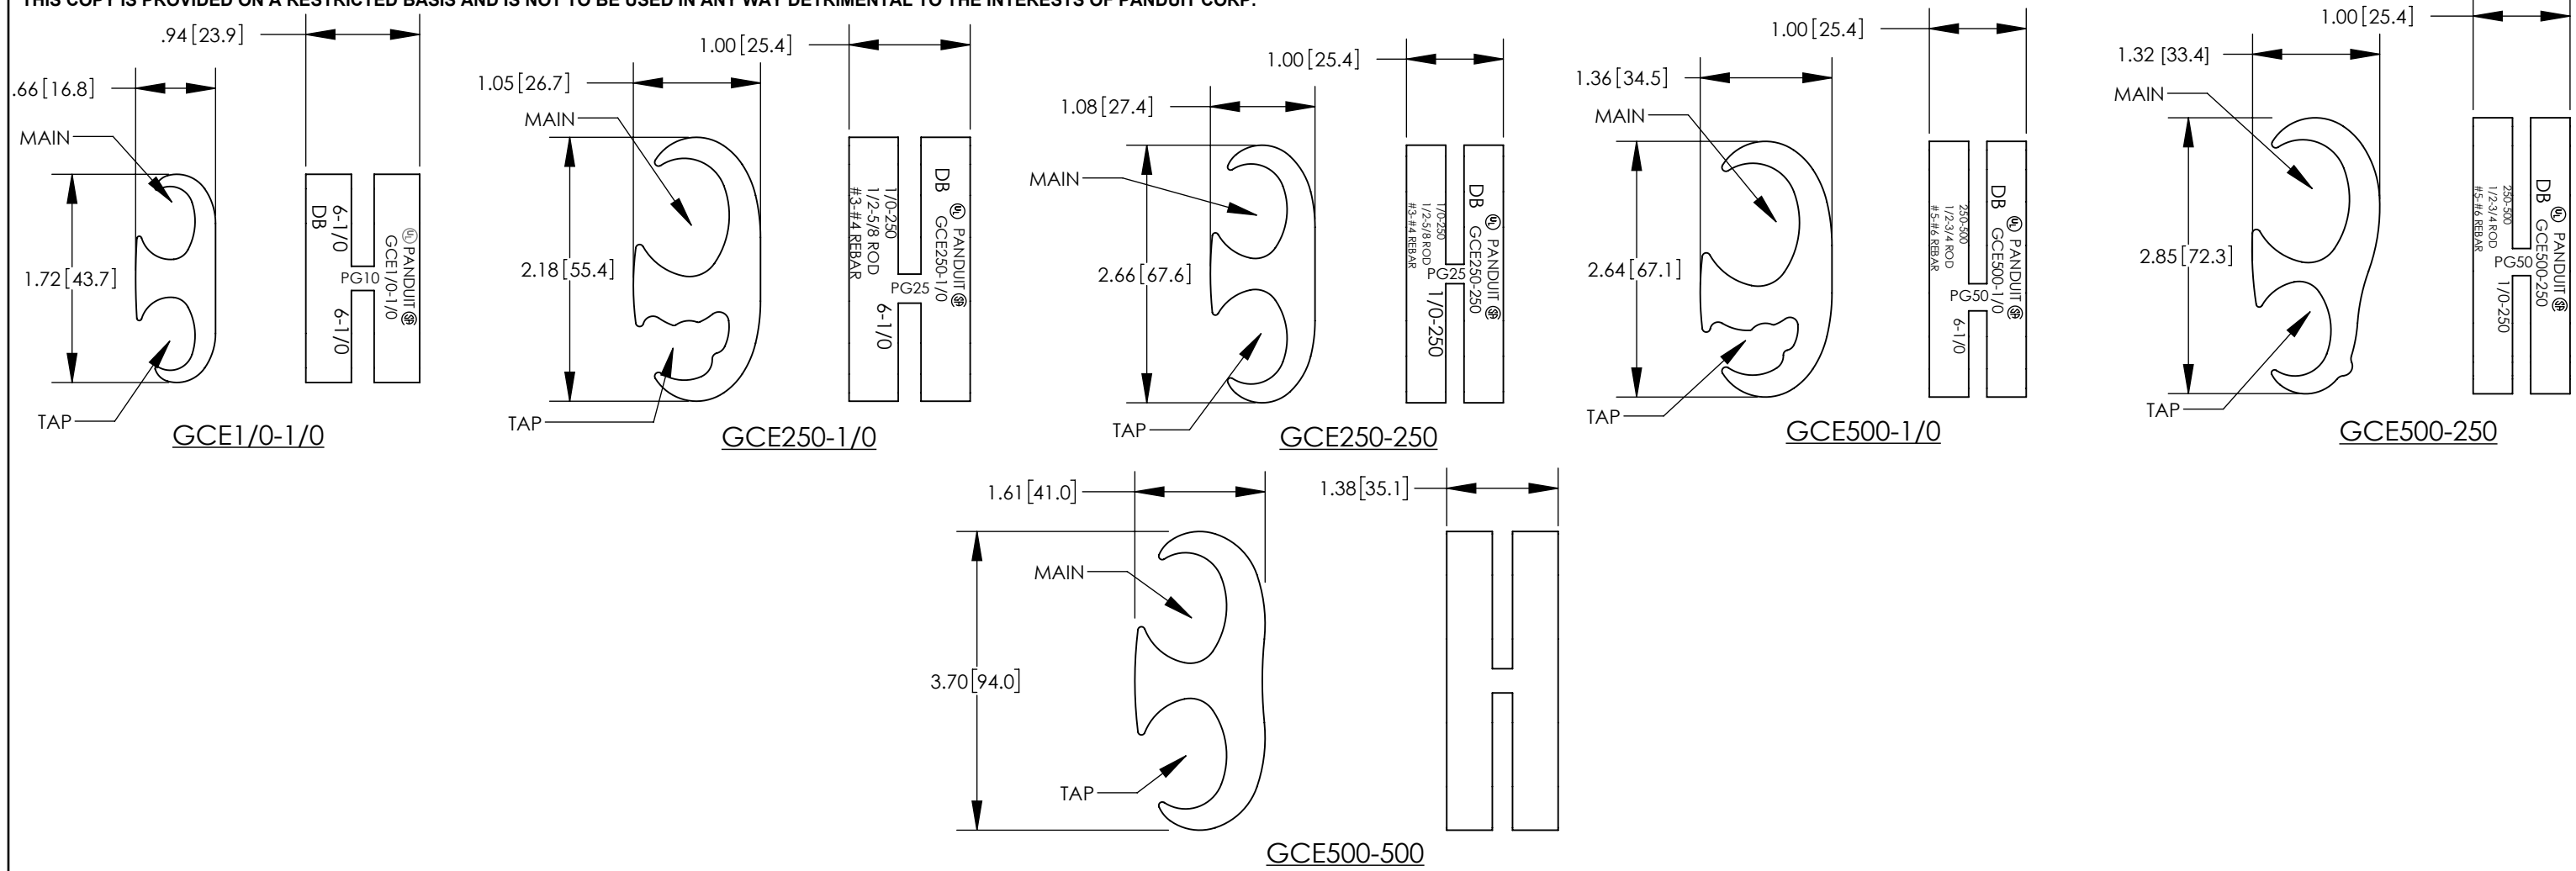

NOTES

- DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
- UL 467 LISTED AND CSA 22.2 CERTIFIED FOR GROUNDING & BONDING SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE WHEN CRIMPED WITH PANDUIT OR INDUSTRY STANDARD CRIMPING TOOLS & PANDUIT DIES.
- ENHANCED CRIMP PROCESS WITH PATENTED TECHNOLOGY MEETS IEEE STD 837 - 2002 AND REV 2014. SEE INSTRUCTION SHEET T-PMPI-289-PC ON WWW.PANDUIT.COM FOR FURTHER DETAILS.
NOTE: DOES NOT APPLY TO GCE500-500
- PRE-APPLIED ANTIOXIDANT COMPOUND ENSURES A HIGH QUALITY MECHANICAL AND ELECTRICAL BOND, SPEEDING INSTALLATION.
- CABLE TIES ARE PROVIDED WITH THE TAPS TO RETAIN WIRES IN POSITION DURING CRIMPING.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05	12/21	JHNU	JHNU	JADE	REVISED NOTE 3 TO REFERENCE INSTRUCTION SHEET	114242
04	5/18	JEH	JHNU	JADE	REVISED NOTE 3 ADDED REV 2014.	N10652AK-C41748

TITLE		E-TAP GROUNDING CONNECTORS	
CUSTOMER DRAWING		N10652AK/05	
ITEM REVISION NAME	N10652AK-C41748/05.SLDDRW		
DATASET FILE NAME	N10652AK-C41748/05.SLDDRW		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		.XXX ±	
.X ±		.XXX ±	
.XX ± .03 [0.8]		ANGLES ±	
THIRD ANGLE PROJECTION		DRAWING NUMBER C41748	
DRAWN BY	DATE	CHK	SCALE
JHNU	12/10	RGB	N/A
SHEET 1 OF 1		SIZE B	