

# Ceramic Balun RF Transformer

50Ω 600 to 1100 MHz

TCN3-11+



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

## Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power**	5W

\*\* Derate linearly to 2.5W at 100°C  
Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

PRIMARY DOT	4
PRIMARY(GND)	2,5
SECONDARY DOT	1
SECONDARY	6
NOT USED	3

## Outline Drawing



### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

## Outline Dimensions (Inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

## Demo Board MCL P/N: TB-287 Suggested PCB Layout (PL-163)



- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
    - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
    - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- wideband, 600 to 1100 MHz
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

## Applications

- WAN
- TACS
- AMPS
- NAMPS
- PDC

## Electrical Specifications (T<sub>AMB</sub>=25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE † (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
3	600-1100	0.7	6.0	1.0
	800-960	0.5	2.0	0.8


\* Insertion Loss is referenced to mid-band loss, 0.7 dB

† Relative to 180°


## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
600.00	0.76	12.66	0.64	2.49
650.00	0.71	14.01	0.35	0.81
700.00	0.69	15.80	0.08	0.16
750.00	0.67	17.61	0.14	0.70
800.00	0.66	19.41	0.34	0.57
850.00	0.69	20.29	0.52	0.06
900.00	0.73	19.39	0.68	0.78
950.00	0.79	17.84	0.81	2.19
1000.00	0.86	15.98	0.91	3.68
1100.00	1.04	13.16	1.01	7.26


TCN3-11+  
INSERTION LOSS

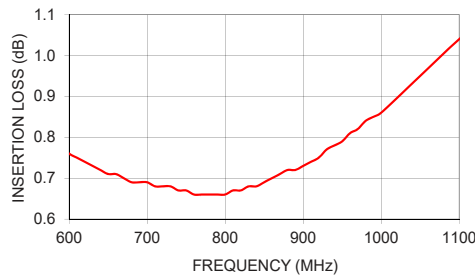


TCN3-11+  
AMPLITUDE UNBALANCE

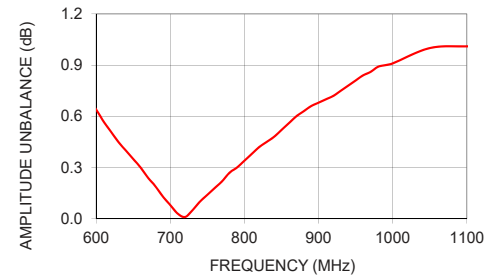

TCN3-11+  
PHASE UNBALANCE

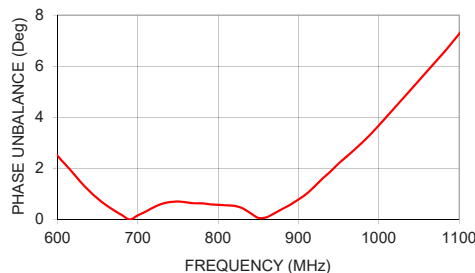

### configuration G



**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E  
M151107  
TCN3-11+  
ED-11687/4  
DJ/RS/CP/AM  
151008