


MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Inlet Current rating: 10 A 

Fuse Holder Current rating: 6A  6.3A 

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute





ORDERING CODE:


42R35-3 $\frac{2}{1}$ $\frac{2}{2}$ - $\frac{3}{3}$


- 1) COLOR
1 = BLACK
2 = GRAY


2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C
2+GROUND 1 FUSE 

2 = 10A 250V 70°C
2+GROUND 2 FUSE 

4 = 10A 250V 120°C
2+GROUND 2 FUSE 

5 = 10A 250V 70°C
2 - 1 FUSE 


6 = 10A 250V 70°C
2 - 2 FUSE 

3) PANEL THICKNESS






P/N	A	MAX. PANEL THICKNESS
42R35-3X2X-150	1.5	1.5
42R35-3X2X-200	2.0	2.0

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

REVISIONS					
REV	DATE	CHANGE	CHNG	CHK	APPR
A	4/11/17	cUL WAS CSA	PB		
B	12/21/21	REVISED CURRENT RATINGS	PB		

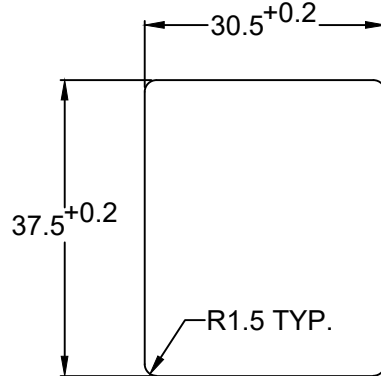

RECOMMENDED
PANEL CUTOUT

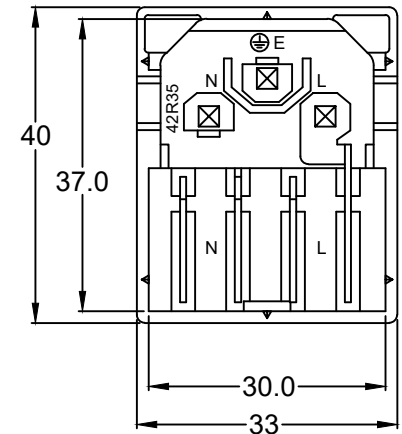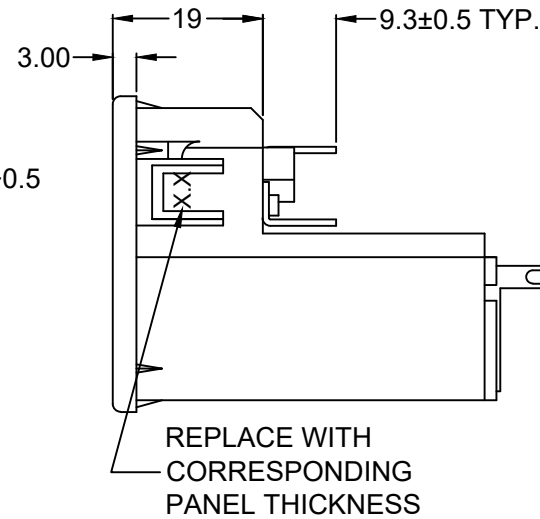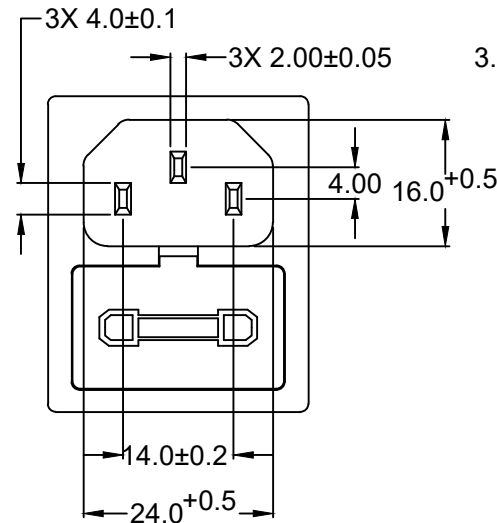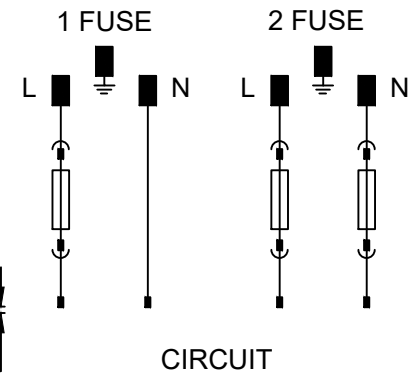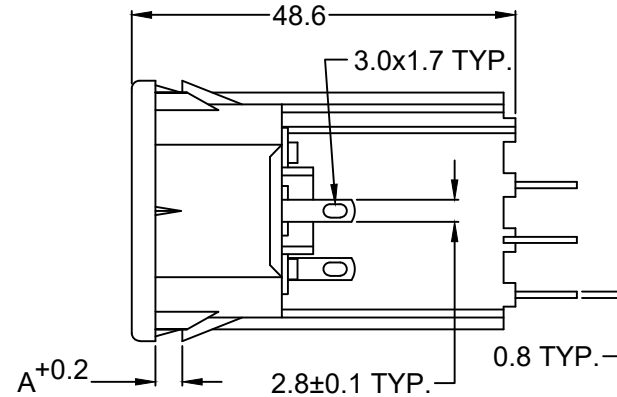

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	GQ	DATE:	09/18/01
CHECK BY	TD	DATE:	09/19/01
APPR BY	PB	DATE:	09/19/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 COMBINATION FUSE HOLDER
APPL. INLET, SOLDER TERMINALS; SNAP-IN

PART #: 42R35-3X2X-XXX		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: B
SCALE: NTS		