




File: E209153

**Mechanical Specifications (mm)**

	D:	15.0	±	Max
	T:	5.0	±	Max
	Lead Diameter	0.8	±	Nom
	S:	7.8	±	Nom
	L:	38.0	±	min
	Coating Lead Run Down (straight Leads)		±	
	B:	4.00	±	1
	C:	3.45	±	1

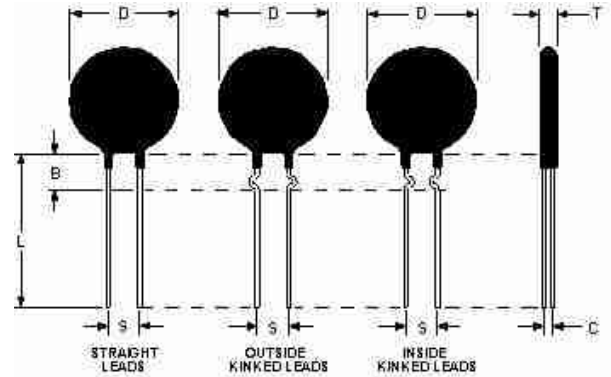

**Electrical Specifications**

	Resistance:	40.0	Ω	±	20 %
	Max Steady State Current upto 65°C:	4.00		A	
	Max Rec. Energy Rating:	35		J	
	Resistance @ 100% Max Current:	0.00	Ω		
	Resistance @ 50% Max Current:	0.90	Ω		
	Body Temperature at 100% Max Current:	178.00	°c		
	Dissipation Constant:	27.0	mw/°c		
	Thermal Time Constant:	48	Sec.		
	Material Type (for Beta and Curve):	G			

<b>SL15 40004</b>	
Date: 04/08/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A