

SSM-1XX-XXX-XX-XX-XX-XX REVISION DE NOTES: **PACKAGING** © REPRESENTS A CRITICAL DIMENSION. No OF POSITIONS BLANK: TUBES (SEE NOTES 4 & 15) 2. MINIMUM PUSHOUT FORCE: .50 LBS. -02 THRU -36 3. COPLANARITY TO BE: -TR: TAPE AND REEL DO NOT (SEE NOTE 8) -DH: -36 THRU -28 POS: .008[0.20] (SEE NOTES 15 & 16) SCALE FROM -02 THRU -27 POS: .006[0.15] -FR: FULL REEL QTY. TAPE & REEL THIS PRINT PLATING SPECIFICATION -SV, -SH: -02 THRU 36 POS: .006 (FULL STRIP STOCK: .008) (SEE NOTES 15 & 16) -S: 30µ" SELECTIVE GOLD IN CONTACT 4. PACKAGE IN TUBES PER SHT 4, TABLE 2. ALL OTHER POSITIONS BULK PACKAGE. (-XR AVAILABLE FOR 29 POS MAX) AREA, MATTE TIN ON TAIL 5. MAXIMUM CUT FLASH: .015[0.38] -L: 10µ" SELECTIVE GOLD IN CONTACT 6. NOTCH OF PPP-12 TO BE ORIENTED TOWARD SAME END AS POSITION 1. **OPTION** AREA, MATTE TIN ON TAIL. 7. ROWS TO BE WITHIN .004[0.10] OF ONE ANOTHER. -P: PICK AND PLACE PAD -T: MATTE TIN ON CONTACT AND TAIL. 8. -36 MAX POSITION AVAILABLE, -50 FOR STOCK ONLY ONLY AVAILABLE ON -SV -F: 3µ" SELECTIVE GOLD IN CONTACT 9. TAIL SIDE ENDWALL AFTER CUTTING: .019[0.48]±.005[0.13] USE PPP-12, SEE FIG 6, SHT 3) AREA, MATTE TIN ON TAIL. 10. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION (SEE NOTE 12) -STL: 30µ" SELECTIVE GOLD IN CONTACT IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS AREA, TIN/LEAD (90/10) ON TAIL -K: POLYIMIDE FILM PAD MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION. -H: 30µ" SELECTIVE GOLD IŃ CONTACT (SEE FIG 5, SHT 2) 11. FOR -SV TAIL STYLE: EVEN CUTS LOSE 2 POSITIONS PER CUT; ODD CUTS USE K-DOT-.138-.250-.005) AREA, 3µ" SELECTIVE GOLD ON TAIL -LM: 10µ" SELECTIVE GOLD IN CONTACT LOSE 1 POSITION PER CUT. (NOT AVAILABLE ON -SH AND -DH) 12. IF POLARIZATION OCCURS AT CENTER POSITION(S) OF BODY, MOVE PICK & AREA, MATTE TIN ON TAIL POLARIZATION OPTION PLACE PAD LEFT OR RIGHT TO NEXT AVAILABLE PÓSITION. -TM: MATTE TIN ON CONTACT AND TAIL. -XX: POSITION TO BE POLARIZED 13. THIS DIMENSION IS TO BE MEASURED RELATIVE TO DATUM -Z--FM: 3u" SELECTIVE GOLD IN CONTACT (USE PK-06-N, SEE FIG 7, SHT 3 14. CHAMFERED END WALL MAY OR MAY NOT BE ON CUT TO POSITION PARTS. FOR POLARIZATION POSITIONS) 15. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING TAIL SPECIFICATION (NOT AVAILABLE FOR -BE OPTIÓN) EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM. -SV: SINGLE VERTICAL (SEE FIG 1) 16. ATTACH LABEL TO EACH REEL MOUNTING OPTION -LC: LOCKING CLIP (USE SSM-XX-S) -SH: SINGLE HORIZÓNTAL (SEE FIG 3, SHT 2) (USE LC-05-TM, SEE NOTE 10) (USE SSM-XX-SH) FOR -SH AND -DH USE MOLDED TO -DH: DOUBLE HORIZÓNTAL (SEE FIG 4, SHT 3) POSITION BODIES) (USE BCH-XX-D) (NO OF POS x .100[2.54]) -.100[2.54] ► (NO OF POS x .100[2.54]) **OPTION** ±.010[0.25] (CUT TOLERANCE, SEE NOTE 11) -BE: BOTTOM ENTRY ±.005[0.13] (MOLDED BODY TOLERANCE) (ONLY AVAILABLE ON -SV) .050 [1.27 (USE SSM-XX-S-BE) 02 REF 36 (SEE FIG 2, SHT 2) TABLE 1 .100[2.54] REF U BODY/LEAD STYLE | CONTACT #1 | CONTACT #2 01 35 -SV C-95-02-X N/A CONTACT #1 SSM-XX-S .18 [4.6] REF MAX SWAY © -SH C-58-06-X N/A -Z-(EITHER DIRECTION) -DH C-58-08-X C-58-07-X \bigcirc FLUSH TO .005[0.13] MAX SEE NOTE 9 $.295^{+.002}_{-.005}$ $7.49^{+0.051}_{-0.127}$ (SEE NOTE 13) (MEASURE AT BEND) 5 .290 [7.37] REF SEE NOTE 3 $\langle \mathbb{C} \rangle$ "A"← (SEE NOTE 13) .055 1.40 DETAIL 'D C-05-TM 2° MAX SWAY -.047 [1.19] (EITHER DIRECTION) SCALE 8: (NO OF POS x .100[2.54]) -.200[5.08] SECTION "A"-"A" -SV IN-PROCESS SCALE 3:1 FIG 1 -SV: SINGLE VERTICAL ROW UNLESS OTHERWISE SPECIFIED. (SSM-1XX-XXX-SV-LC SHOWN) THIS DOCUMENT CONTAINS CONFIDENTIAL AND DIMENSIONS ARE IN INCHES. PROPRIETARY INFORMATION AND ALL DESIGN. TOLERANCES ARE: AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC. DECIMALS **ANGLES** INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE .XX: ±.01 [0.3] .XXX: ±.005 [0.13] 2° OR PART. TO ANY LINAUTHORIZED PERSON OR ENTITY NOR 520 PARK EAST BLVD, NEW ALBANY, IN 47150 REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY PHONE: 812-944-6733 FAX: 812-948-5047 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS .XXXX: ±.0020 [0.051] e-Mail info@SAMTEC.com DO NOT SCALE DRAWING SHEET SCALE: 2:1 .100[2.54] C.L. SURFACE MOUNT SOCKET STRIP INSULATOR: LCP, UL 94 VO, COLOR: BLACK CONTACT: PHOS BRONZE SSM-1XX-XXX-XX-XX-XX-XXX-XX BY: KOLB 09/11/1998 | SHEET 1 OF 4 F:\DWG\MISC\MKTG\SSM-1XX-XXX-XX-XX-XX-XX-XX-MKT.SLDDRW

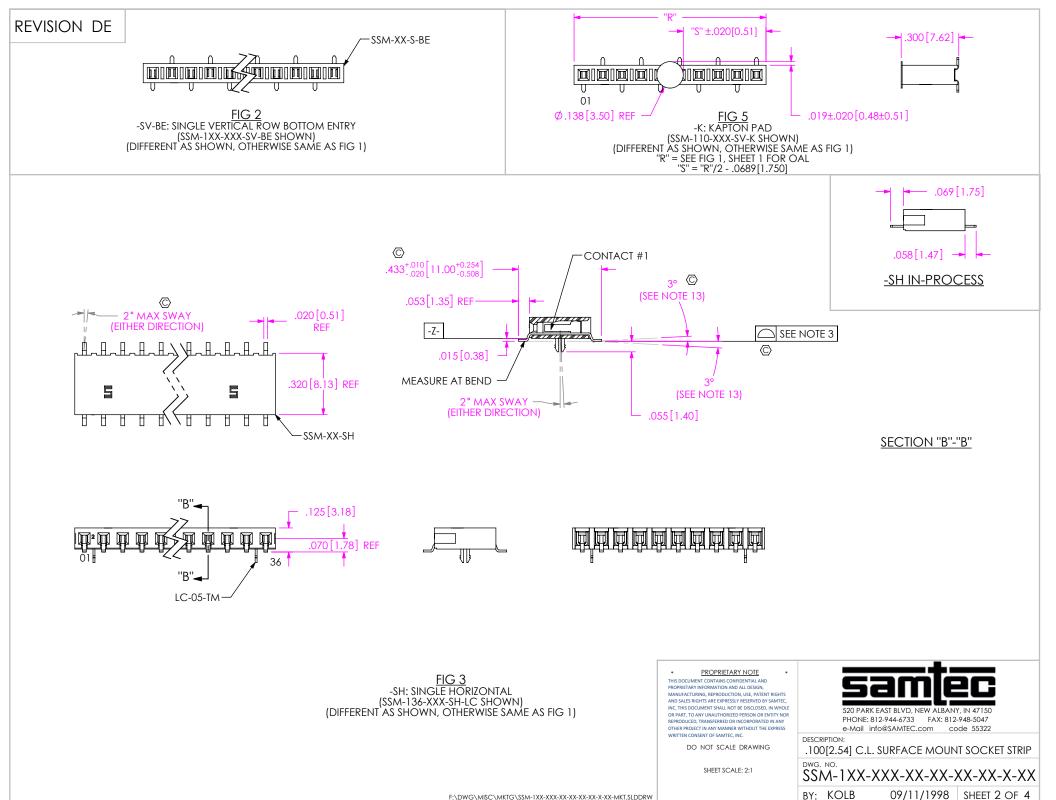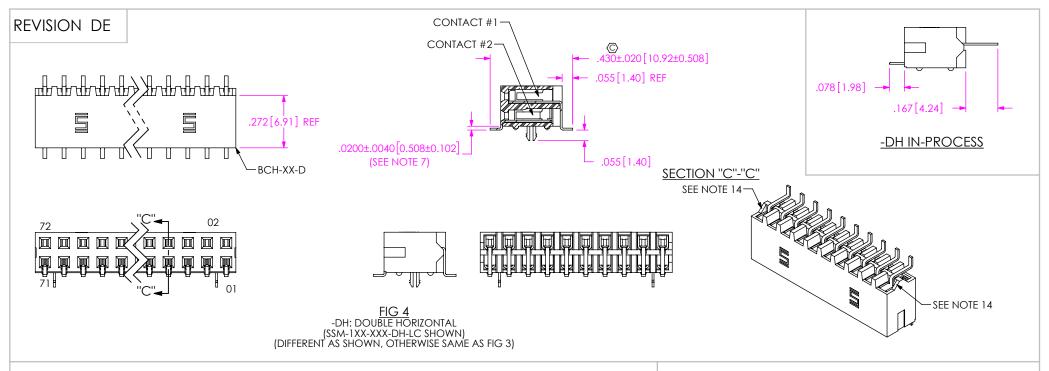

F:\DWG\MISC\MKTG\SSM-1XX-XXX-XX-XX-XX-XX-XX-MKT.SLDDRW



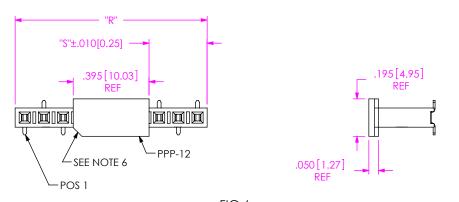



FIG 6

-P: PICK AND PLACE PAD
(SSM-110-XXX-SV-P SHOWN)
-02 AND -03 POS NOT AVAILABLE WITH POLARIZATION
-04 POS - CANNOT OFFER IF POLARIZATION IS POS 2 OR 3
-05 POS - CANNOT OFFER IF POLARIZATION IS POS 3
*MUST USE TR ON POS 2 & 3
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
"R" = SEE FIG 1, SHEET 1 FOR OAL
"S" = IF NO OF POS IS EVEN: "R"/2 - .1975[5.017]
IF NO OF POS IS ODD: "R"/2 - .2475[6.287]

IF CENTER POS IS POLARIZED, USE TABLE BELOW

NO OF POS	DIRECTION PAD MOVED (1 POS TO NEXT AVAIL)	MIN POS	FORMULA	
EVEN	LEFT	6	"S" = "R"/20975[2.477]	
EVEN	RIGHT	6	"S" = "R"/22975[7.557]	
ODD	LEFT	5	"S" = "R"/21475[3.747]	
ODD	RIGHT	7	"S" = "R"/23475[8.827]	

F:\DWG\MISC\MKTG\SSM-1XX-XXX-XX-XX-XX-XX-MKT.SLDDRW

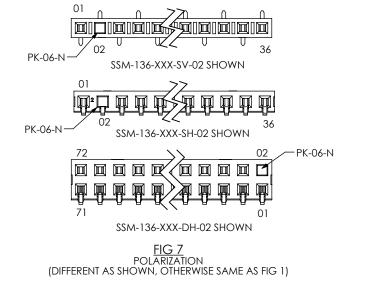

* PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, U.S., PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTE, INC. THIS DOCUMENT SHALL NOT BE DESCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR PERPODUCED, TRANSFERRED OR INCORPORATED IN WORTH OTHER PROJECT IN ANY MANUFER WITHOUT THE EXPRESS WRITTEN CONSENS TO 5 SAMTE, IN

DO NOT SCALE DRAWING

SHEET SCALE: 3:2

samtec


520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


DESCRIPTION:

.100[2.54] C.L. SURFACE MOUNT SOCKET STRIP


OWG. NO.

SSM-1XX-XXX-XX-XX-XX-XX-XX BY: KOLB 09/11/1998 SHEET 3 OF 4

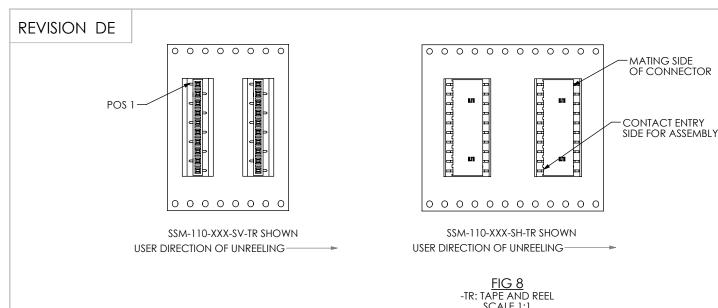

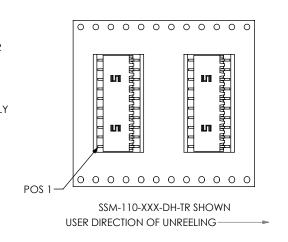

SCALE 1:1

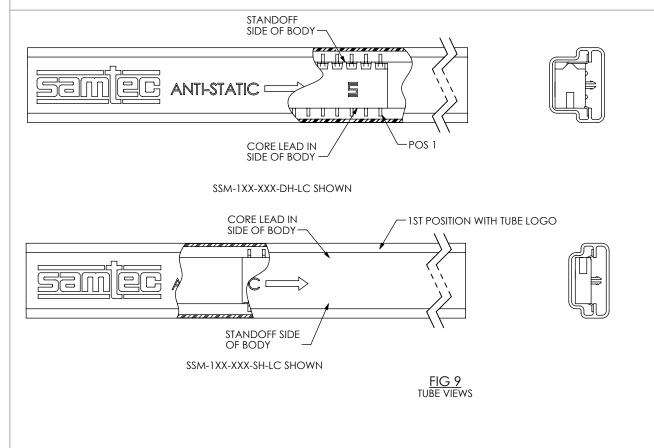



SSM-1XX-XXX-SV-P SHOWN



SSM-1XX-XXX-SV-LC SHOWN



SSM-1XX-XXX-SV-LC-P SHOWN (SSM-1XX-XXX-SV-LC-K SIMILAR) (SSM-1XX-XXX-SV-K SIMILAR)

TABLE 2				
PART NUMBER	TUBE	PLUG	POS TO BE TUBED (SEE NOTE 4)	
SSM-SV PT-1-24-05-1		TD 24 (2)	03-36	
SSM-SV-LC	1-1-24-05-15	117-24 (2)	02-36	
SSM-SV-P			04-36	
SSM-SV-K	PT-1-24-02-15	TP-03 (2)	03-36	
SSM-SV-LC-P	SM-SV-LC-P		04-36	
SSM-SH	PT-1-24-07-15	TP-03 (2)	02-36	
SSM-DH	PT-1-24-06-15	TP-07 (2)	02-36	

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND

PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:2



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

.100[2.54] C.L. SURFACE MOUNT SOCKET STRIP

SSM-1XX-XXX-XX-XX-XX-XX BY: KOLB 09/11/1998 | SHEET 4 OF 4

F:\DWG\MISC\MKTG\SSM-1XX-XXX-XX-XX-XX-XX-XX-MKT.SLDDRW