

WIRE COMBINATIONS FOR NYLON-INSUALTED CLOSED END CONNECTORS

(D1)
 MOLEX P/N: 191600012 (NC-2214), 191600130 (NC-2214BULK)
 191600070 (NC-2214T), 191600091 (NC-2214BT)
 (D1) (D1)

WIRE PREPARATION

NOTE: PRE-TWISTING NOT REQD FOR OEM APPLICATIONS
 SOLID: (OEM ONLY)
 A. STRIP LEADS TO .38(9.5)
 B. INSERT INTO CONNECTOR & CRIMP
 STRANDED:
 A. STRIP LEADS TO APROX. .75(19.1)
 B. TWIST WIRE COMBINATION EVENLY & TIGHT.
 C. TRIM STRIPPED PRE-TWISTED ZONE TO .38(9.5).
 D. INSERT INTO CONNECTOR AND CRIMP.


UL LISTED WIRE COMBINATIONS

STRANDED WIRE ONLY

16 AWG	18 AWG	20 AWG	22 AWG
			7
		1	6
	1		5
		2	4
	1		4
		2	3
1			3
		3	2
1			2
		4	1
	2		1
1			1
		4	
	1	3	
1		2	
	2	1	
1		1	
	3		

STRANDED WIRE ONLY

16 AWG	18 AWG	20 AWG	22 AWG
	2		
1	1		
1	1	1	
	1	2	
	2		2
	1		3
	1		1
	1	1	1
	1	2	1
	1	1	2
	1	1	3
		3	1
		2	2
		1	4
		1	5
			6
1	1	1	1

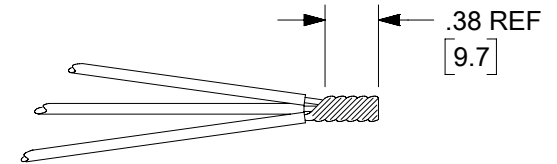

RATING 105°C 300 VOLT
 FILE: E32244



RATING 125°C 300 VOLT
 FILE: LR 18689

APPLICATION WITH HANDTOOL:

HOLD TOOL WITH LOCATOR PLATE FACING UP.
 INSERT CLOSED END CONNECTOR IN HOLE.
 INSURE THAT SHOULDER OF CONNECTOR IS RESTING ON LOCATOR PLATE.
 CLOSE TOOL JAWS UNTIL CONNECTOR IS HELD SNUG IN PLACE.
 LOAD CONNECTOR WITH DESIRED WIRE COMBINATION.
 COMPLETE CRIMP BY CLOSING TOOL HANDLES UNTIL THEY RELEASE.

CRIMP TOOLING AVAILABLE

640010600 (RHT-7000) HANDTOOL
 640053400 (AT-2214) CRIMP HEAD OR 640050600 (AT-7000) CRIMP HEAD
 FOR 192790001 (AT-200) AIR HAND TOOL

(D1)

192280030 (ATP-301) AIR TAPE PRESS OR
 638853500 MINI-MAC TAPE APPLICATOR WITH
 192880242 (ATP-NC-2214) CRIMPING DIES

ADDITIONAL UL LISTED WIRE COMBINATIONS

- (3) 18 AWG SOLID
- (2) 18 AWG SOLID




CSA CERTIFIED WIRE COMBINATIONS

- (7) 22 AWG STRANDED
- (4) 22 AWG STRANDED WITH (2) 20 AWG STRANDED
- (2) 20 AWG STRANDED WITH (1) 16 AWG STRANDED
- (2) 18 AWG STRANDED WITH (1) 20 AWG STRANDED
- (3) 18 AWG STRANDED
- (2) 18 AWG SOLID

NOTE: THIS DOCUMENT USED TO MAKE STUFFER SHEET
 PART NO: 194080109
 DOC NO'S: E-19160-009 & PK-19408-109

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DIMENSION UNITS	SCALE	CURRENT REV DESC: P/N TYPO/ ERROR: 191600070 WAS 191600071, 191600130 WAS 190600129, 191600091 WAS 191600190. CRIMP TOOLING P/N'S UPDATED.							<p>CLOSED END CONNECTOR WIRE COMBINATNS NC-2214 PRODUCT SPECIFICATION</p>
FA = 0	INCH/MM	NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 704038		DRWN: DMYRICK 2022/04/07		DOCUMENT NUMBER		
FE = 0			MM	INCH	DRWN: JHACKNEY 1999/11/03		CHKD: JMACNEIL 2022/05/04		DOC TYPE		
FD = 0			4 PLACES ±	±	APPDR: JMACNEIL 2022/05/04		APPR: JMACNEIL 2022/05/04		DOC PART		
DIVISIONAL SYMBOLS				3 PLACES ±	±	INITIAL REVISION:		REVISION			
				2 PLACES ±	±	DRWN: JHACKNEY 2012/06/06		PS-19160-007		D1	
				1 PLACE ±	±	APPR: JMACNEIL		PSD		001	
				0 PLACES ±	±			GENERAL MARKET		1 OF 1	
				ANGULAR TOL ± °	°						
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
							B-SIZE	19160	SEE CHART	GENERAL MARKET	1 OF 1

LOOSE PIECE		TAPE MOUNTED		"L" MAX.	"B" MIN (G1)	"D" MAX.	"E" MIN.	I.D. MIN.	O.D. MAX.	"A" DIM ±.02/0.5 (G1)
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.							
191600012	NC-2214	191600070	NC-2214T	.62/15.7	.30/7.6	.19/4.8	.24/6.1	.09/2.3	.32/8.1	1.54/39.2
191600009	NC-2212	191600071	NC-2212T	.76/19.3	.30/7.6	.23/5.8	.27/6.9	.10/2.5	.36/9.1	1.63/41.4
191600002	NC-1610	191600083	NC-1610T	.90/22.8	.28/7.1	.28/7.1	.38/9.6	.15/3.8	.45/11.4	1.75/44.5
191600024	NC-8	191600028	NC-8T	1.10/27.9	.42/10.6	.36/9.1	.48/12.2	.21/5.3	.57/14.5	1.86/47.4

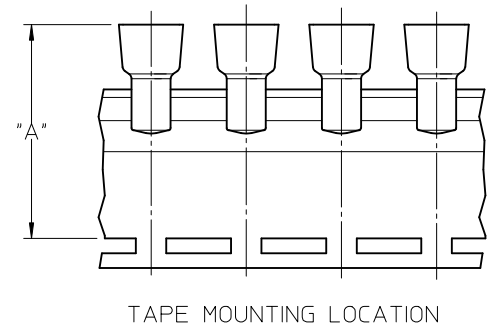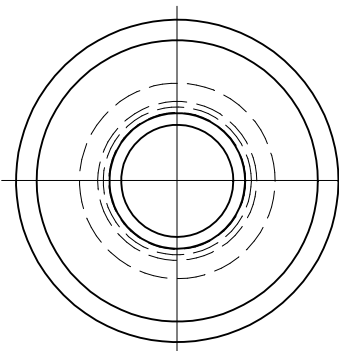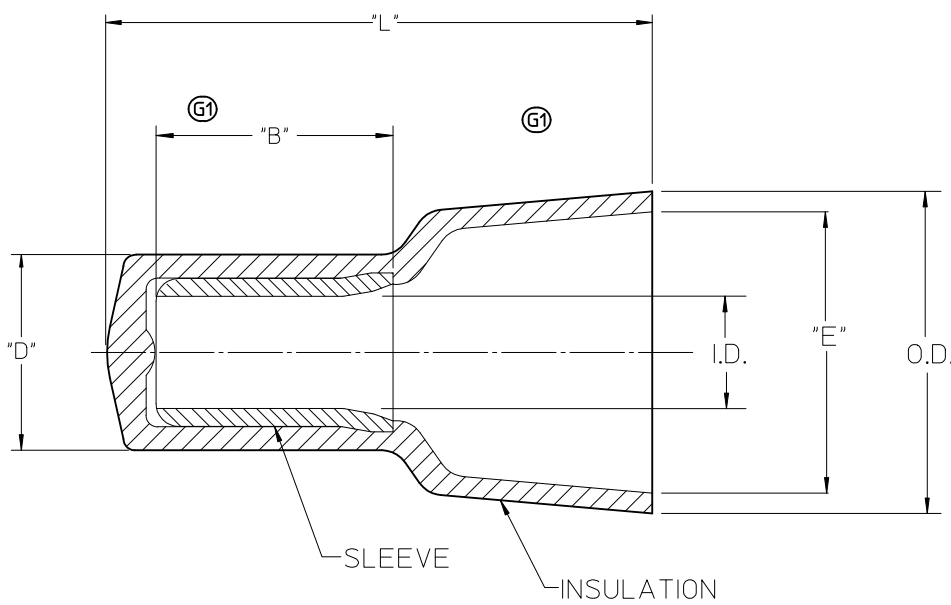

NOTES:

- MATERIAL: SLEEVE: TIN-PLATED COPPER
INSULATION: 6/6 NYLON,
NATURAL TRANSLUCENT
- PARTS ARE ROHS COMPLIANT.

SALES DRAWING

CORRECT TOLERANCES EC NO: WNA2010-0673 DRAWN BY: DRW:ETHRODAHL 2010/05/07 CHK'D R: DEROSS 04/02/23 APPR: JMACEIL 2010/06/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
				IN/MM		5:1	INCH				
				mm	INCH	DRAWN BY	DATE	TITLE			
				4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	H. BEITZE	04/02/23	CLOSED END CONNECTORS NYLON INSULATED			
		2 PLACES ± --- ± ---	1 PLACE ± --- ± ---	CHCK'D BY	DATE	MOLEX INCORPORATED					
		ANGULAR ± ---°		R. DEROSS	04/02/23					MATERIAL NO. SD-19160-001 SHEET NO. 1 OF 1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	DOCUMENT NO. SD-19160-001					
				R. DEROSS	04/02/23					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
				SEE CHART							
				SIZE							
				B							