



UNIT:mm

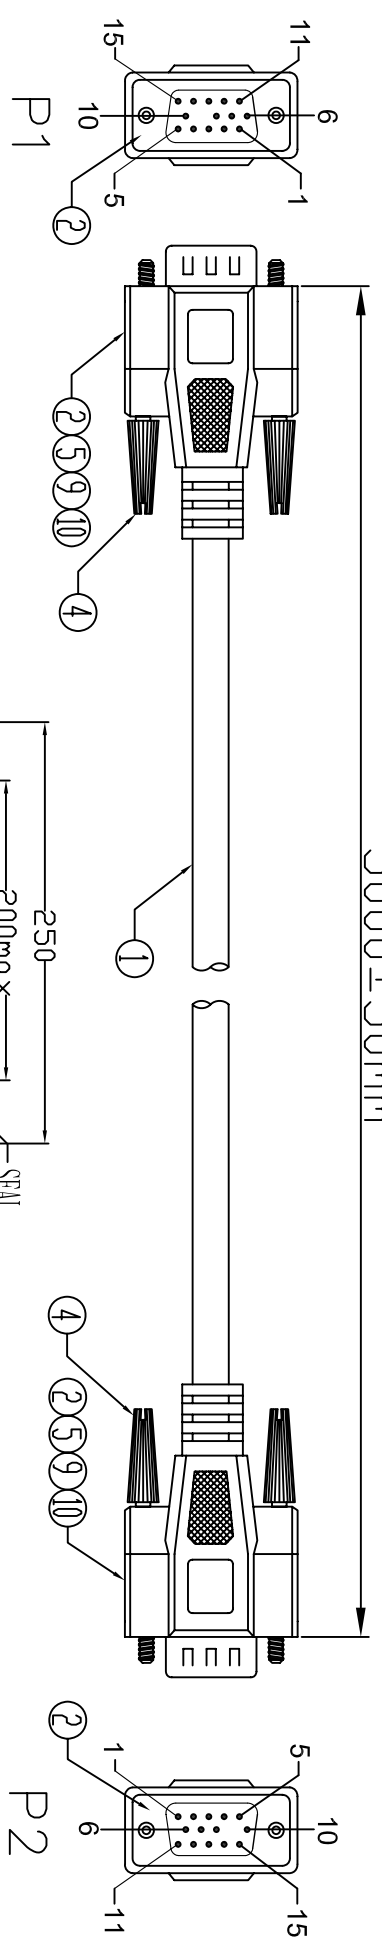

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:3 ohm max.
 3.Insulation Resistance:5M ohm min.
 4.Hi-Pot:300V DC/10ms

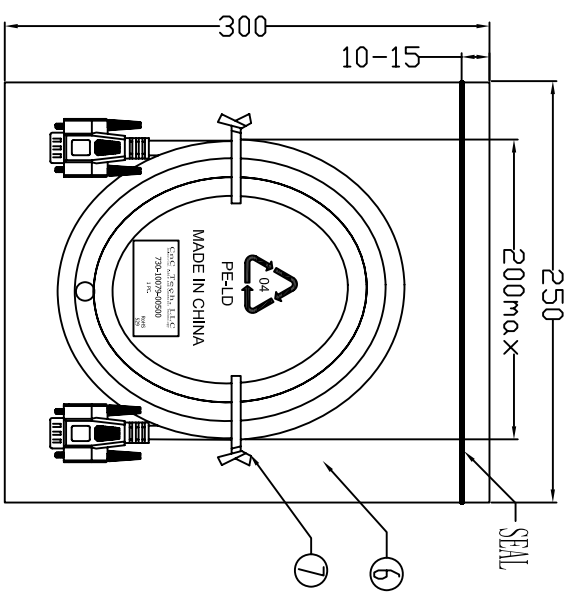

1PCS/PE BAG

PIN ASSIGNMENT

P1	1	Red	P2	1
	2	Gray		2
	3	Blue		3
	4	Brown		4
	5	Black		5
	6	Orange		6
	7	White		7
	8	Braid		8
	9			9
	10			10
	11			11
	12			12
	13			13
	14			14
	15			15

⑩	TUBE	48mm	HEAT SHRINK TUBE BLACK 003.0mm L=8mm*6
⑨	TUBE	88mm	HEAT SHRINK TUBE BLACK 001.5mm L1=20mm*2, L2=8mm*6
⑧	PE BAG	1/5	CLEAR SIZE:360*380*0.05mm PRINT BLACK*MADE IN CHINA*"SPCS" 及印生产周期,有透气孔.
⑦	TIE	2	WHITE L=200mm
⑥	PE BAG	1	CLEAR SIZE:260*300*0.05mm PRINT BLACK*MADE IN CHINA" 及印生产周期,有透气孔.
⑤	COOPER FOIL	2	DOUBLE-SIDED CONDUCTIVE COOPER FOIL 18U" W25mm*1.55mm
④	SCREW	4	SCREW:#4--40UNC L47mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
③	OUT JACKET	43.5g	BEIGE(V-29) 40P PVC(MOULD NO:WM-113)
②	IN JACKET	8g	CLEAR LDPE(MOULD NO:NM-049)
①	CABLE	1	HDD 15P MALE PIN G/F-SHELL-NICKEL,INSULATION COLOR:BLUE,MISSING 9PIN. SOLDER TYPE: UL2919 28AWG(T/0.127 TO)*30AX(T/5 OHMS)+28AWG(T/0.127 TO)*4C+AL/MY+D-W(T/0.16 TO)+ BR(80%)+OUTTER JACKET COROL:BEIGE(V-29) 0D:8.0±0.15mm, L=5000±20mm.

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	730-10079-00500
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	

