

623 Receptacle angled rotatable

speedtec - ready

12-pin insulation insert Code 0° housing code 1 flange mount /Flange 25x25 Anti-vibration o-ring

A ED C 175 NN 00 00 1215 000 A G C 175 N 00 00 1215 000



Contact Arrangement



mating view

Contacts (not part of product contents)

Tools (not part of product contents)


© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this attice are for reference neurose and are subject to change without to the particular purpose. in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH Bernrieder Straße 15 94559 Niederwinkling, Deutschland Tel.: +49 9962 2002-0 Fax: +49 9962 2002-70 E-Mail: intercontec@te.com Web: www.intercontec.biz



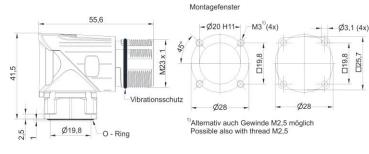

Main Dimensions Receptacle angled rotatable

*for max, wire cross-section pay attention to the cross-section of used contacts

1

025,7

Technical Data number of pins temperature range protection type rotation range

mating cycles

pollution degree

Material

seals

housing insulation insert

over voltage category max. height for operation

Electrical Data rated current rated voltage rated insulation voltage (L-L)

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

3 III 2000 m

12

330°

signal

2500 V

500

max. 7 A* 160 V (AC/DC)

-20 °C to 130 °C

when connected IP 66/67

zinc diecast / chromated PBT, UL 94 / V0 FKM