
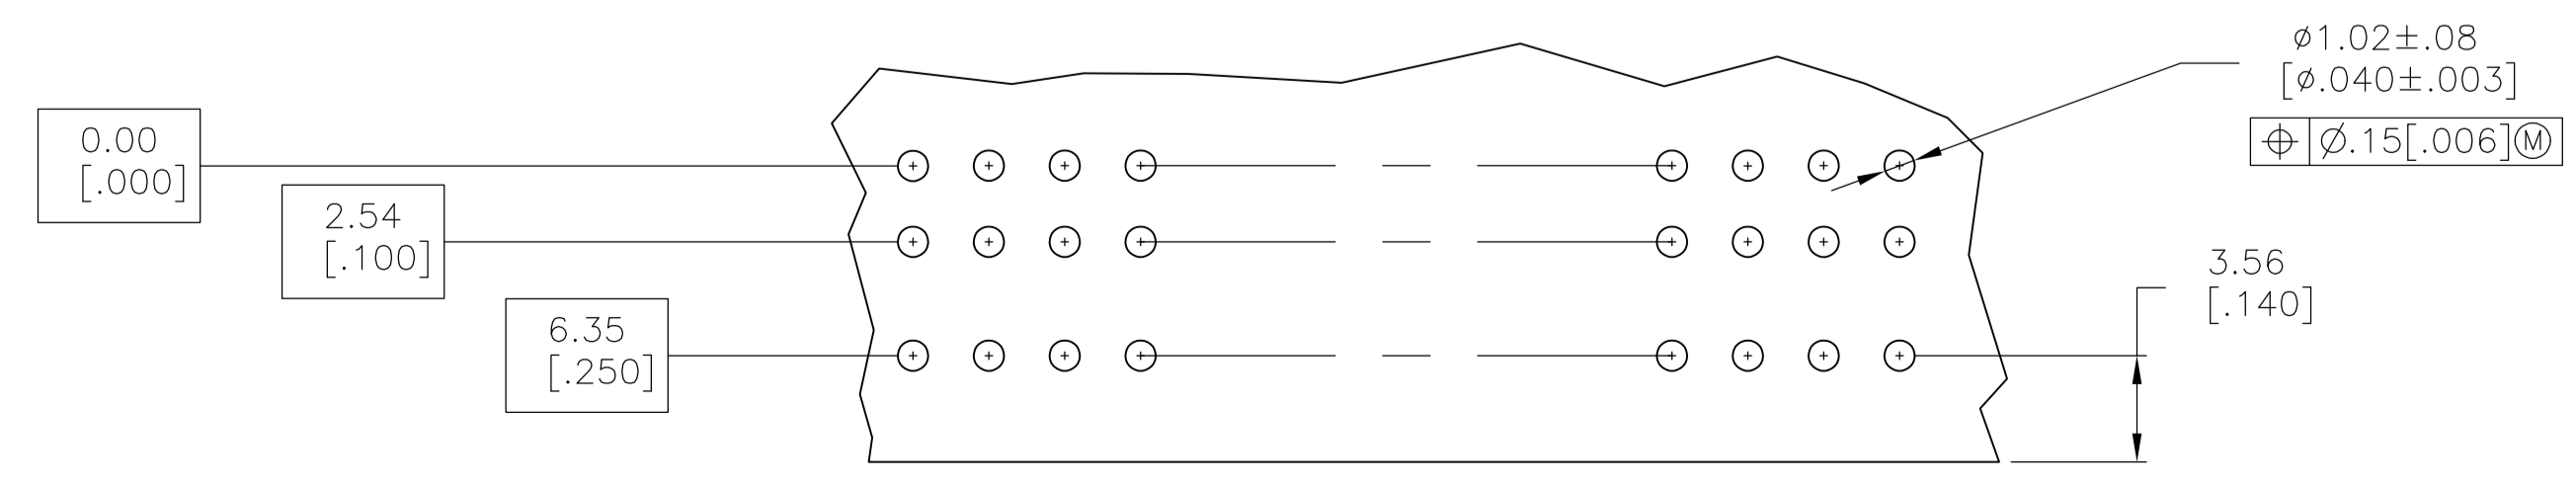
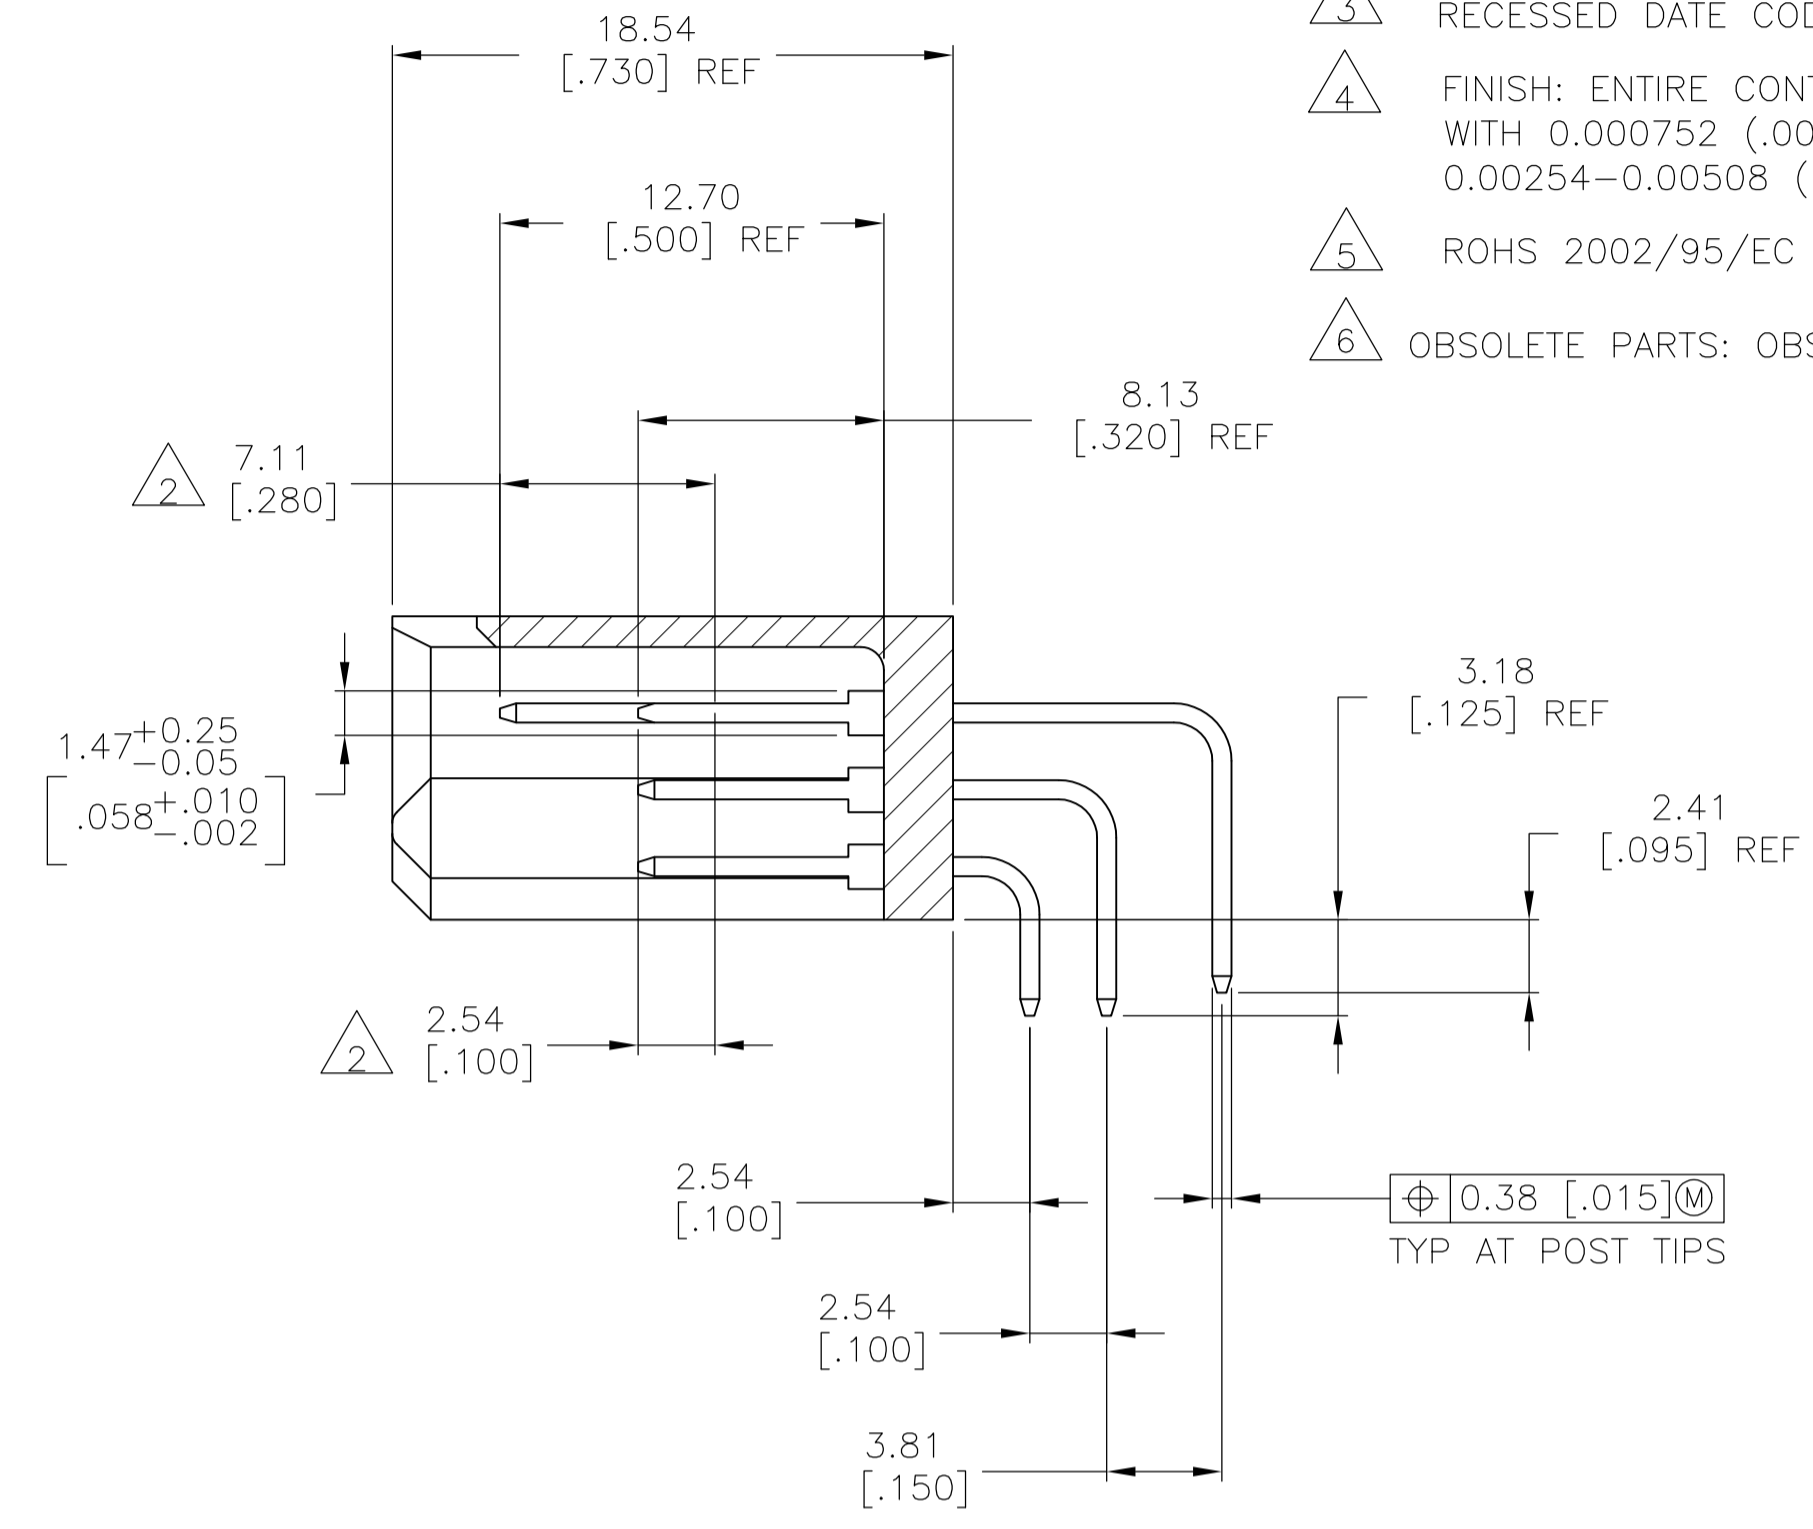


| LOC | | DIST | | REVISIONS | | | |
|-----|---------------------------|------|---------|-----------|------|--------|--|
| AD | 00 | REV | DATE | BY | CHKD | APPROV | |
| A2 | ECO-07-0006515 | | 19JUN07 | MB | JO | | |
| A3 | REVISED PER ECO-09-021510 | | 14SEP09 | KK | AEG | | |

- 1 FINISH: ENTIRE CONTACT TO BE NICKEL PLATED (.00127[.000050] THICK) WITH .000762[.000030] GOLD ON CONTACT AREA AND TIN-LEAD ON SOLDER TAIL
- 2 POINT-OF-MEASUREMENT OF PLATING THICKNESS
- 3 RECESSED DATE CODE AND CSA LOGO AT BASE OF HOUSING
- 4 FINISH: ENTIRE CONTACT TO BE NICKEL PLATED 0.00127 (.000050) THICK WITH 0.000752 (.000030) GOLD ON CONTACT AREA AND 0.00254-0.00508 (.000100-.000200) MATTE TIN ON SOLDER LEADS
- 5 ROHS 2002/95/EC COMPLIANT
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

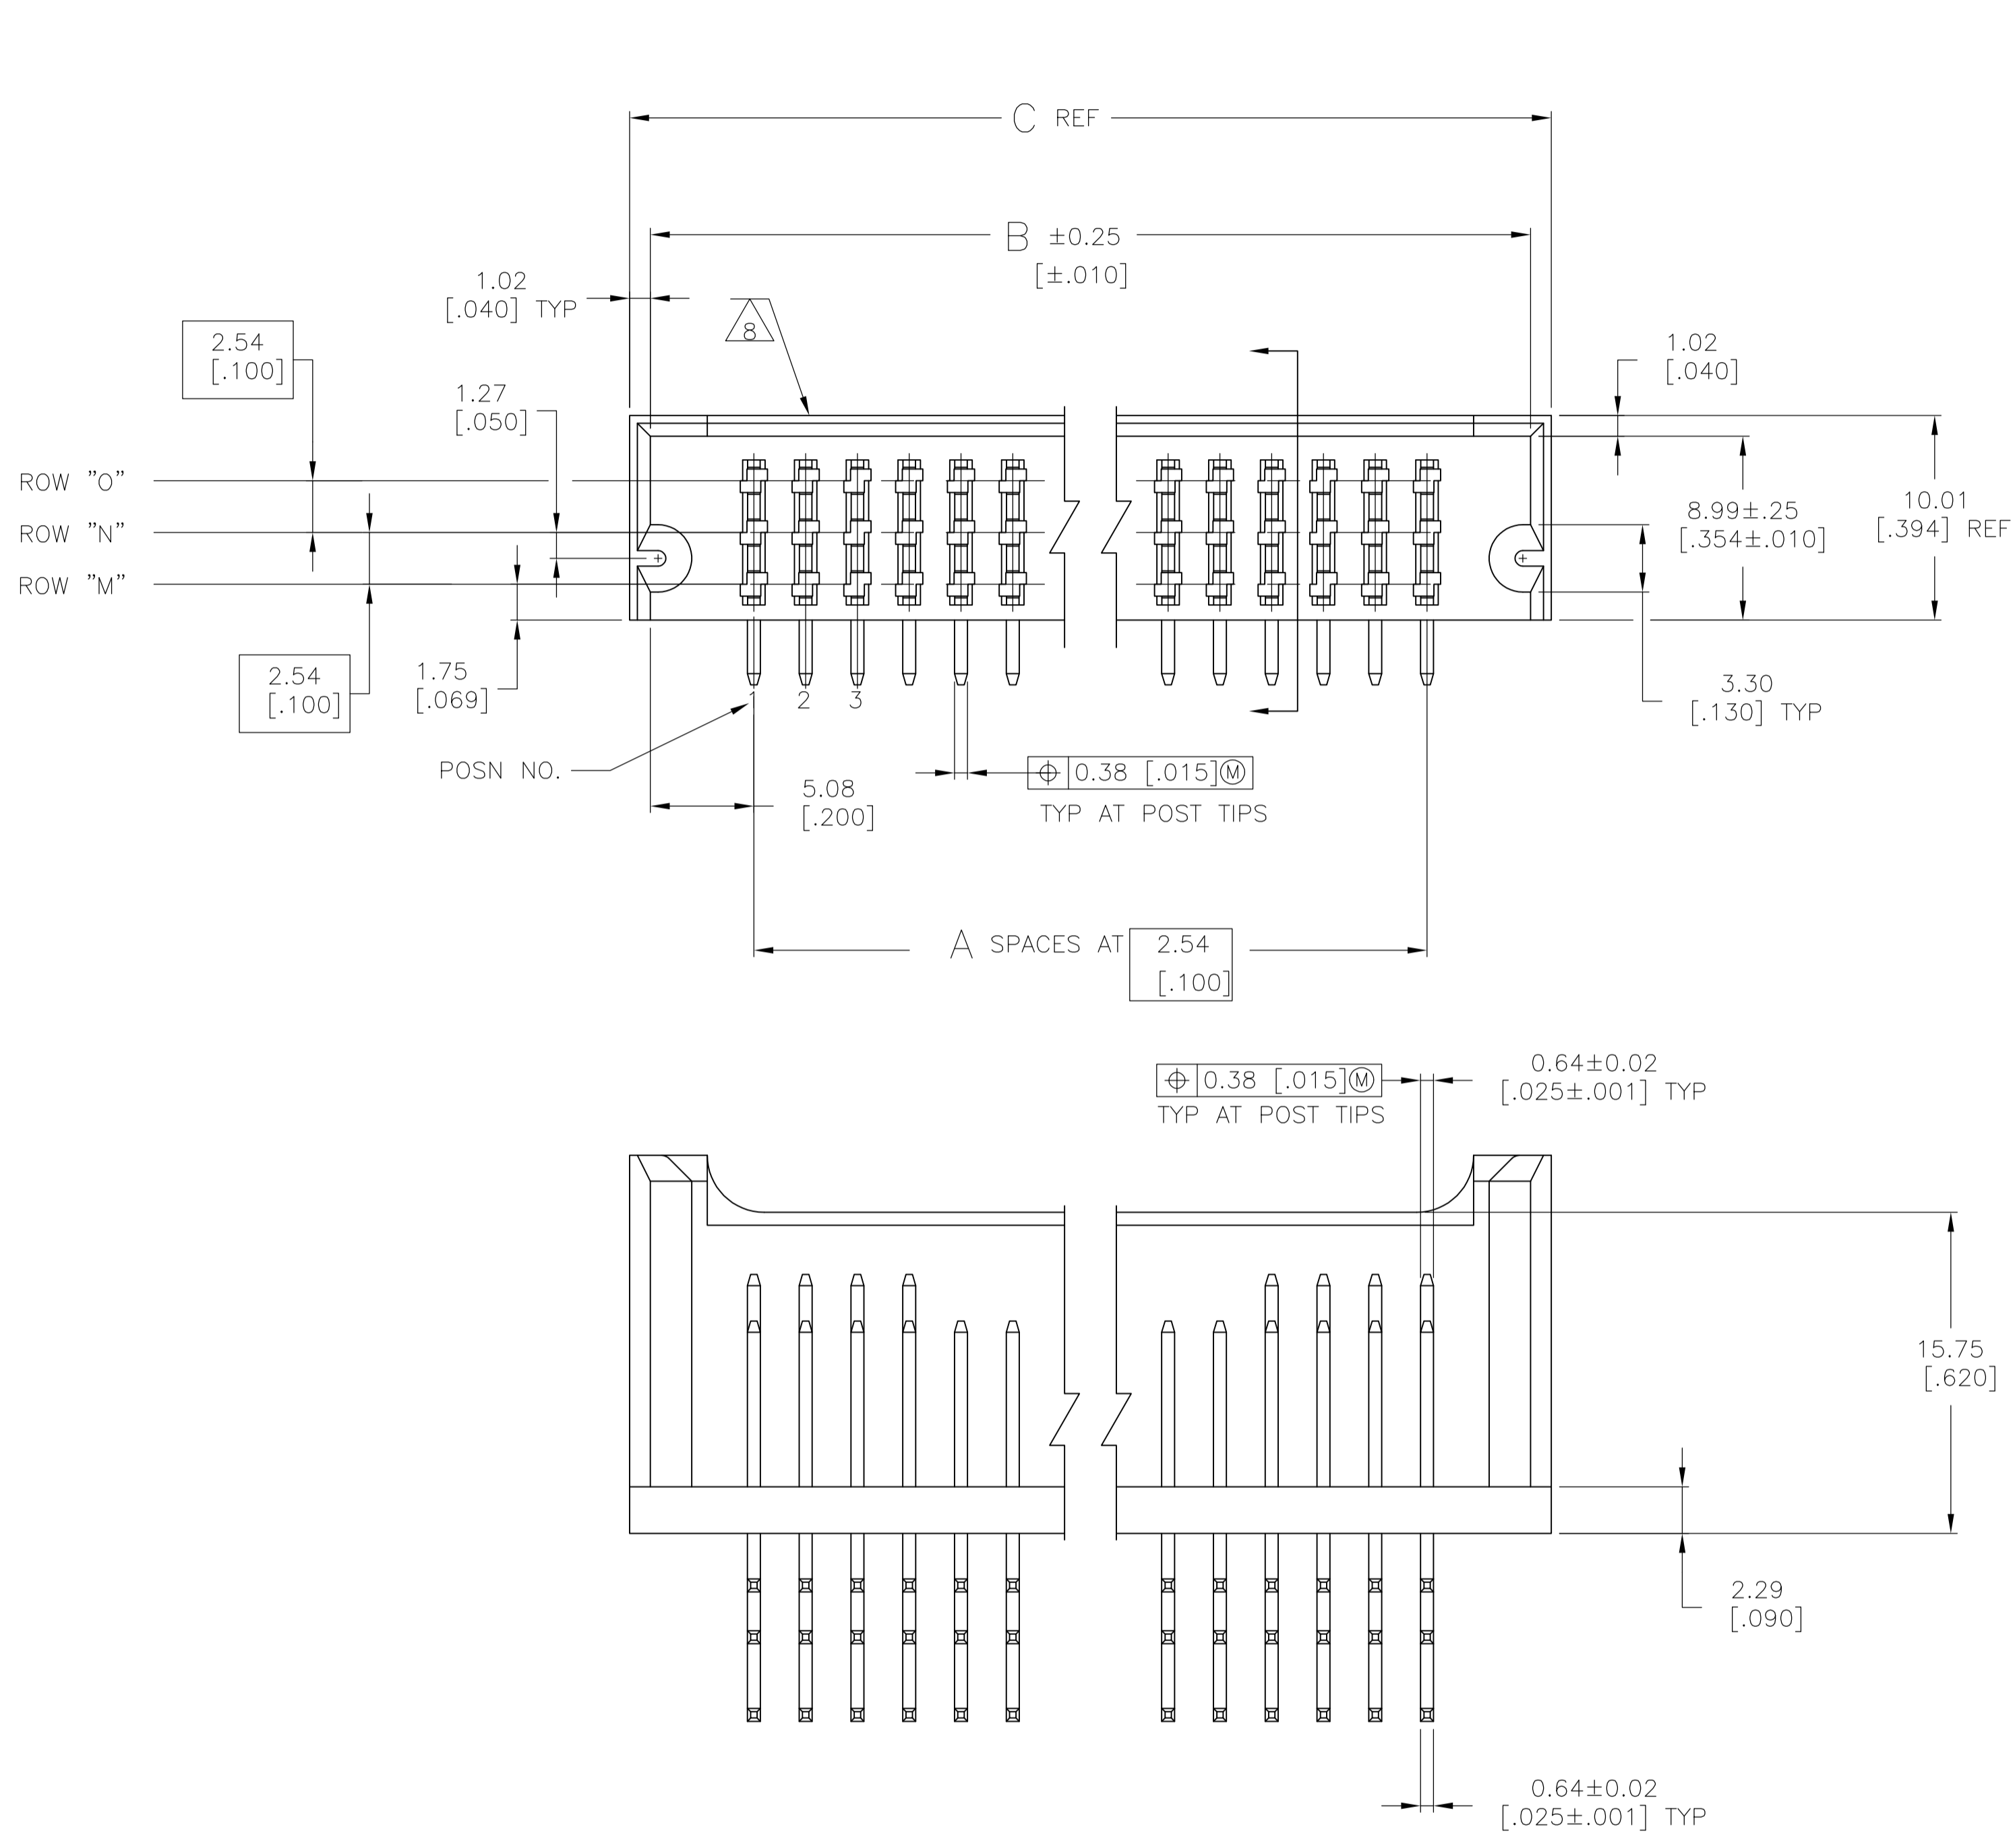

| | | | | | | | |
|--------------|------------------------------|--------|---------------|---------------|----|------------|-------------|
| 6 SUPERSEDED | 1,2,3,4,5,6,7,8 | 4 | 45.21 [1.780] | 43.18 [1.700] | 13 | 42 | 5-535629-1 |
| | 1,2,3,4,5,6,7,8 | 1 | 45.21 [1.780] | 43.18 [1.700] | 13 | 42 | 535629-1 |
| | ROW "O" | | | | | | |
| | SELECT LOADED .498 LONG POST | FINISH | C | B | A | NO OF POSN | PART NUMBER |

| | | | | |
|---|------------|--|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DIN J. MARTINELLI 01SEP92 | Tyco Electronics Corporation Harrisburg, PA 17105-3608 | |
| DIMENSIONS: mm [INCHES] | | CHK D. SARVER 16SEP92 | AMPMODU 2PC 3 ROW R/A HEADER ASSEMBLY, .150 SPACING BETWEEN ROW 2 AND 3 SOLDER LEADS | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APP'D D. SARVER 16SEP92 | SIZE CAGE CODE DRAWING NO RESTRICTED TO | |
| 0 PLC ± - | 1 PLC ± - | A1 00779 C=535629 | | |
| 2 PLC ± .13[.005] | 3 PLC ± - | WEIGHT - | | |
| 4 PLC ± - | ANGLES ± - | CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV A3 | | |
| MATERIAL HARD BRASS OVER TIGER BOND CONTACT SUPER ALLOY | | FINISH SEE TABLE | | |